

Draft
Second Five-Year Review Report for
Load Lines 1 – 4
Load Line 12
Winklepeck Burning Grounds
Ramsdell Quarry Landfill
Camp Ravenna Joint Military Training Center
Portage and Trumbull Counties, Ohio

March 21, 2017

Prepared for:



Army National Guard Directorate
Camp Ravenna Joint Military Training Center
U.S. Army Environmental Command

Prepared by:



**US Army Corps
of Engineers®**

U.S. Army Corps of Engineers
Buffalo District
1776 Niagara Street
Buffalo, New York 14207

REPORT DOCUMENTATION PAGE					<i>Form Approved</i> <i>OMB No. 0704-0188</i>							
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.												
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.												
1. REPORT DATE (DD-MM-YYYY) 21-03-2017		2. REPORT TYPE Draft		3. DATES COVERED (From - To) May 2016 - August 2017								
4. TITLE AND SUBTITLE Draft Five-Year Review Report for Load Lines 1 - 4, Load Line 12, Winklepeck Burning Grounds, Ramsdell Quarry Landfill Camp Ravenna Joint Military Training Center Portage and Trumbull Counties, Ohio				5a. CONTRACT NUMBER N/A								
				5b. GRANT NUMBER N/A								
				5c. PROGRAM ELEMENT NUMBER N/A								
6. AUTHOR(S) Barker, Michelle, C Keil, Karen, G Stachowski, James, R				5d. PROJECT NUMBER N/A								
				5e. TASK NUMBER N/A								
				5f. WORK UNIT NUMBER N/A								
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Corps of Engineers - Buffalo 1776 Niagara Street Buffalo, New York 14207				8. PERFORMING ORGANIZATION REPORT NUMBER N/A								
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> National Guard Bureau 111 S. George Mason Dr. Arlington, VA 22204 </div> <div style="width: 45%;"> US Army Environmental Command 2450 Connell Rd., Building 2264 Fort Sam Houston, TX 78234 </div> </div>				10. SPONSOR/MONITOR'S ACRONYM(S) NGB								
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) N/A								
12. DISTRIBUTION/AVAILABILITY STATEMENT Public												
13. SUPPLEMENTARY NOTES None												
14. ABSTRACT Second five-year review report of remedial actions at Camp Ravenna sites RVAAP-01 (Ramsdell Quarry Landfill), RVAAP-05, (Winklepeck Burning Grounds), RVAAP-08 (Load line 1), RVAAP-09 (Load line 2), RVAAP-10 (Load line 3), RVAAP-08 (Load line 1), RVAAP-11 (Load line 4), and RVAAP-12 (Load line 12). The report summarizes issues identified during the review and includes recommendations and follow-up actions for them.												
15. SUBJECT TERMS Five-Year Review, Load Lines 1, 2, 3, 4, and 12, Winklepeck Burning Grounds, and Ramsdell Quarry Landfill												
16. SECURITY CLASSIFICATION OF: <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <tr> <td style="width: 33%; padding: 2px;">a. REPORT</td> <td style="width: 33%; padding: 2px;">b. ABSTRACT</td> <td style="width: 33%; padding: 2px;">c. THIS PAGE</td> </tr> <tr> <td style="text-align: center; padding: 2px;">UC</td> <td style="text-align: center; padding: 2px;">UC</td> <td style="text-align: center; padding: 2px;">UC</td> </tr> </table>			a. REPORT	b. ABSTRACT	c. THIS PAGE	UC	UC	UC	17. LIMITATION OF ABSTRACT SAR		18. NUMBER OF PAGES 382	
a. REPORT	b. ABSTRACT	c. THIS PAGE										
UC	UC	UC										
19a. NAME OF RESPONSIBLE PERSON James R Stachowski, PE					19b. TELEPHONE NUMBER (Include area code) (716) 879-4252							

PLACEHOLDER PAGE FOR:

Documentation of Ohio EPA Approval of Final Document

(Documentation to be provided once approval is issued)

Draft
Second Five-Year Review Report
for
Load Lines 1 – 4
Load Line 12
Winklepeck Burning Grounds
Ramsdell Quarry Landfill

Camp Ravenna Joint Military Training Center
Portage and Trumbull Counties, Ohio

March 21, 2017

Prepared for:
Army National Guard Directorate
Camp Ravenna Joint Military Training Center
U.S. Army Environmental Command

Approved by:

Date:

Brian Crock
MJR, Ohio Army National Guard
Garrison Commander – CRJMTC

DOCUMENT DISTRIBUTION

**Draft Second Five-Year Review Report for Load Lines 1-4, Load Line 12, Winklepeck Burning
Grounds, Ramsdell Quarry Landfill, Camp Ravenna Joint Military Training Center**

Name/Organization	Number of Printed Copies	Number of Electronic Copies
Mark Leeper, ARNG-ILE-IED	0	1
Kevin Sedlak, ARNG – Camp Ravenna	0	1
Katie Tait, OHARNG – Camp Ravenna	1	0
Megan Oravec, Project Manager, Ohio EPA - NEDO	1	3
Bob Princic, Ohio EPA - NEDO	0	Email/Transmittal letter
Rod Beals, Ohio EPA - CO	0	Email/Transmittal letter
Tom Schneider, Ohio EPA – CO	0	Email/Transmittal letter
Craig Coombs, USACE – Louisville District	0	Email/Transmittal letter
USACE – Buffalo District	0	1
Gail Harris, AR Manager – Camp Ravenna	2	2

AR = Administrative Record

ARNG - Camp Ravenna = Army National Guard – Camp Ravenna Joint Military Training

ARNG-IED = Army National Guard – Installation Environmental Division

OHARNG – Camp Ravenna = Ohio Army National Guard – Camp Ravenna Joint Military Training Center

Ohio EPA – CO = Ohio Environmental Protection Agency – Central Office

Ohio EPA – NEDO = Ohio Environmental Protection Agency Northeast District Office

USACE = U.S. Army Corps of Engineers

TABLE OF CONTENTS

EXECUTIVE SUMMARY	xi
FIVE-YEAR REVIEW SUMMARY FORM	xv
1.0 INTRODUCTION.....	1
2.0 SITE CHRONOLOGY.....	10
3.0 BACKGROUND	19
3.1 PHYSICAL CHARACTERISTICS.....	19
3.1.1 Load Line 1	19
3.1.2 Load Line 2	19
3.1.3 Load Line 3	19
3.1.4 Load Line 4	20
3.1.5 Load Line 12	20
3.1.6 Winklepeck Burning Grounds	20
3.1.7 Ramsdell Quarry Landfill	20
3.2 GEOLOGY.....	21
3.2.1 Load Line 1	21
3.2.2 Load Line 2	21
3.2.3 Load Line 3	21
3.2.4 Load Line 4	21
3.2.5 Load Line 12	21
3.2.6 Winklepeck Burning Grounds	22
3.2.7 Ramsdell Quarry Landfill	22
3.3 HYDROLOGY	22
3.3.1 Load Lines	22
3.3.2 Winklepeck Burning Grounds	23
3.3.3 Ramsdell Quarry Landfill	23
3.4 LAND AND RESOURCE USE	24
3.5 HISTORY OF CONTAMINATION.....	24
3.5.1 Load Lines 1 Through 4.....	24
3.5.2 Load Line 12	25
3.5.3 Winklepeck Burning Grounds	25
3.5.4 Ramsdell Quarry Landfill	25
3.6 INITIAL RESPONSE.....	25
3.6.1 Load Lines 1 Through 4.....	25
3.6.2 Load Line 12	26
3.6.3 Winklepeck Burning Grounds	26
3.6.4 Ramsdell Quarry Landfill	26
3.7 BASIS FOR TAKING ACTION	26

59	3.7.1	Load Lines 1 Through 4.....	26
60	3.7.2	Load Line 12.....	27
61	3.7.3	Winklepeck Burning Grounds	27
62	3.7.4	Ramsdell Quarry Landfill	27
63	4.0	REMEDIAL ACTIONS	28
64	4.1	LOAD LINES 1 THROUGH 4.....	28
65	4.1.1	Remedy Selection	28
66	4.1.2	Remedy Implementation.....	29
67	4.1.3	Maintenance and Monitoring.....	31
68	4.2	LOAD LINE 12	31
69	4.2.1	Remedy Selection	31
70	4.2.2	Remedy Implementation.....	32
71	4.2.3	Maintenance and Monitoring.....	33
72	4.3	WINKLEPECK BURNING GROUNDS	33
73	4.3.1	Remedy Selection	33
74	4.3.2	Remedy Implementation.....	35
75	4.3.3	Maintenance and Monitoring.....	36
76	4.4	RAMSDELL QUARRY LANDFILL	37
77	4.4.1	Remedy Selection	37
78	4.4.2	Remedy Implementation.....	39
79	4.4.3	Maintenance and Monitoring.....	40
80	5.0	PROGRESS SINCE LAST REVIEW.....	41
81	6.0	FIVE-YEAR REVIEW PROCESS	43
82	6.1	ADMINISTRATIVE COMPONENTS.....	43
83	6.2	COMMUNITY NOTIFICATION AND INVOLVEMENT	43
84	6.3	DOCUMENT REVIEW	44
85	6.4	DATA REVIEW.....	44
86	6.4.1	Load Lines 1 Through 4.....	44
87	6.4.2	Load Line 12	46
88	6.4.3	Winklepeck Burning Grounds	46
89	6.4.4	Ramsdell Quarry Landfill	46
90	6.5	SITE INSPECTIONS.....	50
91	6.5.1	Load Lines	50
92	6.5.2	Winklepeck Burning Grounds	50
93	6.5.3	Ramsdell Quarry Landfill	50
94	6.6	INTERVIEWS.....	50
95	6.6.1	Army National Guard Directorate	51
96	6.6.2	Camp Ravenna	51

97	6.6.3	USACE Louisville District	51
98	6.6.4	Vista Sciences Corporation.....	52
99	6.6.5	Ohio EPA	52
100	6.6.6	Restoration Advisory Board	53
101	7.0	TECHNICAL ASSESSMENT.....	54
102	7.1	LOAD LINES 1 THROUGH 4.....	54
103	7.1.1	Question A:	54
104	7.1.2	Question B:	54
105	7.1.3	Question C:	54
106	7.1.4	Summary	55
107	7.2	LOAD LINE 12	55
108	7.2.1	Question A:	55
109	7.2.2	Question B:	55
110	7.2.3	Question C:	56
111	7.2.4	Summary	56
112	7.3	WINKLEPECK BURNING GROUNDS	56
113	7.3.1	Question A:	56
114	7.3.2	Question B:	57
115	7.3.3	Question C:	57
116	7.3.4	Summary	57
117	7.4	RAMSDELL QUARRY LANDFILL	58
118	7.4.1	Question A:	58
119	7.4.2	Question B:	58
120	7.4.3	Question C:	58
121	7.4.4	Summary	58
122	8.0	ISSUES.....	59
123	9.0	RECOMMENDATIONS AND FOLLOW-UP ACTIONS	60
124	10.0	PROTECTIVENESS STATEMENTS.....	61
125	10.1	LOAD LINES 1 THROUGH 4	61
126	10.2	LOAD LINE 12.....	61
127	10.3	WINKLEPECK BURNING GROUNDS.....	61
128	10.4	RAMSDELL QUARRY LANDFILL.....	61
129	11.0	NEXT REVIEW.....	62
130	TABLES		
131	Table 1	Summary of Camp Ravenna Environmental Restoration Program Sites	
132	Table 2	Chronology of Site Events	

133	Table 3	COCs in Soil and Dry Sediment at Load Lines 1 Through 4
134	Table 4	Load Lines 1 Through 4 Soil Cleanup Goals
135	Table 5	Volume of PCB Contaminated and Non-Hazardous Excavated Soil and Dry
136		Sediment from Load Lines 1 Through 4
137	Table 6	Winklepeck Burning Grounds Soil Cleanup Goals for 2008 ROD Remedial
138		Action
139	Table 7	Winklepeck Burning Grounds Soil Cleanup Goals for 2015 ESD Remedial Action
140	Table 8	Volume of Excavated Soil and Dry Sediment from Winklepeck Burning Grounds
141	Table 9	Ramsdell Quarry Landfill Cleanup Goals
142	Table 10	Issues Identified and Recommendations Provided in the First Five-Year Review
143	Table 11	Pre-remedial Groundwater Conditions at Load Lines 1 Through 4
144	Table 12	Current Issues for Camp Ravenna Sites That Affect Protectiveness
145	Table 13	Recommendations to Address Issues That Affect Protectiveness at Camp Ravenna
146		Sites
147	Table 14	Recommendations for Concerns That Do Not Affect Protectiveness at Camp
148		Ravenna Sites

149 ATTACHMENTS

150	Attachment 1	Figures
151	Attachment 2	Documents Reviewed
152	Attachment 3	Decision Document Summaries
153	Attachment 4	Site Inspection Checklists
154	Attachment 5	Photographic Record
155	Attachment 6	Interview Records
156	Attachment 7	ARAR Evaluation
157	Attachment 8	Risk Assessment and Toxicology Evaluation
158	Attachment 9	Public Notices
159	Attachment 10	Groundwater Information and Data
160	Attachment 11	Soil and Dry Sediment Data
161	Attachment 12	Responses to Regulator Comments

162 FIGURES

163	Figure 1	Camp Ravenna Site Location
-----	----------	----------------------------

164	Figure 2	Areas of Concern Evaluated in Five-Year Review
165	Figure 3	Load Line #1
166	Figure 4	Load Line #2
167	Figure 5	Load Line #3
168	Figure 6	Load Line #4
169	Figure 7	Load Line #12
170	Figure 8	Winklepeck Burning Grounds
171	Figure 9	Ramsdell Quarry Landfill

ACRONYMS AND ABBREVIATIONS

172		
173	ACM	asbestos-containing material
174	Alliant	Alliant Corporation
175	AMEC	AMEC Environment and Infrastructure, Inc.
176	amsl	above mean sea level
177	AOC	area of concern
178	ARAR	applicable or relevant and appropriate requirement
179	ARNG	Army National Guard
180	AST	above ground storage tank
181	bgs	below ground surface
182	BRACD	Base Realignment and Closure Division
183	CB&I	CB&I Federal Services, Inc.
184	CERCLA	Comprehensive Environmental Response, Compensation and Liability Act of
185		1980
186	COC	constituent of concern
187	COPC	constituent of potential concern
188	DERP	Defense Environmental Restoration Program
189	DQO	data quality objective
190	ECC	Environmental Chemical Corporation
191	EE/CA	engineering evaluation/cost analysis
192	EQM	Environmental Quality Management, Inc.
193	ER,A	Environmental Restoration, Army
194	ESD	explanation of significant differences
195	FS	feasibility study
196	ft	foot (feet)
197	ft ²	square feet
198	FYR	five-year review
199	GIS	geographic information system
200	HI	hazard index
201	HMX	octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine
202	HVAC	heating, ventilation, and air conditioning
203	ILCR	incremental lifetime cancer risk
204	IRA	interim remedial action

205	IRP	Installation Restoration Program
206	Leidos	Leidos Engineering of Ohio, Inc.
207	LUC	land use control
208	MEC	munitions and explosives of concern
209	mg/kg	milligrams per kilogram
210	MKM	MKM Engineers, Inc.
211	MMRP	Military Munitions Response Program
212	MPPEH	material potentially presenting an explosive hazard
213	MRS	Munitions Response Site
214	NA	not applicable
215	NCP	National Contingency Plan
216	NFA	no further action
217	NGB	National Guard Bureau
218	NPL	National Priorities List
219	OAC	Ohio Administrative Code
220	OHARNG	Ohio Army National Guard
221	Ohio EPA	Ohio Environmental Protection Agency
222	PA	preliminary assessment
223	PAH	polycyclic aromatic hydrocarbon
224	PCB	polychlorinated biphenyl
225	PIKA	PIKA International, Inc.
226	PMP	Property Management Plan
227	PP	proposed plan
228	Prudent	Prudent Technologies, Inc.
229	QA/QC	quality assurance/quality control
230	RAB	Restoration Advisory Board
231	RA(C)	remedial action (construction)
232	RAO	remedial action objective
233	RCRA	Resource Conservation Recovery Act
234	RDX	1,3,5-trinitroperhydro-1,3,5-triazine
235	RI	remedial investigation
236	ROD	record of decision
237	RVAAP	Ravenna Army Ammunition Plant

238	SAIC	Science Applications International Corporation
239	Shaw	Shaw E&I/Shaw Environmental, Inc.
240	SI	site inspection
241	SVOC	semi-volatile organic compound
242	SWPPP	storm water pollution prevention plan
243	TBC	to-be-considered
244	TCRA	time-critical removal action
245	TEC-Weston	TEC-Weston Joint Venture
246	TNT	trinitrotoluene
247	USACE	U.S. Army Corps of Engineers
248	USAEHA	U.S. Army Environmental Health Administration
249	USEPA	U.S. Environmental Protection Agency
250	URS	URS Corporation
251	UST	underground storage tank
252	UU/UE	unlimited use/unrestricted exposure
253	UXO	unexploded ordnance
254	Vista	Vista Sciences Corporation
255	VOC	volatile organic compound
256	yd ³	cubic yards

EXECUTIVE SUMMARY

This is the second five-year review of remedial actions taken at Installation Restoration Program sites on Camp Ravenna: Load Line 1, Load Line 2, Load Line 3, Load Line 4, Load Line 12, Winklepeck Burning Grounds, and Ramsdell Quarry Landfill. The purpose of this review is to determine if remedial actions implemented at these sites are and will continue to be protective of human health and the environment.

The U.S. Army prepared this review consistent with applicable requirements of the Comprehensive Environmental Response, Compensation, and Liability Act § 121 and the National Oil and Hazardous Substances Pollution Contingency Plan. This five-year review is required because hazardous substances remain at the sites at levels that do not allow for unlimited use and unrestricted exposure. The methods, findings, and conclusions of the review, identified issues, and recommendations are documented in this report. The triggering action for this five-year review was completion of the first five-year review on August 31, 2012.

Camp Ravenna

Camp Ravenna, formerly known as the Ravenna Army Ammunition Plant (RVAAP), is located in northeastern Ohio within Portage and Trumbull counties. The installation was constructed in 1940 and 1941 and used for ammunition assembly, loading, and demilitarization activities. It originally encompassed 21,683 acres. Administrative accountability for the property was transferred to the U.S. Property and Fiscal Officer in several transfers with the last being in September 2013. The property is licensed to the Ohio Army National Guard (OHARNG) as a military training site known as Camp Ravenna Joint Military Training Center (Camp Ravenna). The installation is approximately one mile northwest of the city of Newton Falls (Figure 1). The surrounding areas are predominately woodland or farm acreage with the remainder residential. The location of sites evaluated in this five-year review is shown in Figure 2.

Load Lines 1 Through 4

Industrial operations at RVAAP primarily consisted of 12 munitions assembly facilities referred to as “load lines.” Load Lines 1, 2, 3, and 4 are 150, 212, 167, and 125 acres, respectively, and were used for industrial operations associated with munitions loading, assembly, packaging, reconditioning, demilitarization, and quality assurance/quality control operations. Explosives (2,4,6-trinitrotoluene [TNT], octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine [HMX], and 1,3,5-trinitroperhydro-1,3,5-triazine [RDX]) were handled, processed, loaded into large-caliber shells, and removed from munitions during demilitarization activities. These operations, together with ancillary activities associated with maintenance, power generation, and wastewater treatment, resulted in the contamination of soil and dry sediment in the vicinity of former site buildings. Chemical contaminants detected in soil and dry sediment above risk-based cleanup goals consisted of inorganics (aluminum, antimony, arsenic, barium, cadmium, hexavalent chromium, lead, and manganese), explosives (2,4,6-TNT and RDX), polychlorinated biphenyls (PCBs) (Aroclor-1254), and polycyclic aromatic hydrocarbons (PAHs) (benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene).

The selected remedy consisted of excavation and off-site disposal of contaminated soil and dry sediment, groundwater monitoring, and maintenance of former building slabs to prevent leaching of potentially contaminated soil and dry sediment. An Interim Record of Decision (ROD) for

soil and dry sediment was signed on June 4, 2007 and the remedial actions were implemented during August to November 2007. Subsequent environmental activities were conducted that included removal of the building slabs, characterization and removal of chemically contaminated soil and dry sediment beneath and adjacent to the slabs, and preparation of a feasibility study addendum. Groundwater monitoring has been performed as part of a facility-wide groundwater monitoring program.

According to the Interim ROD, the intended future use of the sites is for OHARNG mounted training. To date, the OHARNG has not used the sites.

Load Line 12

Load Line 12 is an 80-acre parcel situated in the southeastern portion of the Camp Ravenna. It was used for the production of ammonium nitrate and aluminum chloride and for demilitarization activities to recover explosives from bombs. A wastewater treatment plant was also operated on the site. Remedial activities performed prior to the ROD removed large quantities of explosives-contaminated soil. Only arsenic-contaminated soil and dry sediment remained within a portion of a main drainage ditch at levels above risk-based cleanup goals.

The selected remedy consisted of excavation and off-site disposal of contaminated soil and dry sediment, and implementation of land use controls (LUCs). A ROD was signed on August 10, 2009 and the remedial action was implemented in 2010. LUCs have not been officially implemented for Load Line 12 through a Property Management Plan (PMP). Subsequent environmental activities included the preparation of a feasibility study addendum.

According to the ROD, the intended future use of the site is for OHARNG mounted training. To date, the OHARNG has not used the site.

Winklepeck Burning Grounds

Winklepeck Burning Grounds was used for open burning activities in unlined pits, pads, on roads, along roadside ditch lines, and in refractory-lined trays. Prior to 1980, burning was conducted on the bare ground, and the ash was abandoned at the site. Materials that were burned included TNT, RDX, Composition B, antimony sulfide, lead azide, propellants, black powder, waste oils, sludge from the load lines, domestic wastes, explosives-contaminated waste, and small amounts of laboratory chemicals. Chemical contaminants detected in soils and dry sediments above risk-based cleanup goals consisted of 2,4,6-TNT, RDX and benzo(a)pyrene. Asbestos-containing materials (ACM) also were present at former burning pads 61, 61A and 70. The total burning ground area consists of approximately 200 acres in the central portion of Camp Ravenna. The site is used as a Mark 19 Grenade Machine Gun range.

The selected remedy consisted of the excavation and off-site disposal of chemically contaminated soil and dry sediment from three former burning pads (61, 61A, and 67) and of ACM-contaminated soil and dry sediment. It also included screening and removal of any munitions. A ROD was signed August 19, 2008 and the remedial action was completed in 2008 and 2009. LUCs have been implemented through a PMP. Future plans for the site include development and use as a Multipurpose Machine Gun range. Subsequent environmental activities have been performed that included preparation of a remedial investigation/feasibility

study (RI/FS) supplement, an explanation of significant differences to enable development of the Multipurpose Machine Gun range, and a remedial design for post ROD changes.

Ramsdell Quarry Landfill

Ramsdell Quarry Landfill is a 14-acre site located in the eastern section of Camp Ravenna. The site was an abandoned quarry with a 4-acre unlined landfill that was used for solid domestic waste. Land-surface burning also was performed outside of the landfill to destroy waste explosives from Load Line 1 and napalm bombs. Chemical contaminants detected in soil and dry sediment above risk-based cleanup goals consisted of PAHs (benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, and indeno(1,2,3-cd) pyrene).

A ROD was signed on August 20, 2009 that established excavation and off-site disposal of chemically contaminated soil and dry sediment and LUCs as the selected remedy. Remediation started in 2010 and was not completed because ACM was encountered in the subsurface. The presence of ACM in the landfill was not known prior to discovery and the ROD did not account for this material. The excavation was stopped once ACM was no longer visible and excavated ACM was disposed off-site. Not all of the chemically contaminated areas were remediated. An engineering evaluation was performed and a ROD amendment was prepared. The ROD amendment remedy consisted of security fencing with warning signs installed around the site and removal of ACM from the ground surface. It was implemented in 2014 and routine inspections are being performed to verify that the LUCs are functioning as intended.

Protectiveness Statements

The remedy at Load Lines 1 - 4 currently protects human health and the environment because:

- Contaminated soil/dry sediment identified in the Interim ROD was remediated

However, in order for the remedy to be protective in the long-term, the following action needs to be taken to ensure protectiveness:

- Determine if unacceptable risk associated with remaining contaminated soils at Load Lines 1 - 4 exists and remediate in a manner consistent with the Interim ROD, if necessary to mitigate risk

The remedy at Load Line 12 is protective of human health and the environment because:

- Contaminated soil/dry sediment identified in the ROD was remediated
- The site is not being used and access is restricted by a perimeter fence with warning signs

The remedy at Winklepeck Burning Grounds is protective of human health and the environment because:

- Contaminated soil/dry sediment identified in the ROD was remediated
- LUCs have been implemented; they are being employed and maintained in accordance with the ROD

The remedy at Ramsdell Quarry Landfill is protective of human health and the environment because:

- 376 • Contaminated soil/dry sediment identified in the ROD was partially remediated
- 377 • A perimeter fence with warning signs was installed and surficial ACM was removed by
- 378 non-intrusive/no-digging methods in accordance with the ROD amendment
- 379 • LUCs have been implemented; training, access restrictions, and land uses are being
- 380 performed/maintained consistent with the ROD

FIVE-YEAR REVIEW SUMMARY FORM

SITE IDENTIFICATION		
Site Name: Camp Ravenna		
EPA ID: OH5210020736		
Region: 5	State: OH	City/County: Ravenna/Portage and Trumbull Counties
SITE STATUS		
NPL Status: Non-NPL		
Multiple AOCs? Yes Load Lines 1 - 4 Load Line 12 Winklepeck Burning Grounds Ramsdell Quarry Landfill	Has the site achieved construction completion? No	
REVIEW STATUS		
Lead agency: Other Federal Agency If “Other Federal Agency” was selected above, enter Agency name: U.S. Army		
Author name (Federal or State Project Manager): Mark Leeper		
Author affiliation: Army National Guard		
Review period: May 21, 2016 – August 31, 2017		
Date of site inspection: August 10, 2016		
Type of review: Statutory		
Review number: 2		
Triggering action date: August 31, 2012		
Due date (five years after triggering action date): August 31, 2017		

Issues/Recommendations				
AOC(s) without Issues/Recommendations Identified in the Five-Year Review:				
Ramsdell Quarry Landfill, Winklepeck Burning Grounds, and Load Line 12				
Issues and Recommendations Identified in the Five-Year Review:				
AOC(s): Load Lines 1 -4	Issue Category: New information at Load Lines 1 - 4 that calls into question the protectiveness of the remedy			
	Issue: Contaminated soils and dry sediment are present above site cleanup goals at Load Lines 1 - 4 and may be accessible to installation personnel during future military training activities			
	Recommendation: Determine if unacceptable risk associated with remaining contaminated soils at Load Lines 1 - 4 exists and remediate in a manner consistent with the Interim ROD, if necessary to mitigate risk.			
Affect Current Protectiveness	Affect Future Protectiveness	Implementing Party	Oversight Party	Milestone Date
No	Yes	Federal Facility	State	September 2017
Protectiveness Statement(s)				
AOC: Load Lines 1 - 4	Protectiveness Determination: Short-term Protective		Addendum Due Date (if applicable): Not Applicable	
AOC: Load Line 12	Protectiveness Determination: Protective		Addendum Due Date (if applicable): Not Applicable	
AOCs: Winklepeck Burning Grounds	Protectiveness Determination: Protective		Addendum Due Date (if applicable): Not Applicable	
AOC: Ramsdell Quarry Landfill	Protectiveness Determination: Protective		Addendum Due Date (if applicable): Not Applicable	
Protectiveness Statement:				
The remedy at Load Lines 1 - 4 currently protects human health and the environment because:				
• Contaminated soil/dry sediment identified in the Interim ROD was remediated				
However, in order for the remedy to be protective in the long-term, the following action needs to be taken to ensure protectiveness:				

- Determine if unacceptable risk associated with remaining contaminated soils at Load Lines 1 - 4 exists and remediate in a manner consistent with the Interim ROD, if necessary to mitigate risk

The remedy at Load Line 12 is protective of human health and the environment because:

- Contaminated soil/dry sediment identified in the ROD was remediated
- The site is not being used and access is restricted by a perimeter fence with warning signs

The remedy at Winklepeck Burning Grounds is protective of human health and the environment because:

- Contaminated soil identified in the ROD was remediated
- LUCs have been implemented; they are being employed and maintained in accordance with the ROD

The remedy at Ramsdell Quarry Landfill is protective of human health and the environment because:

- Contaminated soil identified in the ROD was partially remediated
- A perimeter fence with warning signs was installed and surficial ACM was removed by non-intrusive/no-digging methods in accordance with the ROD amendment
- LUCs have been implemented; training, access restrictions, and land uses are being performed/maintained consistent with the ROD

1.0 INTRODUCTION

This review was conducted to determine whether previous remedial actions at seven areas of concern (AOCs) on Camp Ravenna are and will continue to be protective of human health and the environment. The methods, findings, and conclusions of the review are documented in this report. Also identified are issues found during the review and recommendations to address them.

The U.S. Army prepared this five-year review pursuant to the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) §121 and the National Oil and Hazardous Substances Pollution Contingency Plan (NCP). CERCLA §121 states:

If the President selects a remedial action that results in any hazardous substances, pollutants, or contaminants remaining at the site, the President shall review such remedial action no less often than each five years after the initiation of such remedial action to assure that human health and the environment are being protected by the remedial action being implemented. In addition, if upon such review it is the judgment of the President that action is appropriate at such site in accordance with section [104] or [106], the President shall take or require such action. The President shall report to Congress a list of facilities for which such review is required, the results of all such reviews, and any actions taken as a result of such reviews.

The U.S. Environmental Protection Agency (USEPA) interpreted this requirement further in the NCP; 40 CFR §300.430(f)(4)(ii) states:

If a remedial action is selected that results in hazardous substances, pollutants, or contaminants remaining at the site above levels that allow for unlimited use and unrestricted exposure, the lead agency shall review such action no less often than every five years after the initiation of the selected remedial action.

There are currently 84 AOCs at Camp Ravenna that are being investigated and/or remediated under the U.S. Army's Installation Restoration Program (IRP) and the Military Munitions Response Program (MMRP) (refer to Table 1). Management of these sites follows the *Director's Final Findings and Orders*, which was signed by the U.S. Army and Ohio Environmental Protection Agency (Ohio EPA) in June 2004. These orders were entered into by the U.S. Army pursuant to authority vested in the Secretary of the Army by CERCLA, 42 U.S.C. Section 9601, et seq.; the Defense Environmental Restoration Program (DERP), 10 U.S.C. Section 2701, et seq.; and the NCP, 40 C.F.R. Part 300. Camp Ravenna is not on the National Priorities List (NPL).

This five-year review addresses remedial actions at the following sites:

- Load Lines 1 – 4
- Load Line 12
- Winklepeck Burning Grounds
- Ramsdell Quarry Landfill

The U.S. Army conducted the review of remedial actions implemented at these sites from May 21, 2016 to August 31, 2017. This is the second five-year review for these sites, which was triggered by completion of the first five-year review on August 31, 2012. Review is required

421 because the remedies do not allow unlimited use/unrestricted exposure (UU/UE) after the
422 cleanup actions were completed and the cleanup goals met.

[This page intentionally left blank]

Table 1 - Summary of Camp Ravenna Environmental Restoration Program Sites

AOC	Site	CERCLA Phase Completed	Affected Media	COCs/COPCs	Status	Evaluated in FYR? (Y/N)
Compliance Restoration Sites						
CC-RVAAP-68	Electric Substations (E, W, No. 3)	SI	None	None	RI and PP ongoing, draft PP recommends NFA	N
CC-RVAAP-69	Building 1048 – Fire Station	SI	Soil	VOCs	RI ongoing	N
CC-RVAAP-70	East Classification Yard	PA	Soil and dry sediment	Explosives, herbicides, metals, PAHs, PCBs, pesticides, SVOCs, and VOCs	SI ongoing	N
CC-RVAAP-71	Barn No. 5 Petroleum Release	SI	None	None	SI report recommended NFA, Ohio EPA issued approval letter on February 19, 2015	N
CC-RVAAP-72	Facility-Wide USTs	SI	None	None	SI report recommended NFA, Ohio EPA issued approval letter on July 14, 2015	N
CC-RVAAP-73	Facility-Wide Coal Storage	SI	None	None	RI ongoing, draft report recommends NFA	N
CC-RVAAP-74	Building 1034 Motor Pool Hydraulic Lift	SI	None	None	RI ongoing, draft report recommends NFA	N
CC-RVAAP-75	George Road STP Mercury Spill	SI	None	None	SI report recommended NFA	N
CC-RVAAP-76	Depot Area	SI	Soil	PAHs	RI/FS ongoing	N
CC-RVAAP-77	Building 1037 Laundry Wastewater Sump	SI	None	None	SI report recommended NFA, Ohio EPA issued approval letter on February 19, 2015	N
CC-RVAAP-78	Quarry Pond Surface Dump	PA	Soil	ACM, explosives, herbicides, metals, PAHs, PCBs, pesticides, propellants, and SVOCs	SI ongoing, draft report recommends proceeding to RI phase	N
CC-RVAAP-79	DLA Ore Storage Sites	SI	Soil	Metals	SI ongoing, preliminary draft reports recommend: <ul style="list-style-type: none"> Proceeding to RI phase for the Main Storage Area NFA for remaining ore sites 	N
CC-RVAAP-80	Group 2 Propellant Can Tops	PA	None	None	SI ongoing, preliminary draft report indicates no evidence of a release of propellants and/or other munitions constituents	N
CC-RVAAP-83	Former Buildings 1031 and 1039	SI	None	None	SI report recommended NFA, Ohio EPA issued approval letter on July 29, 2015	N
Installation Restoration Program Sites						
RVAAP-01	Ramsdell Quarry Landfill	RA(C)	Soil and dry sediment	PAHs and ACM	Remedial actions complete, maintenance and monitoring ongoing	Y
RVAAP-02	Erie Burning Grounds	ROD	None	None	NFA ROD signed by Ohio EPA in January 2008	N

Table 1 - Summary of Camp Ravenna Environmental Restoration Program Sites

AOC	Site	CERCLA Phase Completed	Affected Media	COCs/COPCs	Status	Evaluated in FYR? (Y/N)
RVAAP-03	Open Demolition Area #1	RI/FS	Soil and dry sediment	Explosives and PAHs	RI and PP ongoing	N
RVAAP-04	Open Demolition Area #2	ROD	None	None	NFA ROD signed by Ohio EPA in January 2008	N
RVAAP-05	Winklepeck Burning Grounds	RA(C), ROD ESD	Soil and dry sediment	Explosives and PAHs	Remedial action conducted 2008 – 2009; RD for post ROD changes ongoing.	Y
RVAAP-06	C Block Quarry	SI	Soil	Total and hexavalent chromium, ACM	RI/FS ongoing	N
RVAAP-07	Building 1601 Hazardous Waste Storage	NA	None	None	Closed under RCRA; Ohio EPA closure approval letter dated February 12, 1998	N
RVAAP-08	Load Line 1	RA(C)	Soil and dry sediment	Metals, explosives, PCBs, and PAHs	Remedial action conducted in 2007; RI/FS ongoing to further characterize the site for unrestricted or industrial use	Y
RVAAP-09	Load Line 2	RA(C)	Soil and dry sediment	Metals, explosives, PCBs, and PAHs	Remedial action conducted in 2007; RI/FS ongoing to further characterize the site for unrestricted or industrial use	Y
RVAAP-10	Load Line 3	RA(C)	Soil and dry sediment	Metals, explosives, PCBs, and PAHs	Remedial action conducted in 2007; RI/FS ongoing to further characterize the site for unrestricted or industrial use	Y
RVAAP-11	Load Line 4	RA(C)	Soil and dry sediment	Metals, explosives, PCBs, and PAHs	Remedial action conducted in 2007; RI/FS ongoing to further characterize the site for unrestricted or industrial use	Y
RVAAP-12	Load Line 12	RA(C)	Soil and sediment	Metals (arsenic)	Remedial action conducted in 2010; RI/FS ongoing to further characterize the site for unrestricted or industrial use	Y
RVAAP-13	Building 1200	RA(C)	Soil	Metals (manganese)	Remedial action conducted 2014 – 2015; UU/UE attained	N
RVAAP-14	Load Line 6 Evaporation Unit	None	None	None	Ohio EPA closure approval letter dated January 20, 1993	N
RVAAP-15	Load Line 6 Treatment Plant	None	See status column	See status column	Not eligible for ER,A funding	N
RVAAP-16	Fuze & Booster Quarry Landfill/Pond	None	None	None	NFA ROD signed by Ohio EPA in January 2008	N
RVAAP-17	Deactivation Furnace	NA	None	None	Closed under RCRA; soil and groundwater are covered under RVAAP-05 (Winklepeck Burning Grounds)	N
RVAAP-18	Load Line 12 Waste Water Treatment Plant	None	None	None	NFA date March 1997	N
RVAAP-19	Landfill North of Winklepeck Burning Grounds	SI	None	None	Draft RI/FS recommends removing surface debris to ensure integrity of the landfill	N
RVAAP-20	Sand Creek Sewage Treatment Plant	None	None	None	NFA date June 1989	N
RVAAP-21	Depot Sewage Treatment Plant	None	None	None	NFA date June 1989	N
RVAAP-22	George Road Sewage Treatment Plant	None	See status column	See status column	Activities for this site are carried under CC-RVAAP-75	N

Table 1 - Summary of Camp Ravenna Environmental Restoration Program Sites

AOC	Site	CERCLA Phase Completed	Affected Media	COCs/COPCs	Status	Evaluated in FYR? (Y/N)
RVAAP-23	Unit Training Equipment Site UST	None	None	None	Ohio EPA issued a closure approval letter on February 5, 2003	N
RVAAP-24	Waste Oil Tank	None	See status column	See status column	Activities for this site are carried under CC-RVAAP-75	N
RVAAP-25	Building 1034 Motor Pool AST	None	See status column	See status column	Not eligible for ER,A funding	N
RVAAP-26	Fuze Booster Area Settling Tanks	None	See status column	See status column	15 tanks total, located in Load Line 5 (1 tank), Load Line7 (1 tank that was removed in 1988), Load Line 10 (1 AST & 8 USTs), Load Line 11 (3 tanks); all were emptied and cleaned. Soils are being investigated under RVAAP-39, -40, -42, -43, & -44.	N
RVAAP-27	Building 854 PCB Storage	None	None	None	Ohio EPA issued a NFA approval letter on September1, 1999	N
RVAAP-28	Mustard Agent Burial Site	SI	None	None	EE/CA ongoing, draft report recommends no action.	N
RVAAP-29	Upper and Lower Cobbs Ponds	SI	Soil, sediment, surface water	Hexavalent chromium, metals, and PAHs	RI/FS ongoing, draft report recommends LUCs	N
RVAAP-30	Load Line 7 Pink Waste Water Treatment Plant	None	None	None	NFA date January 2000	N
RVAAP-31	Ore Pile Retention Pond	None	None	None	NFA date January 2000	N
RVAAP-32	40 MM Firing Range	None	None	None	Any concerns are being addressed under the MMRP	N
RVAAP-33	Load Line 6 Fuze and Booster	SI	None	None	RI ongoing, draft report recommends NFA	N
RVAAP-34	Sand Creek Disposal Road Landfill	SI	Soil	Metals and PAHs	RI/FS and PP ongoing; draft PP recommends excavation of contaminated soils, off-site disposal, and LUCs	N
RVAAP-35	Building 1037 Laundry Waste Water Sump	None	See status column	See status column	Activities for this site are carried under CC-RVAAP-77	N
RVAAP-36	Pistol Range	None	See status column	See status column	Active range being used by OHARNG. Ohio EPA letter dated February 14, 2006 approved the delay of any environmental restoration until the range is no longer being used.	N
RVAAP-37	Pesticide Building S-4452	None	None	None	Ohio EPA issued a closure approval letter on September 19, 2000	N
RVAAP-38	NACA Test Area	SI	Soil	Metals (lead) and PAHs	RI/FS ongoing; draft report recommends excavation of contaminated soil and LUCs	N
RVAAP-39	Load Line 5	SI	None	None	RI ongoing, draft report recommends NFA	N
RVAAP-40	Load Line 7	SI	Soil	PAHs	RI/FS ongoing, draft report recommends <i>ex-situ</i> thermal treatment of contaminated soils	N
RVAAP-41	Load Line 8	SI	None	None	RI ongoing, draft report recommends NFA	N

Table 1 - Summary of Camp Ravenna Environmental Restoration Program Sites

AOC	Site	CERCLA Phase Completed	Affected Media	COCs/COPCs	Status	Evaluated in FYR? (Y/N)
RVAAP-42	Load Line 9	SI	Soil	Metals, PAHs	RI/FS ongoing, draft report recommends excavation and off-site disposal and <i>ex-situ</i> thermal treatment of contaminated soil	N
RVAAP-43	Load Line 10	RI	None	None	PP ongoing, draft report recommends NFA	N
RVAAP-44	Load Line 11	SI	None	None	RI ongoing, draft report recommends NFA	N
RVAAP-45	Wet Storage Area	SI	None	None	RI ongoing, draft report recommends NFA	N
RVAAP-46	Building F-15 and F-16	SI	None	None	RI ongoing, draft report recommends NFA	N
RVAAP-47	Building T-5301	IRA	None	None	IRA conducted in 2000, no contamination left in place	N
RVAAP-48	Anchor Test Area	RA(C)	Soil	Metals (arsenic)	RA completed in 2014, UU/UE attained	N
RVAAP-49	Central Burn Pits	ROD	None	None	NFA ROD signed by Ohio EPA in January 2008	N
RVAAP-50	Atlas Scrap Yard	RI	Soil	PAHs	FS and pilot study for soil treatment ongoing	N
RVAAP-51	Dump Along Paris Windham Road	RI/FS	Soil	PAHs	PP ongoing, draft document recommends LUCs	N
RVAAP-66	Facility-Wide Groundwater	SI	Groundwater	Explosives, metals, PAHs, SVOCs, and VOCs	RI/FS ongoing	N
RVAAP-67	Facility-Wide Sewers	SI	Sediment	Metals	RI/FS ongoing, draft report recommends removal of underground sewer pipes and related structures and contaminated sediment	N
Military Munitions Response Program Sites						
RVAAP-001-R-01	Ramsdell Quarry Landfill MRS	RI	NA	MEC or MPPEH	RI report recommends FS	N
RVAAP-002-R-01	Erie Burning Grounds MRS	RI	NA	MEC or MPPEH	RI report recommends FS	N
RVAAP-004-R-01	Open Demolition Area #2 MRS	RI	NA	MEC or MPPEH	TCRA proposed to clear MEC and implement site improvement activities	N
RVAAP-005-R-01	Winklepeck Burning Grounds	None	See status column	See status column	Operational range, ineligible for ER,A funding	N
RVAAP-008-R-01	Load Line 1 MRS	ROD	None	None	NFA ROD issued August 14, 2015, Ohio EPA concurrence letter issued September 21, 2015	N
RVAAP-012-R-01	Load Line 12 MRS	SI	None	None	SI report recommends NFA	N
RVAAP-016-R-01	Fuze and Booster Quarry MRS	RI	NA	MEC or MPPEH	RI report recommends FS	N

Table 1 - Summary of Camp Ravenna Environmental Restoration Program Sites

AOC	Site	CERCLA Phase Completed	Affected Media	COCs/COPCs	Status	Evaluated in FYR? (Y/N)
RVAAP-019-R-01	Landfill north of Winklepeck MRS	RI	None	None	RI recommends NFA	N
RVAAP-032-R-01	40mm Firing Range MRS	RI	NA	MEC or MPPEH	RI report recommends FS	N
RVAAP-033-R-01	Firestone Test Facility MRS	ROD	None	None	NFA ROD issued August 14, 2015, Ohio EPA concurrence letter issued July 27, 2015	N
RVAAP-034-R-01	Sand Creek Dump MRS	ROD	None	None	NFA ROD issued August 14, 2015, Ohio EPA concurrence letter issued September 21, 2015	N
RVAAP-046-R-01	Building F-15 and F-16	SI	None	None	SI report recommends NFA	N
RVAAP-048-R-01	Anchor Test Area	SI	None	None	SI report recommends NFA	N
RVAAP-050-R-01	Atlas Scrap Yard MRS	RI	None	None	RI report recommends NFA	N
RVAAP-060-R-01	Block D Igloo MRS	RI	NA	MEC or MPPEH	RI report recommends FS	N
RVAAP-061-R-01	Block D Igloo – TD MRS	SI	NA	MEC or MPPEH	RI/FS ongoing	N
RVAAP-062-R-01	Water Works #4 Dump MRS	ROD	None	None	NFA ROD issued September 29, 2015, Ohio EPA concurrence letter issued December 3, 2015	N
RVAAP-063-R-01	Group 8 MRS	RI	NA	MEC or MPPEH	RI report recommends FS	N
RVAAP-064-R-01	Old Hay Field MRS	None	See status column	See status column	Operational range, ineligible for ER,A funding	N

Notes:

- ACM asbestos-containing material
- AOC area of concern
- AST above ground storage tank
- CERCLA Comprehensive Environmental Response, Compensation and Liability Act of 1980
- COC constituent of concern
- COPC constituent of potential concern
- EE/CA engineering evaluation/cost analysis
- ER,A Environmental Restoration, Army
- ESD explanation of significant differences
- FS feasibility study

FYR	five-year review
IRA	interim remedial action
LUCs	land use controls
MEC	munitions and explosives of concern
MMRP	Military Munitions Response Program
MPPEH	material potentially presenting an explosive hazard
MRS	Munitions Response Site
NA	not applicable
NFA	no further action
OHARNG	Ohio Army National Guard
PA	preliminary assessment
PAH	polycyclic aromatic hydrocarbon
PCB	polychlorinated biphenyl
PP	proposed plan
RA(C)	remedial action (construction)
RI	remedial investigation
ROD	record of decision
RVAAP	Ravenna Army Ammunition Plant
SI	site inspection
SVOC	semi-volatile organic compound
TCRA	time-critical removal action
UST	underground storage tank
UU/UE	unlimited use/unrestricted exposure
VOC	volatile organic compound

423 **2.0 SITE CHRONOLOGY**

424 The following table lists the dates of important events for Camp Ravenna and the sites evaluated
425 in this five-year review.

Table 2 Chronology of Site Events

Event	Date
<i>Facility-Wide</i>	
U.S. Government purchased approximately 25,000 acres in the northeastern part of Ohio in Portage and Trumbull counties and started the construction of facilities for loading, assembling, and packaging of large caliber ammunition and for depot storage	August 1940
The Atlas Powder Company operated the RVAAP for the Ordnance Department	September 1940
RVAAP was placed on standby status	1945
RVAAP was reactivated during the Korean War	April 1951
All production activities ended	August 1957
RVAAP was placed in a standby condition	October 1957
Three load lines and two component lines were reactivated to produce munitions for the Vietnam War	May 1968
The active load lines and component lines were deactivated and demilitarization of munitions continued on a periodic basis	August 1972
RVAAP received a Resource Conservation and Recovery Act (RCRA) Part A permit for the storage and treatment of off-specification munitions and munitions-related waste	1980
Munitions demilitarization activities were discontinued	1992
RVAAP submitted a RCRA Part B permit application for an open burning/open detonation grounds and a hazardous waste storage building. The application was withdrawn because it was determined that there was no longer a need for active demolition work.	1992
Operations and Support Command transferred control and operation of 16,164 acres to the National Guard Bureau (NGB)	May 1999
An agreement was signed to transfer an additional 3,774 uncontaminated acres to the NGB with the remaining acreage to be transferred as restoration of sites is completed	March 2002
The U.S. Army and Ohio EPA sign the <i>Director's Final Findings and Orders</i> to authorize groundwater monitoring at Ramsdell Quarry Landfill and to authorize activities at other RVAAP sites	June 2004

Table 2 Chronology of Site Events

Event	Date
Multiple property transfers to the NGB for use by OHARNG	1999 - 2013
<i>Load Line 1</i>	
Melt and load activities (Trinitrotoluene [TNT] and Composition B) conducted	1941 - 1945, and 1951 - 1957
Soils contaminated with explosives and waste water lines were removed and replaced	1951
Munitions rehabilitation activities (dismantling, replacing components, and repainting of mines) conducted	1961 – 1967
Preliminary site assessment completed	February 1996
Phase I RI performed	1996
Salvage and demolition activities performed, which included the removal of friable asbestos shielding, transite siding, roofing, steel piping, trim, overhead lighting (with PCB ballasts), and structural steel	1996 - 2000
Site buildings demolished	1999 and 2007
Technical Memorandum for Human Health and Ecological Risk Assessment Approach issued	August 2002
Phase II RI performed	2003
Supplemental Baseline Human Health Risk Assessment for Load Line 1 Alternative Receptors issued	July 2004
Focused FS completed	May 2005
Proposed Plan for Remediation of Soil and Dry Sediment at Load Lines 1-4 issued	July 2005
Final Interim ROD for the Remediation of Soils at Load Lines 1-4 issued	January 2007
Remedial action work plan completed	April 2007
Soil and dry sediment remedial action performed	August – November 2007
Letter issued from U.S. Army Base Realignment and Closure Division (BRACD) to Ohio EPA describing additional removal actions beneath the floor slabs	January 2008
Building floor slabs removed	May 2009
Surface and subsurface soil sampling performed at former building slab areas	October - November 2009
Sampling and characterization of surface soils around former building slabs performed	December 2009

Table 2 Chronology of Site Events

Event	Date
Sampling and characterization of deeper soils beneath the former building slabs performed	August - September 2010
Sub slab soil remedial action performed	September 2010
Comprehensive data gap sampling of subsurface soil below former building floor slabs and surface soil adjacent to former buildings performed to guide future remedial and administrative measures at the site	June - July 2011
Final characterization sampling report issued	March 2013
<i>Load Line 2</i>	
Melt and load activities (TNT and Composition B) and demilitarization activities conducted	1941 - 1945, 1951 - 1957, and 1969-1971
Preliminary site assessment completed	February 1996
Phase I RI performed	1996
Site buildings demolished	1999 and 2007
Phase II RI performed	2004
Focused FS completed	May 2005
Proposed Plan for Remediation of Soil and Dry Sediment at Load Lines 1-4 issued	July 2005
Final Interim ROD for the Remediation of Soils at Load Lines 1-4 issued	January 2007
Remedial action work plan completed	April 2007
Soil and dry sediment RA performed	August – November 2007
Letter issued from BRACD to Ohio EPA describing additional removal actions beneath the floor slabs	January 2008
Building floor slabs removed	March - June 2008
Surface and subsurface soil sampling performed at former building slab areas	March - October 2008
Sampling and characterization of surface soils around former building slabs performed	December 2009
Sub slab soil remedial action performed	June 2010
Sampling and characterization of deeper soils beneath the former building slabs performed	August - September 2010

Table 2 Chronology of Site Events

Event	Date
Comprehensive data gap sampling of subsurface soil below former building floor slabs and surface soil adjacent to former buildings performed to guide future remedial and administrative measures at the site	June - July 2011
Final characterization sampling report issued	March 2013
<i>Load Line 3</i>	
Melt and load activities (Composition B) and demilitarization activities conducted	1941 - 1945, 1951 - 1957, and 1969 - 1971
Site buildings demolished	1999 and 2007
Preliminary site assessment completed	February 1996
Phase I RI performed	1996
Phase II RI performed	2004
Focused FS completed	May 2005
Proposed Plan for the Remediation of Soil and Dry Sediment at Load Lines 1-4 issued	July 2005
Final Interim ROD for the Remediation of Soils at Load Lines 1-4 issued	January 2007
Remedial action work plan completed	April 2007
Soil and dry sediment remedial action performed	August – November 2007
Letter issued from BRACD to Ohio EPA describing additional removal actions beneath the floor slabs	January 2008
Building floor slabs removed	March - June 2008
Surface and subsurface soil sampling performed at former building slab areas	March-October 2008 and October - November 2009
Sampling and characterization of surface soils around former building slabs performed	December 2009
Sub slab soil remedial action performed	June 2010
Sampling and characterization of deeper soils beneath the former building slabs performed	August - September 2010

Table 2 Chronology of Site Events

Event	Date
Comprehensive data gap sampling of subsurface soil below former building floor slabs and surface soil adjacent to former buildings performed to guide future remedial and administrative measures at the site	June - July 2011
Final characterization sampling report issued	March 2013
<i>Load Line 4</i>	
Melt and load activities (TNT) conducted	1941 - 1945, and 1951 - 1957
Site buildings demolished	1999 and 2007
Preliminary site assessment completed	February 1996
Phase I RI performed	1996
Phase II RI performed	2004
Focused FS completed	May 2005
Proposed Plan for the Remediation of Soil and Dry Sediment at Load Lines 1-4 issued	July 2005
Final Interim ROD for the Remediation of Soils at Load Lines 1-4 issued	January 2007
Remedial action work plan completed	April 2007
Soil and dry sediment remedial action performed	August – November 2007
Letter issued from BRACD to Ohio EPA describing additional removal actions beneath the floor slabs	January 2008
Building floor slabs removed	March - June 2008
Surface and subsurface soil sampling performed at former building slab areas	March - October 2008 and October - November 2009
Sampling and characterization of surface soils around former building slabs performed	December 2009
Excavated soil stockpile restoration activities performed	June 2010
Sampling and characterization of deeper soils beneath the former building slabs performed	August - September 2010
Comprehensive data gap sampling of subsurface soil below former building floor slabs and surface soil adjacent to former buildings performed to guide future remedial and administrative measures at the site	June - July 2011

Table 2 Chronology of Site Events

Event	Date
Final characterization sampling report issued	March 2013
<i>Load Line 12</i>	
Ammonium nitrate production operations conducted	November 1941 - May 1943
Buildings 900, 904, and 905 were converted for the demilitarization of munitions	June 1944
An ammonium nitrate line was operated by the Silas Mason Company for the production of ammonium nitrate fertilizer	1946 - 1950
A private contractor leased building FF-19 to produce aluminum chloride	1965 - 1967
Load Line 12 was used to melt-out and recover explosives from bombs	January 1961 - July 1961
Site buildings demolished	1973 - 1975, 1980, and 1998 - 2000
A pink water treatment plant was built to treat effluent prior to discharge	1981
Preliminary site assessment completed	February 1996
Phase I RI performed	1996
A relative risk site evaluation was performed by the U.S. Army Center for Health Promotion and Preventative Medicine	1996
Approximately 1,500 cubic feet of soil removed from four pits near Building 904	1999
Additional sampling performed by the U.S. Army Corps of Engineers (USACE)	August 2001
Phase II RI performed	2000
Preliminary draft characterization report issued	2005
Supplemental phase II RI performed	2004 - 2005
FS completed	July 2006
Proposed Plan for Soil and Dry Sediment issued	March 2007
ROD for Soil and Dry Sediment Remediation issued	March 2009
Remedial design completed	October 2009
Soil and dry sediment remedial action performed	June 2010
Surface soil samples collected to guide future remedial and administrative measures at the site	June - July 2011

Table 2 Chronology of Site Events

Event	Date
Final characterization sampling report issued	March 2013
<i>Winklepeck Burning Grounds</i>	
Open burning of explosives from artillery projectiles conducted in four burn pits, on burn pads, and sometimes on roads	Prior to 1980
Thermal treatment of munitions and explosives conducted in a 1-acre RCRA area at former burn pad 37 using metal, refractory-lined trays set on top of crushed slag	After 1980
Hazardous waste management study conducted by the U.S. Army Environmental Health Administration (USAEHA) issued	1983
Soils, groundwater, and surface water characterization report issued by USAEHA	1992
Preliminary site assessment completed	February 1996
Phase I RI performed	1996
Soil sample analysis performed	1997
RCRA field investigation report issued	1998
Phase II RI performed	1998
Biological field truthing effort report issued	March 2003
MEC density survey performed	2004
MEC cleanup performed in various portions of the site	2004 - 2005 and 2008 - 2009
Deactivation furnace soils transferred from RCRA to CERCLA under <i>Director's Final Findings and Orders</i>	June 2004
Phase III RI report issued	March 2005
Focused FS issued	March 2005
Removal action conducted, which included soil contaminated with MEC, chemicals, and asbestos-containing material (ACM)	March - August 2005
Proposed plan for soil and dry sediment issued	October 2005
U.S. Army transferred approximately 180 acres to the NGB for the construction of a Mark 19 Grenade Machine Gun range	2006
Construction of Mark 19 Machine Gun range completed	December 2006
Remedial action work plan issued	July 2008
ROD for soil and dry sediment remediation issued	August 2008

Table 2 Chronology of Site Events

Event	Date
Contract awarded for data quality objectives (DQO) study for MEC and chemical contaminants	September 2005
Soil and dry sediment remedial action for burning pads 61/61A, 67, and 70 performed	September 2008 - May 2009
Remedial action completion report issued	November 19, 2009
DQO Report issued	June 2011
Final Property Management Plan (PMP) issued (identifies LUCs for Winklepeck Burning Grounds)	August 2012
Explanation of significant differences (ESD) for post-ROD changes to the remedy issued	March 2015
Remedial design for post-ROD changes to the remedy issued	August 27, 2015
<i>Ramsdell Quarry Landfill</i>	
Quarry operations discontinued	1941
Quarry used for landfilling of non-hazardous solid waste	1941 - 1989
Bottom of the landfill used to burn waste explosives from Load Line 1	1946 - 1950
A portion of the quarry was permitted as a sanitary landfill by the state of Ohio	1978
Landfilling operations ceased	September 1989
Landfill closed under state of Ohio solid waste regulations	May 1990
Initial phase groundwater investigation performed	July 1998
Follow-on phase groundwater investigation performed	July 1999
Phase I RI performed	October 2003 - January 2004
The U.S. Army and Ohio EPA sign the <i>Director's Final Findings and Orders</i> to authorize groundwater monitoring at Ramsdell Quarry Landfill to be performed under a facility-wide groundwater monitoring program	June 2004
FS issued	October 2006
Proposed plan for soil and dry sediment issued	March 2007
ROD for soil and dry sediment issued	March 2009
20 acres of the site that contained four burn pads with soil and dry sediment contamination transferred to the Army National Guard	June 2010
Revised final remedial design issued	June 2010

Table 2 Chronology of Site Events

Event	Date
Soil and dry sediment remedial activities started (not completed due to presence of ACM)	July 2010
Engineering evaluation for soil and dry sediment issued	September 2011
Modified proposed plan for soil and dry sediment issued	October 2012
ROD amendment for soil and dry sediment issued	May 2013
Remedial design for soil and dry sediment issued	April 2014
ROD amendment remedial action performed	August - November 2014
Remedial action report for soil and dry sediment issued	January 2015
LUCs established	December 2014

3.0 BACKGROUND

RVAAP was constructed in 1940 and 1941 for ammunition assembly/loading and depot storage. It was placed on standby status in 1950. Production activities resumed from 1954 to 1957 and 1968 to 1972. Demilitarization activities, including disassembly of munitions and explosives melt-out and recovery, continued until 1992.

Prior to 2002, RVAAP was a 21,419-acre installation. In 2003 the property boundary was resurveyed and found to be 21,683 acres. As of September 2013, administrative accountability for the facility entire acreage has been transferred to the U.S. Property and Fiscal Officer for Ohio and subsequently licensed to the OHARNG for use as a military training site known as Camp Ravenna.

3.1 PHYSICAL CHARACTERISTICS

Camp Ravenna is located in northeastern Ohio within Portage and Trumbull counties, approximately three miles east-northeast of the city of Ravenna and approximately one mile northwest of the city of Newton Falls (Figure 1). The facility is approximately 11 miles long and 3.5 miles wide and is bounded by State Route 5, the Michael J. Kirwan Reservoir, and the CSX System Railroad to the south, Garret, McCormick, and Berry roads to the west, the Norfolk Southern Railroad to the north, and State Route 534 to the east.

3.1.1 Load Line 1

Load Line 1 is situated in the southeastern portion of Camp Ravenna (Figure 2). Physical characteristics of the site are illustrated on Figure 3.

The ground surface is hummocky due to development associated with the load line buildings and infrastructure. Elevations range from approximately 40 to 1,016 feet (ft) above mean sea level (amsl). Outside of the main production area and to the southeast, the ground slopes southeastward. All buildings have been demolished and most of the site is heavily vegetated with grasses, scrub vegetation, and immature hardwoods. The original security fence around the load line and access gates are intact. Unimproved access roads and former railroad beds traverse portions of the site.

3.1.2 Load Line 2

Load Line 2 is situated in the southeastern portion of Camp Ravenna (Figure 2). Physical characteristics of the site are illustrated on Figure 4.

Ground surface elevations range from approximately 990 to 1,010 ft amsl. The land surface generally slopes from the center of the load line in all directions. All buildings have been demolished and most of the site is heavily vegetated with grasses, scrub vegetation, and immature hardwoods. The original security fence around the load line and access gates are intact. Unimproved access roads and former railroad beds traverse portions of the site.

3.1.3 Load Line 3

Load Line 3 is situated in the southeastern portion of Camp Ravenna (Figure 2). Physical characteristics of the site are illustrated on Figure 5.

Ground surface elevations range from approximately 980 to 1,020 ft amsl. The land surface generally slopes from northeast to southwest. All buildings have been demolished and most of

the site is heavily vegetated with grasses, scrub vegetation, and immature hardwoods. The original security fence around the load line and access gates are intact. Unimproved access roads and former railroad beds traverse portions of the site.

3.1.4 Load Line 4

Load Line 4 is situated in the southeastern portion of Camp Ravenna (Figure 2). Physical characteristics of the site are illustrated on Figure 6.

Berms are present around former buildings G-12, G-12A, G-16, G-19, and G-19A. Elsewhere at the site, the ground surface elevations range from approximately 980 to 1,000 ft amsl. The overall topography slopes gently from north to south. Load Line 4 Pond is located in the southern portion of the site.

All buildings have been demolished and most of the site is heavily vegetated with grasses, scrub vegetation, and immature hardwoods. The original security fence around the load line and access gates are intact. Unimproved access roads and former railroad beds traverse portions of the site.

3.1.5 Load Line 12

Load Line 12 is situated in the southeastern portion of Camp Ravenna (Figure 2). Physical characteristics of the site are illustrated on Figure 7.

Elevations across the site range from approximately 970 to 990 ft amsl. The land surface gently slopes from the west and east towards a main ditch. All buildings have been demolished and most of the site is heavily vegetated with grasses, scrub vegetation, and immature hardwoods. The original security fence around the load line and access gates are intact. Unimproved access roads and former railroad beds traverse portions of the site.

3.1.6 Winklepeck Burning Grounds

Winklepeck Burning Grounds is situated in the center of Camp Ravenna (Figure 2). Physical characteristics of the site are illustrated in Figure 8.

The site is an open area with gently undulating topography. Ground surface elevations decrease from west to east and vary from approximately 1,085 to 990 ft amsl. Gravel or dirt roads extend east to west and are tied together with connecting roads at the eastern and western ends of the site. Former burn pads (70 total) were located alongside of the east-west trending roads.

3.1.7 Ramsdell Quarry Landfill

Ramsdell Quarry Landfill is located in the eastern portion of Camp Ravenna. Physical characteristics of the site are illustrated in Figure 9.

The site is a 14-acre parcel with a 4-acre unlined landfill located in an abandoned quarry. The quarry was excavated to the underlying Sharon Sandstone/Conglomerate and the landfill is 30 to 40 ft deep. A pool of water is intermittently present in the bottom of the quarry.

Ground surface elevations range from approximately 955 to 990 ft amsl. Prominent features include the former quarry, the landfill, access roads, and a former rail line. The land surface in a large portion of the site slopes into the former quarry. The quarry bottom is approximately 40 ft below the surrounding area. No surface water outlet exists from the quarry, which causes surface water to accumulate at the quarry bottom.

3.2 GEOLOGY

Geology at Camp Ravenna consists of horizontal to gently dipping sedimentary bedrock that is overlain by unconsolidated glacial deposits consisting of till and outwash. Soils are generally derived from silty clay glacial till. Much of the soil was reworked or removed during construction activities in operational areas. In general, the soils at the load lines are poorly drained and consist of silty clay or clay loam formed over glacial till. Runoff is typically medium to rapid and the soil is seasonally wet. The thickness of the soils ranges from thin to absent in the eastern and northwestern portions of Camp Ravenna to an estimated 150 ft in the central portion (TEC-Weston 2016).

The uppermost bedrock consists of several units of the Pottsville Formation, which varies from coarse, permeable sandstones to impermeable shales (TEC-Weston 2016). The Sharon Sandstone Member is a highly porous, loosely cemented, permeable sandstone that is frequently fractured and weathered. It contains local conglomeratic zones that are referred to as the Sharon Conglomerate. Thin shale lenses also occur in the upper portion of the Sharon Sandstone.

Figures showing surface geology and geologic cross sections are provided in Attachment 10.

3.2.1 Load Line 1

Soil cover is thin to absent in the vicinity of former buildings CB-4, CB-4A, CA-6, CA-6A, and CB-14. Native soil at the load line belongs to the Mahoning silt loam series.

The Sharon Conglomerate is exposed at the ground surface throughout the load line. Its presumed thickness exceeds 40 ft. (Leidos 2016j).

3.2.2 Load Line 2

Poorly drained soils of the Trumbull, Mitiwanga, and Mahoning series are present. Unconsolidated zone characteristics vary widely across the load line due to lateral discontinuities within the glacial till and site disturbances (Leidos 2016j).

The Sharon Conglomerate is the uppermost bedrock unit. It consists of fine to medium grained sandstone with shale lenses.

3.2.3 Load Line 3

Poorly drained soils of the Mitiwanga and Mahoning series are present. Unconsolidated zone characteristics vary widely across the load line due to lateral discontinuities within the glacial till and site disturbances (Leidos 2016j). The Sharon Conglomerate is the uppermost bedrock unit.

3.2.4 Load Line 4

Poorly drained soils of the Mahoning series are present. The Sharon Conglomerate is the uppermost bedrock unit.

3.2.5 Load Line 12

Silty to clayey soil derived from glacial sediments overly shale bedrock, except where disturbed by previous site activities (SAIC 2009b). The Sharon Conglomerate is the uppermost bedrock unit.

3.2.6 Winklepeck Burning Grounds

The site contains low permeability soil and glacial sediments except where the native materials have been eroded, removed, or covered during previous site operations. The dominant soil types are silt loam and clay loam. Glacial sediments vary across the site and overlay shale/sandstone bedrock at 18 to 43 ft below ground surface (bgs).

3.2.7 Ramsdell Quarry Landfill

The landfill is underlain by weathered, fractured, fine- to medium grained sandstone of the Sharon Conglomerate. Overburden is thin or absent across much of the landfill, particularly within the quarry bottom.

3.3 HYDROLOGY

Groundwater at Camp Ravenna is present in the unconsolidated glacial deposits, at the glacial till-bedrock contact, and in the bedrock. The principal water-bearing aquifer is the Sharon Sandstone/Conglomerate. Depending on the existence and depth of overburden, the Sharon ranges from an unconfined to a leaky artesian aquifer. Groundwater in the unconsolidated deposits is limited to sandy lenses in the glacial tills, saturated lake sediments, outwash material, and alluvial deposits. Groundwater within the unconsolidated water-bearing zone and Sharon aquifer predominately flows in an eastward direction with local radial and/or southerly components (TEC-Weston 2016).

The unconsolidated water-bearing zone has numerous local flow variations that are influenced by topography and site drainage patterns. These local variations in flow direction have been interpreted to indicate that groundwater is generally in direct hydraulic communication with surface water and surface water drainage ways may also act as groundwater discharge locations (USACE 2004). Groundwater in the bedrock generally flows from higher areas in the western portion of Camp Ravenna toward stream valleys in the eastern portion that act as discharge areas. Figures showing potentiometric surfaces in the unconsolidated water-bearing zone and sandstone aquifer are provided in Attachment 10.

Outside of Camp Ravenna, domestic water wells and small public water supplies obtain reasonable quantities of water from wells completed in unconsolidated deposits.

3.3.1 Load Lines

3.3.1.1 Load Line 1

The water table surface typically varies from 19 to 35 ft bgs (USACE 2004). Groundwater is present within the unconsolidated water bearing zone, the Upper Sharon Aquifer, and the Lower Sharon Aquifer. Potentiometric surface contours are consistent with topography and exhibit radial flow away from the center of the load line (Attachment 10, Figure 3-1 and Figure 3-3).

Surface water drainage generally flows easterly with northeasterly and southeasterly components in the northern and southern half of the load line, respectively (Leidos 2016j). Runoff from the former main production area flows via ditches and storm sewers to discharge points along the perimeter of the load line.

3.3.1.2 Load Line 2

Groundwater is present in the Upper Sharon and Lower Sharon aquifers. The water table surface varies between 5 to 15 ft bgs and mimics surface topography. Groundwater flows radially in all

directions within the Upper Sharon Aquifer (Attachment 10, Figure 3-3). The general direction of flow within the Lower Sharon Aquifer is northeast (Attachment 10, Figure 3-4).

Intermittent surface water flows to the north and south from the center of the load line. The majority of the surface water flows to the south through a series of manmade ditches that connect on the south end of the load line and ultimately discharges into Kelly's Pond. Surface water also flows north through a smaller network of ditches to ponds at the north end of the load line (Leidos 2016j).

3.3.1.3 Load Line 3

The water table surface typically varies between 10 to 30 ft bgs. Groundwater is present in the Upper Sharon and Lower Sharon aquifers. Within the Upper Sharon Aquifer, the general direction of flow is southwest from a high area centered at the load line (Attachment 10, Figure 3-3). The general direction of flow within the Lower Sharon Aquifer is the northeast (Attachment 10, Figure 3-4).

A series of drainage ditches convey surface water west across the load line to Cobbs Pond.

3.3.1.4 Load Line 4

The water table surface typically varies between 8 to 27ft bgs and mimics topography. Groundwater is present within the unconsolidated water bearing zone, the Upper Sharon Aquifer, and the Lower Sharon Aquifer. It flows west-northwest towards a tributary entering Cobbs Ponds (Leidos 2016j). In the southern portion of the load line, groundwater flows south (refer to Attachment 10, Figure 3-1, Figure 3-3, and Figure 3-4).

Surface water flow into and out of the pond is from the southeast to northwest.

3.3.1.5 Load Line 12

The water table surface at Load Line 12 is typically less than 15 ft bgs (USACE 2004). Groundwater is present within the unconsolidated water bearing zone, the Upper Sharon Aquifer, and the Lower Sharon Aquifer. Groundwater flow within the unconsolidated water bearing zone and the Upper Sharon Aquifer generally mimics the topography and surface water drainage patterns (Attachment 10, Figure 3-1 and Figure 3-3). The general direction of flow within the Lower Sharon Aquifer is northeast (Attachment 10, Figure 3-4).

Surface water drainage generally flows from south to north across the site. A main ditch bisects the central part of the site and flows north. An active channel traverses the site from west to east and intercepts the main ditch near the northern boundary of the site. Drainage ditches within Load Line 12 are primarily dry, except during rain events.

3.3.2 Winklepeck Burning Grounds

The groundwater flow pattern mimics site topography and surface water drainage patterns, it generally flows to the east-southeast (SAIC 2005a).

Surface water drainage generally flows from west to east/southeast across the site and ultimately discharges to Sand Creek. No perennial streams exist within the site.

3.3.3 Ramsdell Quarry Landfill

The water table surface is typically less than 25 ft bgs and groundwater flow is generally from the southwest to northeast.

3.4 LAND AND RESOURCE USE

Camp Ravenna is surrounded by several communities. Windham is to the north; Garrettsville is six miles to the northwest; Newton Falls is one mile to the southeast; Charlestown is immediately southwest; and Wayland is three miles to the south. It is located in a rural area, access by the public is controlled, and it is not near any major industrial or developed areas. The majority of surrounding land is woodland or farm acreage with the remainder residential.

Restricted land use and sound forest management practices within Camp Ravenna have preserved and enabled forest tracts to mature (SAIC 2005a). The Northern Long Eared Bat was listed by the U.S. Fish and Wildlife Service as a federally threatened species in 2015 in Ohio. This species is known to reside at Camp Ravenna. According to the *Updated Integrated Natural Resources Management Plan* (OHARNG 2014), several State-listed threatened and endangered species have been confirmed at Camp Ravenna.

Jurisdictional wetland delineations at Camp Ravenna have surveyed approximately 26 percent (5,680 acres) of the land. Approximately 13 percent (715 acres) of the surveyed area has been delineated as jurisdictional wetlands. The wetland communities consist of submergent marsh, floating-leaved marsh, mixed emergent marsh, cat-tail marsh, sedge-grass marsh, mixed shrub swamp, button bush swamp, oak-maple swamp forest, mixed swamp forest, mixed floodplain forest, wet fields, and red maple woods (OHARNG 2014).

Camp Ravenna is used by OHARNG for military training. Training and related activities include ranges, field operations and bivouac training, convoy training, equipment maintenance, and storage of heavy equipment. The facility is fenced and access is controlled.

Anticipated future land uses for the sites are identified below.

- Load Lines 1 - 4 and 12; military training (vehicle maneuver area)
- Winklepeck Burning Grounds; small arms range (Mark 19 Grenade Machine Gun and Multi-Purpose Machine Gun)
- Ramsdell Quarry Landfill; closed landfill, restricted access

3.5 HISTORY OF CONTAMINATION

3.5.1 Load Lines 1 Through 4

Load Lines 1 - 4 were used to melt and load TNT, Composition B (a mixture of TNT and RDX [1,3,5-trinitroperhydro-1,3,5-triazine], and HMX [octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine]) into large-caliber shells. The load lines also were used for munitions rehabilitation activities (production and reconditioning of anti-tank mines) and the demilitarization of projectiles. Previous industrial operations conducted at these sites are summarized below.

- Handling and screening of bulk TNT, RDX, and HMX
- Melting and loading TNT, Composition B, and HMX explosives into large-caliber shells
- Painting, drilling and boosting shells
- Munitions rehabilitation activities (dismantling, replacing components, and repainting mines)
- Quality assurance/quality control (QA/QC) using x-ray units
- Truck and equipment maintenance
- Paint, oil, solvent, and equipment storage

- Ancillary facilities for heating, ventilation, and air conditioning (HVAC), steam plant and power house, waste water treatment, elevator machine house, shipping, cafeteria, and worker change houses

The operations produced explosive dust, spills, and vapors that collected on the floors and walls of each building. Periodically, the floors and walls were cleaned with water and steam. The liquid, containing TNT and Composition B, was known as “pink water” for its characteristic color. Soil and dry sediment became contaminated as a result of these operations.

3.5.2 Load Line 12

Load Line 12 was originally known as the Ammonium Nitrate Plant. Operations started on November 25, 1941. Structures related to the production of ammonium nitrate included a Neutral Liquor Building (Building FF-19) and seven evaporation/crystallization units (Buildings 900, 901, 902, 903, 904, 905, and 906). From 1949 to 1993, munitions were periodically demilitarized at the site. Building wash-down water and wastewater from bomb melt-out operations, performed intermittently following the end of ammonium nitrate production, was collected in a house gutter system and flowed through a piping system into two stainless steel tanks. The first tank was used for settling and the second tank was used for filtration. Prior to 1980, the water leaked under the building and ponded there. Wash-down water from Building F-904 was also swept out through doorways onto the ground surrounding the building. Other structures included Water Works No. 2 and Power House No. 3 (Building FE-17), which housed support operations. A drainage ditch (main ditch) approximately bisects the site.

3.5.3 Winklepeck Burning Grounds

Winklepeck Burning Grounds is approximately 200 acres and was operated from 1948 to 1998. Prior to 1980, open burning activities were performed in unlined pits, pads, and sometimes on roads and ditch lines within the area. Materials that were burned included TNT, RDX, Composition B, antimony sulfide, lead azide, propellants, black powder, waste oils, sludge from the load lines, domestic wastes, hospital waste, explosives-contaminated waste, and small amounts of laboratory chemicals. The resulting ash was abandoned in-place. Munitions, munitions debris (primarily scrap metal), and explosive constituents were present at the site. From 1980 to 1989, burning of scrap explosives, propellants, and explosives-contaminated materials was conducted within raised refractory-lined trays located within a 1.5-acre area.

3.5.4 Ramsdell Quarry Landfill

The landfill was used from 1941 to 1989. From 1946 to 1950 the site also was used as a land-surface burning site to thermally destroy waste explosives from Load Line 1 and napalm bombs. From 1976 to 1989 a portion of the site was used as a nonhazardous solid domestic waste landfill. The landfill ceased operations in September 1989 and was closed in May 1990 in accordance with State of Ohio solid waste regulations. The landfill has been capped and covers approximately four acres. The four-acre closed landfill is regulated under RCRA while the remaining bottom portion of the quarry is regulated under CERCLA.

3.6 INITIAL RESPONSE

3.6.1 Load Lines 1 Through 4

In 1951, soil contaminated with explosives was removed from Load Line 1 and replaced with clean fill. Building demolition and salvage activities occurred in 1999 and 2007.

3.6.2 Load Line 12

Site buildings were demolished in 1973 to 1975, 1980, and 1998 to 2000.

3.6.3 Winklepeck Burning Grounds

MEC cleanup activities were performed on various portions of the site during 2004 to 2005 and 2008 to 2009.

3.6.4 Ramsdell Quarry Landfill

Ramsdell Quarry Landfill was operated as a State of Ohio permitted sanitary landfill in 1978 and was closed under state of Ohio solid waste regulations in 1990.

3.7 BASIS FOR TAKING ACTION

The basis for taking action at each site is summarized on forms provided in Attachment 3 and discussed below.

3.7.1 Load Lines 1 Through 4

Table 3 lists COCs that were detected in soil and dry sediment at Load Lines 1 - 4. They were present at concentrations that exceeded human health criteria associated with a National Guard trainee receptor (incremental lifetime cancer risk [ILCR] greater than 10^{-5} and/or hazard index [HI] greater than one). Potentially complete exposure pathways were identified in the risk assessment for inhalation, ingestion, and direct contact.

Table 3 COCs in Soil and Dry Sediment at Load Lines 1 Through 4

COC	Load Line			
	1	2	3	4
<i>Inorganics</i>				
Aluminum		X	X	X
Antimony		X		
Arsenic	X	X	X	X
Barium			X	
Cadmium			X	
Chromium, hexavalent		X		
Lead	X			
Manganese	X	X	X	X
<i>Explosives</i>				
2,4,6-TNT	X	X	X	
RDX	X	X		
<i>PCBs</i>				
Aroclor-1254	X	X	X	X
<i>SVOCs</i>				
Benz(a)anthracene	X			
Benzo(a)pyrene	X	X	X	
Benzo(b)fluoranthene	X			
Dibenz(a,h)anthracene	X			

3.7.2 Load Line 12

Soil and dry sediment within a section of the main ditch contained arsenic at concentrations that exceeded an ILCR greater than 10^{-5} for a National Guard trainee receptor. Arsenic is the sole COC for Load Line 12. Potentially complete exposure pathways were identified in the risk assessment for inhalation, ingestion, and direct contact.

3.7.3 Winklepeck Burning Grounds

The COCs listed below were present in soil and dry sediment at concentrations that exceeded risk-based levels. Potentially complete exposure pathways were identified in the risk assessment for inhalation, ingestion, and direct contact associated with an OHARNG range maintenance soldier.

- RDX
- Benz(a)anthracene
- Benzo(a)pyrene
- Benzo(b)fluoranthene
- Dibenz(a,h)anthracene
- Indeno(1,2,3-cd)pyrene

3.7.4 Ramsdell Quarry Landfill

The COCs listed below were present in soil and dry sediment at concentrations that exceeded risk-based levels for a National Guard security guard/maintenance worker. Potentially complete exposure pathways were identified in the risk assessment for inhalation, ingestion, and direct contact.

- Benz(a)anthracene
- Benzo(a)pyrene
- Benzo(b)fluoranthene
- Dibenz(a,h)anthracene
- Indeno(1,2,3-cd)pyrene

4.0 REMEDIAL ACTIONS

Remedial action summaries for each site are provided in Attachment 3 and discussed below.

4.1 LOAD LINES 1 THROUGH 4

4.1.1 Remedy Selection

The remedial action objective (RAO) identified in the 2007 Interim ROD was established to prevent ingestion, inhalation, or direct contact with COCs exceeding cleanup goals (identified in Table 4) for soil and dry sediment. Interim status was applied to the ROD because soil beneath the former building slabs was excluded.

Table 4 Load Lines 1 Through 4 Soil Cleanup Goals

COC	Cleanup Goal (mg/kg) ^{1,2}
<i>Inorganics</i>	
Aluminum	34,942
Antimony	2,458
Arsenic	31
Barium	3,483
Cadmium	109
Chromium, hexavalent	16
Manganese (surface soils)	1,800
Manganese (subsurface soils)	3,030
Lead	1,995
<i>Explosives</i>	
2,4,6-TNT	1,646
RDX	838
<i>PCBs</i>	
Aroclor-1254	35
<i>SVOCs</i>	
Benz(a)anthracene	105
Benzo(a)pyrene	10
Benzo(b)fluoranthene	105
Dibenz(a,h)anthracene	10

Notes:

mg/kg - milligrams per kilogram

¹ Soil 0 to 4 ft bgs is used for a National Guard trainee. Surface soils refer to the interval from 0 to 1 ft bgs and subsurface soil is greater than 1 ft bgs.

² Cleanup goals are based on an individual ILCR of 10⁻⁵ and/or a HI of 1.

The selected remedy for surface and subsurface soil and dry sediment at Load Lines 1 - 4 was excavation and off-site disposal. This remedy included the following components (USACE 2007):

- Excavation of discrete areas of contaminated surface and subsurface soil and dry sediment that contained COCs at concentrations exceeding the cleanup goals
- Temporary on-site storage of excavated soil and dry sediment via stockpiling for characterization
- Off-site disposal of excavated soil and dry sediment at a permitted landfill and, as needed, at a TSCA and/or RCRA permitted landfill
- Replacement of excavated material with compacted clean backfill
- Groundwater monitoring to ensure the remedy does not impact groundwater
- Maintenance of building slabs and foundations

The Interim ROD required groundwater monitoring for five years to ensure that the remedial activities did not impact groundwater and to determine pre-remedial conditions. No numerical goals were established to interpret the groundwater data. Sampling was required on a semi-annual basis for the first two years after the remedy was implemented. After the initial two-year period, the sampling frequency would be determined based on the analytical results. The following monitoring wells to be used were listed in the *Final Remedial Action Work Plan Remediation of Soils at Load Lines 1, 2, 3, and 4* (Shaw 2007):

- LL1mw-067, -078, -081, -082, -084, -085
- LL2mw-262, -263, -266, -267, -269
- LL3mw-236, -238, -239
- LL4mw-196, -197, -198

Results would be evaluated in the context of a facility-wide groundwater monitoring program and any follow-up actions would be determined by the U.S. Army with Ohio EPA approval. Groundwater remedial action is deferred pending the completion of this facility-wide groundwater monitoring program.

The concrete slabs and building foundations that remained in place after remediation would be inspected periodically to ensure that their integrity was not compromised.

4.1.2 Remedy Implementation

The Interim ROD remedy was implemented during August to November 2007. A total of 11,241 tons of contaminated soil and dry sediment was removed from 119 locations and disposed off-site. The excavated material included 1,752 tons of PCB-contaminated soil/dry sediment and 9,489 tons of non-hazardous soil/dry sediment (Table 5). The maximum depth of the excavations was 3 ft bgs and most excavations were typically 2 ft bgs. The excavated areas are illustrated in Figures 3 to 6.

Table 5 Volume of PCB Contaminated and Non-Hazardous Excavated Soil and Dry Sediment from Load Lines 1 Through 4

Load Line	Excavated Soil and Dry Sediment (tons)	
	PCB-Contaminated	Non-Hazardous
1	539	3,126
2	320	2,617
3	893	2,538
4	0	1,208
Totals	1,752	9,489

Soil and dry sediment confirmation sampling was performed using a multi-increment sampling method. All cleanup goals were met. Each excavation area was restored by placing clean fill from an off-site source and seeding. Baseline groundwater samples were collected in accordance with the *Final Remedial Action Work Plan Remediation of Soils at Load Lines 1, 2, 3, and 4* (Shaw 2007).

Soils from beneath the slabs and adjacent to the slabs were sampled in 2008 (Load lines 2, 3, and 4) and 2009 (Load lines 1, 3, and 4). The building slabs and foundations were removed in 2008 and 2009. Contaminated soil and dry sediment was subsequently removed and disposed off-site. This activity was not specified in the Interim ROD. It was documented in U.S. Army correspondence to Ohio EPA (BRACD 2008).

Sampling, analysis, and remedial actions performed in areas not addressed by the Interim ROD have been discussed in other documents, which include:

- *Final Multi-Increment Sampling and Analysis of Soils Below Floor Slabs at RVAAP-09 Load Line 2, RVAAP-10, Load Line 3, and RVAAP-11 Load Line 4* (December 2009)
- *Final Sampling and Analysis of Soils Below Floor Slabs at RVAAP-08 Load Line 1 and Other Building Locations* (September 2010)
- *Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-09 Load Line 2, RVAAP-10 Load Line 3, and RVAAP-11 Load Line 4* (December 2010)
- *Final Sampling Report of Surface and Subsurface Incremental Sampling Methodology at Load Lines 1, 2, 3, and 4 (RVAAP-08, 09, 10, and 11) Ravenna Army Ammunition Plant* (March 2011)
- *Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-08 Load Line 1* (March 2011)
- *Final Characterization Sampling Report of Surface and Subsurface Incremental Sampling Methodology at Load Lines 1, 2, 3, 4 and 12 (RVAAP-08, 09, 10, 11, and 12) Ravenna Army Ammunition Plant Ravenna, Ohio* (March 2013)

Load Lines 1–4 are currently undergoing a FS addendum to evaluate the need for additional soil and dry sediment remediation to achieve less restrictive use (residential or commercial/ industrial) of the sites. This activity was not identified in the Interim ROD. It is being performed to remove the need for access restrictions and site controls that would hamper future

military training activities. The final FS addendum has not been released. A ROD amendment will be prepared to address any additional remediation needed to achieve less restrictive use of the site (ARNG 2016).

4.1.3 Maintenance and Monitoring

4.1.3.1 Groundwater

In general, groundwater samples have been collected for soil COCs from monitoring wells identified in the Interim ROD. Groundwater at Camp Ravenna is managed through a facility-wide approach called the “Facility-Wide Groundwater Monitoring Program”, which is a component of the *Director’s Final Findings and Orders*. A separate RI/FS will be completed for facility-wide groundwater. These activities are being performed outside of the Interim ROD requirements.

4.1.3.2 Building Slabs and Foundations

Inspection and maintenance of the building slabs and foundations required by the Interim ROD was not performed because these structures were removed in 2008 and 2009.

4.2 LOAD LINE 12

4.2.1 Remedy Selection

The RAO presented in the 2009 ROD was established to prevent a National Guard trainee from exposure to contamination in surface soil and dry sediment in the main ditch, which was defined as the top 4 ft of soil. The cleanup goal for arsenic was 31 mg/kg.^{3,4}

The selected remedy included the following components (SAIC 2009a):

- Preparation of a remedial design plan to detail preparatory activities, the extent of excavation, construction implementation and sequencing, decontamination, segregation, transportation, disposal of various waste streams, and LUCs
- Excavation and off-site disposal of contaminated soil and dry sediment from the main ditch to a depth of 4 ft bgs
- Handling of excavated materials and truck transportation to a licensed and permitted disposal facility
- Confirmatory sampling to verify that the cleanup goal had been achieved
- Restoration of the remediated area by backfilling with clean soil and revegetation
- Implementation of LUCs until the arsenic concentrations in soil and groundwater are reduced to levels that allow for unrestricted use

Details of the LUC implementation, maintenance, and periodic inspections were provided in the *Final Remedial Design for the RVAAP-12 Load Line 12* (SAIC 2009c). The LUC performance objectives included:

- Maintenance of the Camp Ravenna perimeter fence
- Restricting future land use to mounted training (military use)
- Maintenance of the LUC program

³ Sediment from the main ditch aggregate

⁴ Total ICLR greater than 10^{-5} to a National Guard trainee from contaminants in the main ditch

- Limiting activities to tracked and wheeled operations that are consistent with a National Guard mounted training scenario and other essential security, safety, and natural resources management activities
- Prohibiting digging beyond 4 ft bgs, except for ground surface repairs resulting from maneuver damage and routine maintenance of the roads, ditches, and culverts

The remedial design also established the following actions to ensure that the LUC objectives are met:

- Preparing geographic information system (GIS) data and a map indicating the location and dimensions of the AOC with the LUC location. This would include signage and markers placed in locations to identify areas where the LUC applies
- Incorporating an environmental overlay and appropriate Ohio EPA notice procedures into a PMP
- Through the PMP, prohibiting digging or excavation activities beyond 4 ft bgs, except for routine maintenance of roads, ditches, and culverts; and ground surface repairs resulting from maneuvering damage
- Through the PMP, maintaining the Camp Ravenna perimeter fence and limiting activities to tracked and wheeled operations that are consistent with a National Guard mounted training scenario and other essential security, safety, and natural resource management activities
- Periodic monitoring in the form of site inspections conducted by the U.S. Army to confirm whether the LUCs remain effective and meet LUC objectives

LUCs concerning disturbance of soil and restriction to military training use were expected to remain in place indefinitely unless further action was taken to reduce the concentrations of hazardous substances in soil to levels that allow for other uses of the site.

Site inspections would be conducted as necessary, but not less than once per year. Monitoring results would be reported in an annual LUC report, which would be used for the CERCLA 121(c) five-year review. A written certification was required in the LUC monitoring report stating whether or not the LUCs remain in place and are effective.

4.2.2 Remedy Implementation

The remedy was implemented in 2010. A total of 1,181 tons of sediment were removed from the main ditch and disposed off-site (SAIC 2010c). Figure 7 shows the location of remediated areas. All confirmation sampling results were below the cleanup goal. Approved backfill from an off-site source was placed and graded to match the existing drainage channel and neighboring elevations. The ditch and disturbed construction support areas were revegetated after backfilling and grading was completed.

Surface soil samples were collected in 2011 to address data gaps that were identified in a comprehensive assessment of previous environmental data that was conducted to guide future remedial and administrative measures at the site (Prudent 2013). The results were compared to cleanup goals for National Guard trainee and resident adult farmer receptors presented in the *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant* (SAIC 2010a). These activities were not identified in the ROD.

Load Line 12 is currently undergoing a FS addendum to evaluate the need for additional soil and dry sediment remediation to achieve less restrictive use (residential and commercial/industrial) of the site. This activity was not identified in the ROD. It is being performed to remove the need for access restrictions and site controls that would hamper future military training activities. The final FS addendum has not been released. A ROD amendment will be prepared to address any additional remediation needed to achieve unrestricted use of the site (ARNG 2016).

LUCs, including site inspections and preparation of a LUC monitoring report, have not been officially implemented.

4.2.3 Maintenance and Monitoring

No maintenance and monitoring activities associated with the ROD have been conducted at the site since the remedy was implemented in 2010. The site has not been used for military training since the ROD was issued.

4.3 WINKLEPECK BURNING GROUNDS

Two separate remedies were selected for the site. They represent remedial actions identified in a ROD (2008) and in a subsequent ESD (2015).

4.3.1 Remedy Selection

4.3.1.1 ROD Remedy

The RAO identified in the 2008 ROD was established to prevent exposure of a National Guard range maintenance soldier to contaminants in soil and dry sediment exceeding risk based cleanup goals to a maximum depth of 4 ft bgs. These cleanup goals are listed in Table 6.

Table 6 Winklepeck Burning Grounds Soil Cleanup Goals for 2008 ROD Remedial Action

COC	Cleanup Goal (mg/kg) ^{5,6}
<i>Explosives</i>	
RDX	617
<i>SVOCs</i>	
Benz(a)anthracene	75
Benzo(a)pyrene	7.5
Benzo(b)fluoranthene	75
Dibenz(a,h)anthracene	7.5
Indeno(1,2,3-cd)pyrene	75

The selected remedy for former burning pads 61, 61A, and 67 was removal and off-site disposal of chemically contaminated soil and dry sediment concurrent with munitions and explosives of concern (MEC) removal. The selected remedy for former burning pad 70 was ACM removal. These remedies included the following components (SAIC 2008):

- Clearing of vegetation

⁵ Soil 0 to 4 ft bgs, National Guard range maintenance soldier

⁶ Cleanup goals are based on a cumulative ILCR greater than 10^{-5} to an OHARNG range maintenance soldier

- Geophysical surveys and visual inspections to identify metal debris
- Removal of transite and friable asbestos from the surface and subsurface within the footprint of pad 70
- Excavation of contaminated soil by layers to depths of 1 to 4 ft
- Screening (sifting) of the excavated soil for metal debris (potential MEC)
- Confirmation sampling to determine chemical characteristics of the remaining soil and to verify the absence of visible asbestos within the sides and bottom of the excavation
- Multi-increment sampling and testing of sifted soil to determine disposal requirements
- Disposal of contaminated soil at an approved off-site facility
- Backfilling the excavations using material from a source approved by the U.S. Army and Ohio EPA
- Site restoration
- Implementing LUCs for the AOC

LUC details were provided in the *Final Remedial Action Work Plan [for] Winklepeck Burning Grounds* (MKM 2008). The LUC performance objectives included:

- Maintenance of the Camp Ravenna perimeter fence
- Restricting future land use as a small arms weapons range
- Limiting activities to target practice; maintenance of targetry and associated lifting mechanisms; range maintenance, compatible natural resource management activities, and other activities that are consistent with a range maintenance soldier exposure scenario
- Prohibiting digging or excavation at the AOC outside of any unexploded ordnance (UXO)/MEC/discarded military munitions

The remedial action work plan (MKM 2008) also established the following actions to ensure that the LUC objectives are met:

- Preparing GIS data and a map indicating the location and dimensions of the AOC and the known extent of soil contamination with the LUC location. Signage and/or fencing would be placed in locations that do not conflict with the range impact area to identify the areas of known soil contamination.
- Incorporating an environmental overlay and appropriate procedures into the PMP
- Through the PMP, prohibiting all digging or excavation activities except for routine maintenance of roads, ditches, and culverts; ground surface repairs by authorized range personnel in support of range activities; and digging along target array areas by authorized range personnel to a depth of 1 ft bgs
- Through the PMP, maintaining the Camp Ravenna perimeter fence and restricting land use of the AOC as a small arms weapons range

LUCs concerning disturbance of soil in the AOC outside of UXO/MEC-cleared areas are expected to remain in place indefinitely. LUCs restricting use of the range are expected to remain in place indefinitely unless further action is taken to reduce the concentrations of hazardous substances in soil to levels that allow for UU/UE.

Periodic monitoring of the LUCs is required. It consists of conducting site inspections to confirm whether the LUCs remain effective and meet objectives for continued remedy

protectiveness. The frequency of the inspections is not less than once per quarter and as necessary. Monitoring results are to be included in an annual LUC monitoring report that is provided to the Ohio EPA and used for five-year reviews. The LUC monitoring reports require written certification stating whether or not the LUCs remain in place and are effective.

4.3.1.2 ESD Remedy

An ESD (USACE 2015a) was prepared to enable using the site as a Multi-Purpose Machine Gun range, which requires more flexibility for training than currently allowed for the Mark 19 Grenade Machine Gun range. A RAO was identified in the *Remedial Design for Post ROD Changes to the Remedy at RVAAP-05 Winklepeck Burning Grounds* (USACE 2015c) as:

“Prevent exposure to soils with contaminant concentrations greater than cleanup goals which are based on USEPA Industrial RSLs.”

COCs and cleanup goals identified in the 2015 ESD include PAHs, RDX, and TNT at concentrations that meet the 10^{-5} cumulative excess lifetime cancer risk and a non-cancer HI of 1 for a full-time military workers (commercial industrial land use). Remedial action requirements for these COCs are expressed in terms of areas, depths, and volumes of contaminated soil to be removed. The *Draft Remedial Investigation/Feasibility Study Supplement for RVAAP-05 Winklepeck Burning Grounds* (USACE 2014) provides COC concentrations corresponding to these cleanup goals, which are listed in Table 7.

Table 7 Winklepeck Burning Grounds Soil Cleanup Goals for 2015 ESD Remedial Action

COC	Cleanup Goal (mg/kg)	Basis ⁷
<i>Explosives</i>		
RDX	240	1
2,4,6-TNT	420	2
<i>SVOCs</i>		
Benzo(a)pyrene	2.1	1

1 Target cancer cumulative risk = 10^{-5}

2 Total hazard quotient = 1

The remedy requires removal of approximately 5,280 cubic yards (yd³) of contaminated soil from former burning pads 38, 61/61A, and 66/67.

4.3.2 Remedy Implementation

4.3.2.1 ROD Remedy

4.3.2.1.1 Soil Excavation

The ROD remedy was implemented in 2008 and 2009. A total of 7,384 yd³ of soil was removed and disposed off-site (Table 8). The excavated areas are illustrated in Figure 8.

⁷ USEPA Industrial Soil Risk Screening Levels

Table 8 Volume of Excavated Soil and Dry Sediment from Winklepeck Burning Grounds

Location	Excavated Soil and Dry Sediment (yd ³)
Pad 61	2,334
Pad 61 Berm	2,000
Pad 61A	2,160
Pad 67	90
Pad 70	800
Total	7,384

A total of 19 MEC items were recovered and demolished during the remedial action, which included Mark II hand grenades, 40-millimeter practice grenades, point detonating fuses, point detonating device M52B1, grenade fuses, and a base detonating fuse. Recovered scrap metal was inspected to ensure that explosive materials were absent. It was subsequently shipped off-site for recycling.

ACM was discovered during excavation activities at burning pads 61 and 61A. Work was paused while health and safety concerns were addressed; the excavation was then resumed as planned. All confirmation samples from the excavations were below the site cleanup goals.

4.3.2.1.2 LUCs

A final PMP was issued in 2012 (USACE 2012b). It describes LUCs and restrictions for AOCs at Camp Ravenna. Land use and engineering controls for Winklepeck Burning Grounds are provided in an appendix to the PMP that includes:

- A description of land use and activities
- A map showing the location and dimensions of the AOC
- A description of the LUCs
- Monitoring and reporting requirements

4.3.2.2 ESD Remedy

The ESD remedial action was started in November 2016.

4.3.3 Maintenance and Monitoring

Quarterly LUC inspections have been conducted at Winklepeck Burning Grounds since February 2013. They included:

- A review of training applicable to the site-specific LUCs
- An inspection of the Camp Ravenna perimeter fence to ensure that it is maintained in a manner that is protective and deters trespassers
- A review of current land uses at the site to determine if they are in compliance with the LUCs
- A description of any noted LUC deficiencies, any corrective actions taken to remedy the deficiencies, and/or any recommended corrective action

Annual and quarterly reports have been issued since 2013. Results are summarized below.

- LUC awareness training and refresher training has been provided annually to all Camp Ravenna staff and tenant units at Camp Ravenna. Military units have also been briefed prior to using the range.
- The entire Camp Ravenna perimeter fence has been inspected quarterly. Breaches in the fence that would allow an adult unlawful access to the installation were documented and compiled on GIS-based figures. Overall, the fence has been intact and in good condition. The ARNG has been notified of any breaches and subsequent LUC inspections checked these areas to verify whether required repairs have been made.
- Land use has been consistent with LUC requirements
- Quarterly and annual LUC monitoring reports have been prepared in accordance with the requirements

4.4 RAMSDELL QUARRY LANDFILL

4.4.1 Remedy Selection

Two separate remedies were selected and implemented at the site. They represent remedial actions identified in a ROD and in a subsequent ROD amendment.

4.4.1.1 ROD Remedy

The ROD for soil and dry sediment at Ramsdell Quarry Landfill was issued in March 2009 (SAIC 2009b). The RAO was to prevent security guard/maintenance worker exposure to contaminants in soil and dry sediment that exceeded cleanup goals listed in Table 9 to a depth of 1 ft bgs.

Table 9 Ramsdell Quarry Landfill Cleanup Goals

COC	Cleanup Goal (mg/kg)
Benz(a)anthracene	13
Benzo(a)pyrene	1.3
Benzo(b)fluoranthene	13
Dibenz(a,h)anthracene	1.3
Indeno(1,2,3-cd)pyrene	13

The selected remedy involved excavation and off-site disposal of contaminated soil and dry sediment that exceeded cleanup goals for reasonably anticipated activities performed at the site. The remedy included the following components:

- Preparation of a remedial design plan
- Excavation of contaminated soil and dry sediment
- Handling of excavated materials
- Off-site disposal
- Confirmatory sampling
- Site restoration
- LUCs

Post-closure care and maintenance of the landfill would continue in accordance with Ohio solid waste regulations.

LUC details were provided in the *Revised Final Remedial Design* (SAIC 2010b). The LUC performance objectives included:

- Maintenance of the Camp Ravenna perimeter fence
- Restricting future land use as “restricted access”
- Maintaining a LUC training program
- Limiting site activities to those that are consistent with the security guard/maintenance worker exposure scenario, which includes site security, safety, natural resources management, and landfill management
- Wetland monitoring for a minimum of five years after completion of the remedial action
- Prohibiting digging or excavation within the AOC boundary with the exception of the sanitary landfill where post-closure care and maintenance activities would be governed by Ohio solid waste regulations

The remedial design established the following actions to ensure that the LUC objectives were met:

- Preparing GIS data and a map identifying the AOC boundary and the LUC location signage/markers would be placed in locations to identify the areas where the LUCs apply
- Incorporating an environmental overlay and appropriate notice procedures into the PMP
- Through the PMP, prohibiting all digging or excavation activities except for ground surface repairs by authorized personnel in support of landfill cap integrity
- Through the PMP, maintaining the Camp Ravenna perimeter fence and restricted access land use of the landfill
- Through the PMP, implementing wetlands monitoring for a minimum of five years after the completion of the remedial action, which would include:
 - Weekly monitoring of the site until storm water pollution prevention plan (SWPPP) requirements were met
 - Quarterly monitoring of the mitigated wetland once the SWPPP controls were achieved
 - Removal of invasive species to ensure that no more than 25 percent invasive species were present in the established wetland
 - Preparation of an annual report that summarizes quarterly monitoring activities

LUCs would be maintained until the contaminant concentrations in soil and groundwater were reduced to levels that allow for unrestricted use. Wetland monitoring may be discontinued after a minimum five year period.

4.4.1.2 ROD Amendment Remedy

An engineering evaluation (SAIC 2011b) was performed to address friable ACM that was encountered during implementation of the remedial action. A ROD amendment (SAIC 2013) was issued in May 2013 because the presence of friable ACM was considered a fundamental change to the basic features of the remedy selected in the ROD with respect to scope, performance, or cost. The following RAO for this amended remedial action was presented in the *Final Remedial Design for Soil and Dry Sediment at RVAAP-01 Ramsdell Quarry Landfill* (Leidos 2014b):

- 1095 • Protect future receptors from remaining COCs in soil above site cleanup goals and
1096 residual asbestos by restricting access to the AOC.

1097 The amended remedy consisted of:

- 1098 • A fence at the perimeter of the site to encompass the closed landfill, quarry bottom, and
1099 wetlands
1100 • Implementing best management practices to remove surficial ACM through non-
1101 intrusive/no-digging methods

1102 **4.4.2 Remedy Implementation**

1103 4.4.2.1 ROD Remedy

1104 The remedial action was started in 2010 with the excavation of soil and dry sediment in the
1105 quarry bottom at the northeastern section of the site. Debris was encountered in the excavation
1106 that included construction and miscellaneous material that was suspected ACM. ACM was not
1107 identified as a COC in the ROD and the following actions were taken:

- 1108 • Samples were collected to verify the waste profile, which confirmed that friable ACM
1109 was present
1110 • A plan was developed to handle, transport, and dispose of the soil/ACM
1111 • The excavation was continued until ACM was no longer visible
1112 • The area was restored

1113 Approximately 1,100 tons of soil and construction debris (considered friable ACM) was
1114 removed and disposed off-site. The excavation area encompassed approximately 10,000 square
1115 feet (ft²) and extended approximately 5,800 ft² beyond the delineated excavation area. Figure 9
1116 shows the location of the excavation area. The remedial action was not completed because the
1117 presence of ACM in the quarry bottom was considered an appreciable change in scope,
1118 performance, and cost of attaining the remedy for soil and dry sediment.

1119 LUCs were instituted in December 2014, they consisted of:

- 1120 • Prohibiting all digging or excavation within the quarry bottom
1121 • Installation and maintenance of permanent warning signs, every 300 ft, on the landfill
1122 perimeter fences and gates in accordance with Ohio Administrative Code (OAC) 3745-
1123 20-07(B)(1)(b)
1124 • A requirement to brief any personnel entering the quarry bottom on the asbestos hazards
1125 and a requirement to sign an access log sheet for each entry/exit

1126 4.4.2.2 ROD Amendment Remedy

1127 The ROD amendment remedy was implemented in August to November 2014. It consisted of:

- 1128 • Installation of 914 ft of chain-link security fence at the landfill boundary with Ramsdell
1129 Road
1130 • Installation of five-strand high tensile wire fence at the eastern, southern, and western
1131 perimeter of the landfill
1132 • Placement of asbestos warning signs on the perimeter fences at 300 ft centers
1133 • Removal of approximately 200 pounds of ACM from the ground surface,
1134 containerization, and off-site disposal

1135 Figure 9 shows the location of the perimeter fence.

1136 **4.4.3 Maintenance and Monitoring**

1137 Inspections are conducted annually to confirm that the LUCs are effective. They consist of:

- 1138 • A review of LUC training, correspondence, maintenance logs, access logs, and other
1139 documentation applicable to the site
- 1140 • An evaluation of site activities to ensure that established digging restrictions and
1141 exposure limits (i.e. one hour per day for 250 days per year for 25 years) are being
1142 complied with
- 1143 • Inspection of the warning signs, fencing, and gates

1144 Any LUC deficiencies or inconsistent land uses will be identified on an inspection form and
1145 reported to ANRG and OHARNG.

1146 One annual inspection has been performed since the LUCs were instituted in December 2014.
1147 Results were documented in a 2015 Annual Land Use Control Monitoring Report (Vista 2016a)
1148 and are summarized below. No deficiencies were noted.

- 1149 • Land use has not changed at the site
- 1150 • Repairs to the high tensile wire fence were made (single strand wire breaks)
- 1151 • Eroded areas outside of the landfill cap were repaired
- 1152 • Annual mowing was conducted in October 2015
- 1153 • Weekly inspections of the landfill were performed in accordance with state of Ohio solid
1154 waste regulations and the *Director's Final Findings and Orders*
- 1155 • Exposures to personnel entering the site were tracked on sign in/out sheets
- 1156 • The warning signs were present and in good condition
- 1157 • The perimeter fences and gates were intact and in good condition; no deficiencies were
1158 noted
- 1159 • Annual LUC training was provided to Camp Ravenna staff and tenants in March 2015
- 1160 • A "LUC brief for contractors/personnel" was conducted for all individuals that entered
1161 the site

5.0 PROGRESS SINCE LAST REVIEW

The first five-year review of Load Lines 1-4, Load Line 12, Winklepeck Burning Grounds, and Ramsdell Quarry Landfill was performed and a report was issued in August 2012. The following protectiveness statements were provided in the first five-year review report:

- **Load Lines 1, 2, and 4** (Protective) The remedies at Load Lines 1, 2, and 4 are protective of a OHARNG trainee engaged in mounted training with no digging because contaminated soil and dry sediment exceeding cleanup levels has been excavated and disposed off-site.
- **Load Line 3** (Short-term protective) The remedy at Load Line 3 currently protects an OHARNG trainee engaged in mounted training with no digging because the site is fenced and OHARNG has not used the site. However, in order for the remedy to be protective in the long-term, environmental data should be evaluated to determine if additional sampling and/or remediation is needed to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above cleanup levels specified in the Interim ROD.
- **Load Line 12** (Short-term protective) The remedy at Load Line 12 currently protects an OHARNG trainee engaged in mounted training with no digging because contaminated soil and dry sediment exceeding the cleanup level has been excavated and disposed off-site. The site is not used by OHARNG and access is restricted by a perimeter fence. However, in order for the remedy to be protective in the long-term, LUCs must be officially implemented through a PMP.
- **Winklepeck Burning Grounds** (Short-term protective) The remedy at Winklepeck Burning Grounds currently protects the OHARNG range maintenance soldier because contaminated soil and dry sediment exceeding cleanup levels at former burning pads 61, 61A, 67, and 70 has been excavated and disposed offsite. The site is used by OHARNG as a firing range and access is restricted by OHARNG. However, in order for the remedy to be protective in the long-term, LUCs must be officially implemented through a PMP.
- **Ramsdell Quarry Landfill** (Not protective) The remedy at Ramsdell Quarry is not protective because the remedial action was not completed. It does not protect a current or future security guard/maintenance worker from contaminated soil and dry sediment that are present at the site.

1201 Table 10 lists issues and recommendations identified in the first five-year review.

Table 10 Issues Identified and Recommendations Provided in the First Five-Year Review

Issue	Recommendation	Affects Protectiveness?	
		Short-term	Long-term
1. LUCs have not been officially implemented through a PMP on Load Line 12, Winklepeck Burning Grounds, and the Ramsdell Quarry Landfill.	Complete the Facility-Wide PMP currently being drafted for each of the RVAAP sites to ensure future protectiveness and officially implement the LUCs	No	Yes
2. Benzo(a)pyrene, Aroclor-1254, and manganese were detected in soil and dry sediment at Load Line 3 at concentrations that exceeded the cleanup goals specified in the Interim ROD	Evaluate current environmental data and determine if additional sampling and/or remediation is needed at Load Line 3 to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above the cleanup levels specified in the Interim ROD	No	Yes
3. The remedial action was not completed at Ramsdell Quarry Landfill due to the presence of ACM in the subsurface	Reevaluate remedial alternatives for Ramsdell Quarry Landfill due to the fundamental change resulting from the presence of friable ACM encountered during the remedial action	Yes	Yes

1202 The status of these recommendations and actions taken since the last five-year review to address
1203 them are discussed below.

1204 **Issue 1:** A facility-wide PMP was issued in August 2012. It identifies LUCs and
1205 restrictions for Winklepeck Burning Grounds and provides mechanisms to
1206 implement and manage those LUCs. LUCs for Ramsdell Quarry Landfill and
1207 Load Line 12 have not been added to the PMP. LUC details for Ramsdell Quarry
1208 Landfill are provided in the remedial design report (SAIC 2010b) and have been
1209 implemented since December 2014. LUCs for Load Line 12 will be incorporated
1210 into the PMP in 2017. This site has not been used since the previous five-year
1211 review.

1212 **Issue 2:** Environmental data has been collected and is being evaluated in a FS Addendum;
1213 a draft report was issued in November 2016. Load Line 3 has not been used since
1214 the previous five-year review.

1215 **Issue 3:** Remedial alternatives were reevaluated in a ROD amendment that was issued in
1216 2013. The revised remedy was implemented in 2014.

1217 There were no other prior issues at these sites.

6.0 FIVE-YEAR REVIEW PROCESS

6.1 ADMINISTRATIVE COMPONENTS

The following activities were performed for the five-year review:

- Potentially interested parties and the local community were notified of the start of the five-year review
- Documents and site data were reviewed
- Site inspections were performed
- Interviews were conducted with ARNG, Camp Ravenna employees and contractors, USACE Louisville District employees, Ohio EPA, and a community Restoration Advisory Board (RAB) member

This five-year review report was conducted and written by staff of the USACE Buffalo District.

- Laura Allen, Environmental Engineer
- Michelle Barker, FE, PMP, HTRW Regional Technical Specialist
- Karen Keil, PhD, Environmental Toxicologist
- Jim Stachowski, PE, Environmental Engineer

Staff from Camp Ravenna also provided assistance.

- Kevin Sedlak, Restoration Project Manager
- Katie Tait, Environmental Specialist

6.2 COMMUNITY NOTIFICATION AND INVOLVEMENT

A public notice was issued to potentially interested parties and community RAB members that the five-year review process had begun. The notice was published in two local newspapers, the Akron Beacon Journal (August 21, 2016) and the Record-Courier (August 28, 2016). Copies of the notice and newspaper articles are provided in Attachment 9.

The five-year review report will be made available to the public once it has been finalized. Copies of the report will be placed in the repositories identified below.

Reed Memorial Library
167 East Main Street
Ravenna, Ohio 44266

Newton Falls Public Library
204 South Canal Street
Newton Falls, Ohio 44444

An electronic copy will also be available at <http://www.rvaap.org>.

Upon completion of the five-year review report, a public notice will be placed in the Akron Beacon Journal, the Record-Courier, and the Tribune Chronicle to announce availability of the report in the document repositories.

6.3 DOCUMENT REVIEW

Relevant, site-related documents were reviewed, including the RODs, remedial design reports, ESD, remedial action completion reports, PMP, and monitoring/inspection reports. A complete list of documents reviewed is provided in Attachment 2.

6.4 DATA REVIEW

6.4.1 Load Lines 1 Through 4

6.4.1.1 Soil and Dry Sediment

New soil and dry sediment data since the previous five-year review is documented in the *Final Characterization Sampling Report of Surface and Subsurface Incremental Sampling Methodology at RVAAP-08, 09, 10, 11, and 12, Load Lines 1, 2, 3, 4 and 12* (Prudent 2013) and the *Draft Feasibility Study Addendum for Soil, Sediment, and Surface Water at RVAAP Load Lines 1, 2, 3, 4, and 12* (Leidos 2016j). This five-year review compared analytical results to the Interim ROD cleanup goals (Table 4). Concentrations that exceed these cleanup goals are summarized below. Data summary tables from the reports are provided in Attachment 11.

6.4.1.1.1 Load Line 1

Interim ROD cleanup goals were exceeded at sample location LL1SB-638M13, which was situated near former building CB-4A. A discrete sample from 1.0 to 5.0 ft bgs contained RDX at 1,500 mg/kg and 2,4,6-TNT at 2,700 mg/kg.

6.4.1.1.2 Load Line 2

An Interim ROD cleanup goal was exceeded at sample location LL2SD-631, which was situated in drainage channel. A discrete sample from 0 to 1 ft bgs contained benzo(a)pyrene at 23.6 mg/kg.

6.4.1.1.3 Load Line 3

Interim ROD cleanup goal exceedances were identified in the previous five-year review at three sample locations:

- LL3SB-414M-0102-SO, situated near former building EB-10A. An incremental sample from 3.0 to 5.0 ft bgs contained benzo(a)pyrene at 47 mg/kg.
- LL3SB-413M-0101-SO, situated near former building EB-4. An incremental sample from 1.0 to 3.0 ft bgs contained Aroclor 1254 at 100 mg/kg.
- LL3SD-416-001-SO, situated in a creek bed at the southwest section of the site. A discrete sample from 0 to 0.5 ft bgs contained manganese at 3,700 mg/kg. This location also includes co-located quality control and quality assurance samples LL3SD-417M-001-SO (3,400 mg/kg) and LL3SD-418M-001-SO (4,880 mg/kg).

Exceedances of the Interim ROD cleanup goals were not identified in soil and dry sediment data obtained since the previous five-year review.

6.4.1.2 Load Line 4

An Interim ROD cleanup goal was exceeded at sample location LL4SB-402M07, which was situated near former building G-8. A sample from 1 to 7.0 ft bgs contained benzo(a)pyrene at 51 mg/kg.

6.4.1.3 Groundwater

Groundwater data from monitoring wells at Load Lines 1-4 was evaluated in this five-year review to determine whether the remedial activities impacted groundwater and to determine pre-remedial groundwater conditions. Groundwater sampling has been performed under the Facility-Wide Groundwater Monitoring Program and did not follow the frequencies identified in the Interim ROD. Table 11 provides a summary of pre-remedial groundwater conditions. Results of the data evaluation are provided in Attachment 10 and discussed below.

6.4.1.3.1 Load Line 1

Analytical data for Interim ROD COCs from monitoring wells LL1mw-067, -078, -081, -082, -084, and -085 was evaluated. Information provided in Attachment 10, Table A10-1 (Load Line 1 Groundwater Data Summary) and Table A10-3 (Load Line 1 Groundwater Trend Plots) indicates that no impacts were observed.

- All PCB and PAH results since the remedial action have been non-detect.
- Most explosives results were non-detect. Trend plots for well LL1mw-084 show no apparent trends for 2,4,6-TNT and RDX.
- Many of the inorganic COC results were non-detect. Trend plots for wells that contained detectable concentrations of inorganic COCs and Mann-Kendall trend analysis (where appropriate) show no apparent trends or downward trends.

6.4.1.3.2 Load Line 2

Analytical data for Interim ROD COCs from monitoring wells LL2mw-262, -263, -266, -267, and -269 was evaluated. Information provided in Attachment 10, Table A10-4 (Load Line 2 Groundwater Data Summary) and Table A10-6 (Load Line 2 Groundwater Trend Plots) indicates that no impacts were observed.

- All PCB and PAH results since the remedial action have been non-detect.
- Explosives results for wells LL2mw-262, -263, -266, -267, and -269 were non-detect. Trend plots and Mann-Kendall trend analysis for 2,4,6-TNT and RDX at LL2mw-267 show no trend.
- Many of the inorganic COC results were non-detect. Trend plots for wells that contained detectable concentrations of inorganic COCs and Mann-Kendall trend analysis (where appropriate) show no apparent trends or downward trends.

6.4.1.3.3 Load Line 3

Analytical data for Interim ROD COCs from monitoring wells LL3mw-236, -238, and -239 was evaluated. Information provided in Attachment 10, Table A10-7 (Load Line 3 Groundwater Data Summary) and Table A10-9 (Load Line 3 Groundwater Trend Plots) indicates that no impacts were observed.

- All PCB and PAH results since the remedial action have been non-detect.
- Trend plots and Mann-Kendall trend analysis for 2,4,6-TNT and RDX at LL3mw-236 and -238 were either non-detect or showed downward trends. Trends at LL3mw-239 were downward for 2,4,6-TNT and upward for RDX. The RDX trend plot shows that

post remedial action groundwater sampling was first conducted approximately three years after the contaminated soil was excavated. It is unlikely that the excavations at former building EB-4A (nearest area remediated) is the cause of the apparent upward trend for RDX.

- Many of the inorganic COC results were non-detect. Trend plots for wells that contained detectable concentrations of inorganic COCs and Mann-Kendall trend analysis (where appropriate) show no apparent trends or downward trends.

6.4.1.3.4 Load Line 4

Analytical data for Interim ROD COCs from monitoring wells LL4mw-196, -197, and -198 was evaluated. Information provided in Attachment 10, Table A10-10 (Load Line 4 Groundwater Data Summary) and Table A10-12 (Load Line 4 Groundwater Trend Plots) indicates that no impacts were observed.

- All PCB and PAH results since the remedial action have been non-detect.
- All RDX results and most 2,4,6-TNT results were non-detect.
- Many of the inorganic COC results were non-detect. Trend plots for wells that contained detectable concentrations of inorganic COCs and Mann-Kendall trend analysis (where appropriate) show no apparent trends.

6.4.2 Load Line 12

No exceedances of the arsenic cleanup goal were identified in new soil and dry sediment data since the previous five-year review.

6.4.3 Winklepeck Burning Grounds

No new soil and dry sediment data were available for review since the previous five-year review.

6.4.4 Ramsdell Quarry Landfill

No new soil and dry sediment data were available for review since the previous five-year review.

[This page intentionally left blank]

Table 11 Pre-remedial Groundwater Conditions at Load Lines 1 Through 4 ¹

Well	Date	COC													
		2,4,6-TNT	RDX	Benz(a)anthracene	Benzo(a)pyrene	Benzo(b)fluoroanthene	Dibenz(a,h)anthracene	PCB-1254	Aluminum	Antimony	Arsenic	Barium	Cadmium	Lead	Manganese
Load Line 1															
LL1-MW-067	8/1/2007	0.001	0.001	0.00549	0.00549	0.00549	0.00549	0.00051	0.1	0.00088	0.001	0.0203	0.01	0.001	0.0454
LL1-MW-078	8/2/2007	0.00102	0.00102	0.0051	0.0051	0.0051	0.0051	0.0005	0.1	0.000385	0.001	0.0115	0.01	0.001	0.0559
LL1-MW-081	8/2/2007	0.00102	0.00102	0.0051	0.0051	0.0051	0.0051	0.0005	0.1	0.001	0.00102	0.0236	0.01	0.001	2.09
LL1-MW-082	8/2/2007	0.001	0.001	0.0051	0.0051	0.0051	0.0051	0.0005	0.1	0.001	0.00191	0.0103	0.01	0.001	0.693
LL1-MW-084	8/2/2007	0.00918	0.00242	0.0051	0.0051	0.0051	0.0051	0.000538	1.59	0.000322	0.001	0.0166	0.01	0.00281	0.306
LL1-MW-085	8/2/2007	0.00105	0.00105	0.005	0.005	0.005	0.005	0.00051	1.59	0.000322	0.001	0.0166	0.01	0.00281	0.306
Load Line 2															
LL2mw-262	8/1/2007	0.00105	0.00105	0.00538	0.00538	0.00538	0.00538	0.000526	0.1	0.000315	0.000312	0.0151	0.01	0.001	0.291
LL2mw-263	8/1/2007	0.00102	0.00102	0.00538	0.00538	0.00538	0.00538	0.000521	0.1	0.001	0.0104	0.0311	0.01	0.001	0.837
LL2mw-266	8/1/2007	0.00103	0.00103	0.00532	0.00532	0.00532	0.00532	0.000549	0.1	0.000452	0.00488	0.0215	0.01	0.001	1.12
LL2mw-267	8/1/2007	0.00104	0.00104	0.005	0.005	0.005	0.005	0.000532	0.1	0.000525	0.00438	0.0241	0.01	0.001	0.594
LL2mw-269	7/31/2007	0.00104	0.00104	0.00521	0.00521	0.00521	0.00521	0.00051	0.1	0.001	0.000623	0.263	0.01	0.000423	1.78
Load Line 3															
LL3mw-236	7/31/2007	0.00105	0.00105	0.00526	0.00526	0.00526	0.00526	0.000562	0.1	0.001	0.000277	0.01	0.01	0.001	0.599
LL3mw-238	7/31/2007	0.0642	0.00842	0.0051	0.0051	0.0051	0.0051	0.00051	0.1	0.001	0.000434	0.01	0.01	0.001	0.01
LL3mw-239	7/30/2007	0.00105	0.00105	0.00521	0.00521	0.00521	0.00521	0.000532	0.1	0.00053	0.000981	0.0133	0.01	0.001	0.413
Load Line 4															
LL4mw-196	7/30/2007	0.00102	0.00102	0.0051	0.0051	0.0051	0.0051	0.00051	0.1	0.001	0.000709	0.0284	0.01	0.001	0.115
LL4mw-197	7/30/2007	0.00102	0.00102	0.0051	0.0051	0.0051	0.0051	0.00051	0.1	0.000333	0.000268	0.00397	0.01	0.000333	0.01
LL4mw-198	7/30/2007	0.00102	0.00102	0.00556	0.00556	0.00556	0.00556	0.0005	0.1	0.001	0.000421	0.00941	0.01	0.001	1.23

1355 1 All results are mg/L

[This page intentionally left blank]

6.5 SITE INSPECTIONS

Site inspections were conducted by USACE on August 10, 2016 to obtain familiarity with the sites, review records, examine the remediated areas, and assess protectiveness of the remedies. Observations are summarized below. Completed site inspection checklist forms are provided in Attachment 4 and site photographs are provided in Attachment 5.

6.5.1 Load Lines

Site conditions have not changed since the first five-year review. No additional remedial activities have occurred and the sites have not been used for military training. Load Lines 1, 2, 3, 4 and 12 are surrounded by perimeter fences with warning signs and reflective tape placed in strategic areas to prevent access by OHARNG personnel. The former buildings, including floor slabs, have been removed and the building footprints consist of grass-covered, open areas. Concrete walkways that previously connected these buildings are present. Railroad tracks and site roads have been removed and their corridors are now used to provide access for site maintenance and environmental sampling. The remainder of the sites consists of open grassland, scrub-brush, and forested areas. Remedial action areas have been backfilled to surrounding grades and revegetated. There was no evidence of unauthorized access or use of the sites. The monitoring wells were observed to be secure and in good condition.

6.5.2 Winklepeck Burning Grounds

Winklepeck Burning Grounds is an active firing range used by OHARNG. The site consists of open grass-covered land with gently undulating topography. East-west trending gravel or dirt roads traverse the site and are connected on each end by north-south trending roadways. An observation/control building is located at the western end of the site and other range infrastructure is present. Evidence of the former burning pads was not apparent. Remediated areas have been backfilled to surrounding grades and re-vegetated. Site access is restricted by OHARNG due to its use as a firing range.

6.5.3 Ramsdell Quarry Landfill

Ramsdell Quarry Landfill is a closed landfill located within a former quarry. The site is bounded to the north by Ramsdell Road and to the south by a rail line. The landfill surface slopes to the quarry bottom from the south and west. A wetland is present in the quarry bottom. The landfill cap is a grass-covered, maintained surface that appeared to be intact with no evidence of erosion or slope failure. Monitoring wells are secure and in good condition. The remediated area has been backfilled and revegetated. The landfill is surrounded by a perimeter fence that consists of a chain link fence at the boundary with Ramsdell Road and a five-strand wire fence at the eastern, southern, and western perimeter. Two types of warning signs are posted on the fences, an asbestos warning sign and a “danger unauthorized personnel keep out” sign. Two fence gates along Ramsdell Road were locked and a sign in/out form was available for authorized personnel who access the site. There was no evidence of trespass or OHARNG use. No significant maintenance issues were identified during the site inspection.

6.6 INTERVIEWS

Interviews were conducted with ARNG, OHARNG (Camp Ravenna), USACE (Louisville District), Vista Sciences Corporation, Ohio EPA, and the RVAAP RAB to provide additional information about the status of sites evaluated in the five-year review. A summary of relevant

issues from the interviews is provided below. Complete interview records are provided in Attachment 6.

6.6.1 Army National Guard Directorate

Mark Leeper, ARNG Environmental Cleanup Program Manager, did not identify any complaints, violations, or other incidents at the sites that required a response by his office. He was also not aware of any information that could call into question the protectiveness of the remedies.

6.6.2 Camp Ravenna

Kevin Sedlak, Camp Ravenna Restoration Program Manager, and Katie Tait, OHARNG Environmental Specialist, were interviewed.

Kevin's interview provided the following relevant information:

- The load line sites could not be used for military training after the removal actions were performed because of restrictions placed on their use. Additional samples have been collected and a FS addendum is being prepared.
- LUCs for Ramsdell Quarry Landfill will be incorporated into an upcoming version of the PMP.
- ESD removal actions are ongoing at Winklepeck Burning Grounds and are expected to be completed by the end of November 2016.

Katie's interview provided the following relevant information:

- A FS addendum is being performed for Load Lines 1, 2, 3, 4, and 12 to evaluate any additional remedial options that may be required to clean up the sites to a residential or commercial/industrial standard. The sites are being maintained for restricted access and perimeter gates are kept locked. A Camp Ravenna annual training memo identifies these areas as "restricted access".
- A paper copy of the PMP at Camp Ravenna has been updated to include the LUC requirements for Ramsdell Quarry Landfill.
- The ESD remedy at Winklepeck Burning Grounds is ongoing (November 2016). Pursuant to agreement with Ohio EPA, the Camp Ravenna perimeter fence will no longer be inspected during the routine Winklepeck Burning Grounds LUC inspections.

6.6.3 USACE Louisville District

Gregory Moore, Project Manager, Nathaniel Peters, Environmental Engineer, and Angela Schmidt, Risk Assessor, were interviewed.

Greg's interview provided the following relevant information:

- LUCs at the load line sites, as interpreted by Ohio EPA, have been too restrictive. The sites are currently undergoing a soil optimization study to eliminate the need for full cleaning of military vehicles during training.
- LUCs for Ramsdell Quarry Landfill will be incorporated into an upcoming version of the PMP. (Planned for fiscal year 2017).

- Soil removal actions at Winklepeck Burning Grounds will occur in November 2016.

Nathaniel's interview provided the following relevant information:

- A FS addendum is being prepared to assess the need for additional remediation to achieve residential or commercial/industrial land use standards. The document will incorporate environmental actions that have occurred at the sites since the Interim ROD remedial actions (Load Lines 1 - 4) and the ROD remedial action (Load Line 12).
- LUC monitoring and maintenance activities have been implemented at Ramsdell Quarry Landfill and an update to the PMP, which includes these LUCs, is draft form.
- The ESD for Winklepeck Burning Grounds changed the LUC requirements and inspection of the Camp Ravenna perimeter fence is no longer necessary. This change will be in effect after the ESD remedial action is completed.

Angela indicated that the load line sites cannot be used as intended (military training, vehicle maneuver area) due to monitoring requirements that would be implemented during the training. Additional sampling and analysis is ongoing and the sites will be remediated to residential or commercial/industrial land use criteria. A FS addendum is being prepared.

6.6.4 Vista Sciences Corporation

Allan Brillinger, Program Manager for Vista Sciences Corporation, (Camp Ravenna monitoring and maintenance contractor) indicated quarterly inspections of the Ramsdell Quarry Landfill will be started in September 2016 using a *Closed Municipal Solid Waste Landfill Inspection* checklist. The completed checklists and an annual report will be submitted to Ohio EPA to comply with Ohio regulations for closed municipal solid waste landfills.

6.6.5 Ohio EPA

Interview responses were provided by Ohio EPA employees Rodney Beals, Sue Watkins, and Nicholas Roope. Relevant information is summarized below.

6.6.5.1 Load Lines 1 Through 4

Ohio EPA would like more detail about the status of ongoing activities (particularly sampling) at these sites.

6.6.5.2 Load Line 12

Ohio EPA would like more detail about the status of ongoing activities (particularly sampling) at this site.

6.6.5.3 Winklepeck Burning Grounds

The Camp Ravenna fence will no longer be needed as a LUC after remedial activities outlined in the 2015 ESD are completed.

6.6.5.4 Ramsdell Quarry Landfill

Solid waste and ACM were observed at the quarry bottom during an inspection conducted when the water level in the pond was low. The waste and ACM are uncapped and may result in environmental impact and human exposure.

6.6.6 Restoration Advisory Board

Tom Tadsen, RVAAP RAB Co-Chair, indicated that the surrounding communities are concerned about potential contamination leaving the installation (Camp Ravenna) via groundwater. The communities have also expressed concerns about perceived increased cancer incidences, and the establishment and enforcement of LUCs at Camp Ravenna. He suggested that OHARNG provide an update regarding intended range (Winklepeck Burning Grounds) modifications, environmental considerations, and any potential problems. Infrequent instances of trespassing and vandalism have occurred at Camp Ravenna.

7.0 TECHNICAL ASSESSMENT

7.1 LOAD LINES 1 THROUGH 4

7.1.1 Question A:

Is the Remedy Functioning as Intended by the Decision Document?

Yes, the remedy is functioning as intended by the Interim ROD.

The soil removal action was implemented and is complete. Closure report documentation and site observations indicate that the remedy was properly executed and satisfied the RAO.

Contaminated soil and dry sediment was removed in accordance with the Interim ROD and disposed off-site.

Analytical data for Interim ROD COCs from wells identified in the *Final Remedial Action Work Plan of Soils at Load Lines 1, 2, 3, and 4* (Shaw 2007) showed no impacts to groundwater from the remedial action. Groundwater monitoring has been conducted in accordance with a facility-wide monitoring program, which obeys the spirit of the Interim ROD.

There are no operation, maintenance, and monitoring activities associated with the soil/dry sediment remedy. Groundwater monitoring at the sites is conducted on a facility-wide basis that is not included in the Interim ROD.

There are no early indicators of potential problems. The five-year review did not identify opportunities for optimization.

7.1.2 Question B:

Are the Exposure Assumptions, Toxicity Data, Cleanup Levels, and Remedial Action Objectives Used at the Time of the Remedy Still Valid?

The exposure assumptions used at the time of the remedy are not valid. The building slabs were removed in 2008 and contaminated soil beneath and adjacent to the slabs was subsequently removed.

The toxicity data, cleanup levels, and RAO used at the time of the remedy selection are still valid. The USEPA's current recommended default exposure factor values are generally less conservative than what was used to initially assess risk and develop site-specific cleanup goals, so the basis of the exposure assessment remains protective. There have been no changes in land use since the Interim ROD was issued and exposures are not occurring at the site. No new toxicity criteria changes have occurred since the previous five-year review that would affect the protectiveness of the cleanup goals. A more complete risk assessment and toxicology evaluation is provided in Attachment 8.

No chemical-specific applicable or relevant and appropriate requirements (ARARs) were identified in the Interim ROD. Attachment 7 provides a comprehensive ARAR evaluation.

7.1.3 Question C:

Has any Other Information Come to Light That Could Call Into Question the Protectiveness of the Remedy?

Yes, information has come to light that could call into question the protectiveness of the remedy. Results of soil/dry sediment sampling conducted after the Interim ROD remedial action indicate

that soil/dry sediment contamination above the cleanup goals is present at one location on Load Line 1, one location on Load Line 2, three locations on Load Line 3, and one location on Load Line 4. Exceedances were documented for 2,4,6-TNT, RDX, benzo(a)pyrene, Aroclor-1254, and manganese.

Natural disasters have not occurred since the remedial action was conducted in 2007.

7.1.4 Summary

The remedy is functioning as intended by the Interim ROD; it was implemented and is complete. Closure report documentation and site observations indicate that the remedy was properly executed and satisfies the RAO. No impacts to groundwater from the remedial action were observed.

Additional investigations and remedial actions have been conducted since the remedy was implemented. Results of soil/dry sediment sampling conducted after the Interim ROD remedial action indicate that soil/dry sediment contamination above the cleanup goals is present. The sites are currently undergoing a FS addendum to evaluate the need for additional soil and dry sediment remediation to enable less restrictive use. These activities were not identified in Interim ROD.

The exposure assumptions used at the time of the remedy are not valid, although land use has not changed since the Interim ROD was issued and exposures are not occurring. The toxicity data, cleanup levels, and RAO used at the time of the remedy selection are still valid. No chemical-specific ARARs were identified in the Interim ROD.

No other information has come to light that could call into question the protectiveness of the remedy.

7.2 LOAD LINE 12

7.2.1 Question A:

Is the Remedy Functioning as Intended by the Decision Document?

Yes, the remedy is functioning as intended by the ROD.

The removal action was implemented and is complete. Closure report documentation and site observations indicate that the remedy was properly executed and satisfied the RAO.

Contaminated soil and dry sediment was removed in accordance with the ROD and disposed off-site.

LUCs have not been implemented. Access to the site is restricted by a perimeter fence and warning signs. OHARNG is not using the site and does not permit troop training in this area. The five-year review site inspection did not identify evidence of site use or trespass. Camp Ravenna is planning to implement LUCs at the site after additional remediation (if needed) to attain less restrictive use is completed. This is scheduled for 2017.

There are no early indicators of potential problems. The five-year review did not identify opportunities for optimization.

7.2.2 Question B:

Are the Exposure Assumptions, Toxicity Data, Cleanup Levels, and Remedial Action Objectives Used at the Time of the Remedy Still Valid?

Yes, the exposure assumptions, toxicity data, cleanup levels, and RAO used at the time of the remedy selection for soil and dry sediment are still valid. The USEPA's current recommended default exposure factor values are generally less conservative than what was used to initially assess risk and develop site-specific cleanup goals. The basis of the exposure assessment used to develop site cleanup goals remains protective. There have been no changes in the exposure pathways and land use since the ROD was issued and exposures are not currently occurring at the site. No new toxicity criteria changes have occurred since the previous five-year review that would affect the protectiveness of the cleanup goals. A more complete risk assessment and toxicology evaluation is provided in Attachment 8.

No chemical-specific ARARs were identified in the ROD. Attachment 7 provides a comprehensive ARAR evaluation.

7.2.3 Question C:

Has any Other Information Come to Light That Could Call Into Question the Protectiveness of the Remedy?

No other information has come to light that could call into question the protectiveness of the remedy. Additional characterization of wet sediment and surface water indicated that there are no COCs that pose an unacceptable risk to human health or the environment in these media at this site. The Phase III RIR determined that quantitative ecological cleanup goals were not required (SAIC 2012a). Natural disasters have not occurred since the remedial action was conducted in 2010.

7.2.4 Summary

The remedy is functioning as intended by the ROD; it was implemented and is complete. Closure report documentation and site observations indicate that the remedy was properly executed and satisfies the RAO. Additional investigations have been conducted since the remedy was implemented. These activities were not identified in the ROD.

There is no unacceptable risk and the remedy remains protective of human health and the environment. The exposure assumptions, toxicity data, cleanup levels, and RAO used at the time of the remedy selection are still valid. There have been no changes in toxicity criteria or potential exposures to soil COCs since the cleanup goals were presented in the ROD. The soil/dry sediment risk-based cleanup goals are protective for a National Guard Trainee to a depth of 4 ft bgs. The site has not changed since the remedy was implemented; it is not being used and unauthorized access is prevented by a perimeter fence. No chemical-specific ARARs were identified in the Interim ROD.

No other information has come to light that could call into question the protectiveness of the remedy.

7.3 WINKLEPECK BURNING GROUNDS

7.3.1 Question A:

Is the Remedy Functioning as Intended by the Decision Document?

Yes, the remedy is functioning as intended by the ROD.

The removal action was implemented and is complete. Closure report documentation and site observations indicate that the remedy was properly executed and satisfies the RAO. An ESD

was prepared to enable use of the site as a Multi-Purpose Machine Gun range. The ESD remedy has not been completed.

LUCs have been implemented in accordance with the ROD. Quarterly monitoring and inspections have documented that LUC awareness training, access restrictions, and land uses are being performed/maintained consistent with the ROD. The five-year review site inspection did not identify any unauthorized uses of the site.

There are no early indicators of potential problems. Opportunities for optimization were not identified.

7.3.2 Question B:

Are the Exposure Assumptions, Toxicity Data, Cleanup Levels, and Remedial Action Objectives Used at the Time of the Remedy Still Valid?

Yes, the exposure assumptions, toxicity data, cleanup levels, and RAOs used at the time of the remedy selection (2008 ROD and 2015 ESD) are still valid. There have been no changes in land use and no new exposure pathways since the ESD. A more complete risk assessment and toxicology evaluation is provided in Attachment 8.

No chemical-specific ARARs were identified in the ROD or ESD. Attachment 7 provides a comprehensive ARAR evaluation.

7.3.3 Question C:

Has any Other Information Come to Light That Could Call Into Question the Protectiveness of the Remedy?

No other information has come to light that could call into question the protectiveness of the remedy. The ROD indicated that mitigation of risks to ecological receptors will be achieved through remediation to protect a range maintenance soldier. Natural disasters have not occurred since the remedial action was implemented in 2008 and 2009.

7.3.4 Summary

The remedy is functioning as intended by the ROD; it was implemented and is complete. Closure report documentation and site observations indicate that the remedy was properly executed and satisfies the RAO. Quarterly monitoring indicates that the LUCs have been implemented and are maintained consistent with the ROD. An ESD was prepared to enable use of the site as a Multi-Purpose Machine Gun Range.

There is no unacceptable risk and the remedy remains protective of human health and the environment. The exposure assumptions, toxicity data, cleanup levels, and RAO used at the time of the remedy selection are still valid. There have been no changes in toxicity criteria or potential exposures to soil COCs since the cleanup goals were presented in the ROD. The soil/dry sediment risk-based cleanup goals are protective for a National Guard Trainee to a depth of 4 ft bgs. Additional removal actions identified in the ESD will remediate COCs exceeding USEPA commercial/industrial risk-based screening levels. This remedial action is currently ongoing.

No other information has come to light that would call into question the protectiveness of the remedy.

7.4 RAMSDELL QUARRY LANDFILL

7.4.1 Question A:

Is the Remedy Functioning as Intended by the Decision Document?

Yes, the remedy is functioning as intended by the ROD and ROD amendment.

The removal action was implemented and is complete. Closure report documentation indicates that the soil removal action was partially executed and terminated due to the presence of friable ACM in the subsurface. A perimeter fence with warning signs was installed and surficial ACM was removed by non-intrusive/no-digging methods. The RAOs identified in the ROD and ROD amendment have been attained.

According to Ohio EPA, solid waste and ACM were observed at the quarry bottom during an inspection conducted when the water level in the pond was low. This five-year review has determined that the perimeter fence and LUCs protect human receptors from any remaining COCs in soil above site cleanup goals and residual asbestos by restricting access to the area.

LUCs have been implemented in accordance with the ROD. The first annual inspection has documented that LUC training, access restrictions, and land uses are being performed/maintained consistent with the ROD. The LUCs have not been officially incorporated into the PMP, although this will be completed in the next version of the PMP. The five-year review site inspection did not identify any unauthorized uses of the site.

7.4.2 Question B:

Are the Exposure Assumptions, Toxicity Data, Cleanup Levels, and Remedial Action Objectives Used at the Time of the Remedy Still Valid?

Yes, the RAOs identified in the ROD and ROD amendment were established to eliminate exposure to site contaminants. Fencing was installed, LUCs were implemented, and training activities are not allowed on the site. There have been no changes in land use or exposure pathways since these decision documents were issued. The RAOs used at the time of remedy selection are still valid and functioning to eliminate the exposure that could lead to unacceptable risks. A more complete risk assessment and toxicology evaluation is provided in Attachment 8.

7.4.3 Question C:

Has any Other Information Come to Light That Could Call Into Question the Protectiveness of the Remedy?

No other information has come to light that would call into question the protectiveness of the remedy. The ROD indicated that remediation to meet human health cleanup goals will reduce the overall contaminant concentrations and ecological risk. Natural disasters have not occurred since the remedial actions were implemented in 2010 and 2014.

7.4.4 Summary

The remedy is functioning as intended by the ROD and ROD amendment; it is complete. Closure report documentation and site observations indicate that they satisfy the RAOs. Annual LUC inspection indicates that training, access restrictions, and land uses are consistent with ROD requirements.

1680 **8.0 ISSUES**

1681 Table 12 summarizes issues that affect protectiveness for sites evaluated in this five-year review.

Table 12 Current Issues for the Camp Ravenna Sites That Affect Protectiveness

Issue	Affects Current Protectiveness (Yes or No)	Affects Future Protectiveness (Yes or No)
Contaminated soils and dry sediment are present above site cleanup goals at Load Lines 1 - 4 and may be accessible to installation personnel during future military training activities	No	Yes

1682 **9.0 RECOMMENDATIONS AND FOLLOW-UP ACTIONS**

1683 Table 13 provides recommendations to address issues that affect protectiveness at Camp
1684 Ravenna sites evaluated in this five-year review.

Table 13 Recommendations to Address Issues That Affect Protectiveness at Camp Ravenna Sites

Issue	Recommendations/Follow-up Actions	Party Responsible	Oversight Agency	Milestone Date	Affects Protectiveness?	
					Current	Future
1	Determine if unacceptable risk associated with remaining contaminated soils at Load Lines 1 - 4 exists and remediate in a manner consistent with the Interim ROD, if necessary to mitigate risk.	Camp Ravenna/ NGB	Ohio EPA	September 2017	No	Yes

1685 Table 14 provides recommendations to address concerns that do not affect protectiveness at
1686 Camp Ravenna sites evaluated in this five-year review.

Table 14 Recommendations for Concerns That Do Not Affect Protectiveness at Camp Ravenna Sites

Concern	Recommendations/ Follow-up Actions	Party Responsible
<i>Load Line 12</i>		
LUCs have not been implemented in accordance with the ROD	Incorporate LUCs into the PMP and fully implement them after actions to achieve residential or commercial/industrial use of the site are achieved. In the interim, do not use the site or provide access to the site for activities other than environmental monitoring and remediation.	Camp Ravenna/NGB
<i>Ramsdell Quarry Landfill</i>		
LUCs have not been incorporated into the PMP	Incorporate LUCs into the PMP.	Camp Ravenna/NGB

10.0 PROTECTIVENESS STATEMENTS

10.1 LOAD LINES 1 THROUGH 4

The remedy at Load Lines 1 - 4 currently protects human health and the environment because:

- Contaminated soil/dry sediment identified in the Interim ROD was remediated

However, in order for the remedy to be protective in the long-term, the following action needs to be taken to ensure protectiveness:

- Determine if unacceptable risk associated with remaining contaminated soils at Load Lines 1 - 4 exists and remediate in a manner consistent with the Interim ROD, if necessary to mitigate risk

10.2 LOAD LINE 12

The remedy at Load Line 12 is protective of human health and the environment because:

- Contaminated soil/dry sediment identified in the ROD was remediated
- The site is not being used and access is restricted by a perimeter fence with warning signs

10.3 WINKLEPECK BURNING GROUNDS

The remedy at Winklepeck Burning Grounds is protective of human health and the environment because:

- Contaminated soil/dry sediment identified in the ROD was remediated
- LUCs have been implemented; they are being employed and maintained in accordance with the ROD

10.4 RAMSDELL QUARRY LANDFILL

The remedy at Ramsdell Quarry Landfill is protective of human health and the environment because:


- Contaminated soil/dry sediment was partially remediated
- A perimeter fence with warning signs was installed and surficial ACM was removed by non-intrusive/no-digging methods in accordance with the ROD amendment
- LUCs have been implemented; training, access restrictions, and land uses are being performed/maintained consistent with the ROD



1714 **11.0 NEXT REVIEW**


1715 The next five-year review of Camp Ravenna sites addressed in this report will be conducted by
1716 August 31, 2022.

ATTACHMENT 1

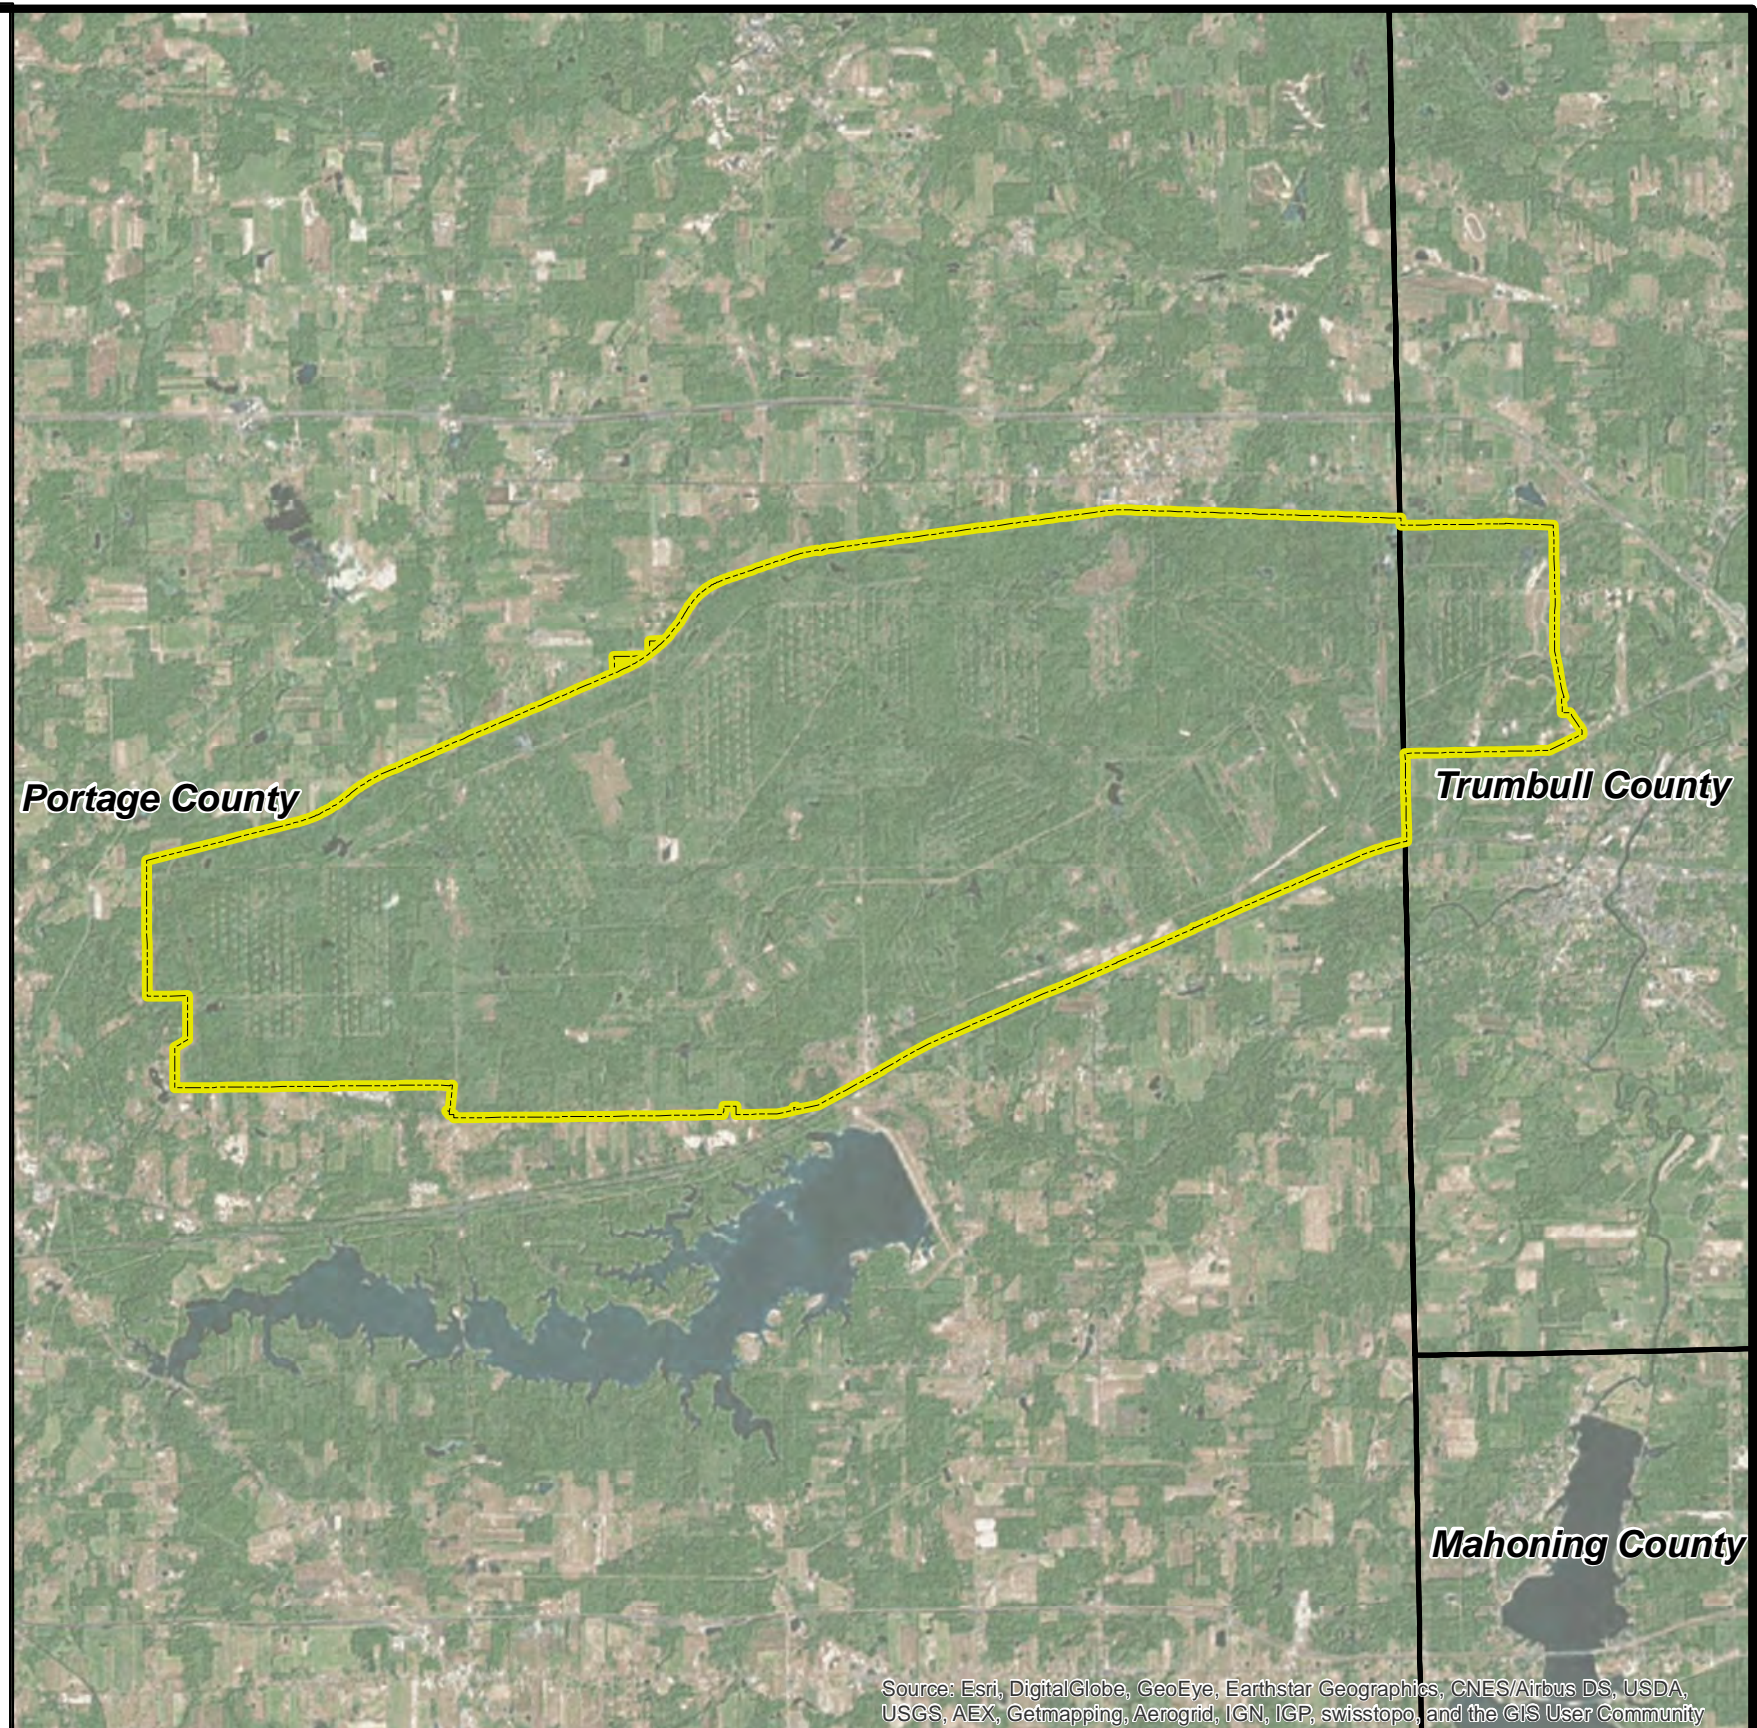Figures



-  Camp Ravenna Boundary
-  CountyBoundary






Document Name: RVAAP_Site_FIG_1.mxd
 Drawn By: H5TDEEMP
 Date Saved: 27 Oct 2016
 Time Saved: 1:57:26 PM


Camp Ravenna Site Location


Camp Ravenna
 Portage and Trumbull
 Counties, Ohio

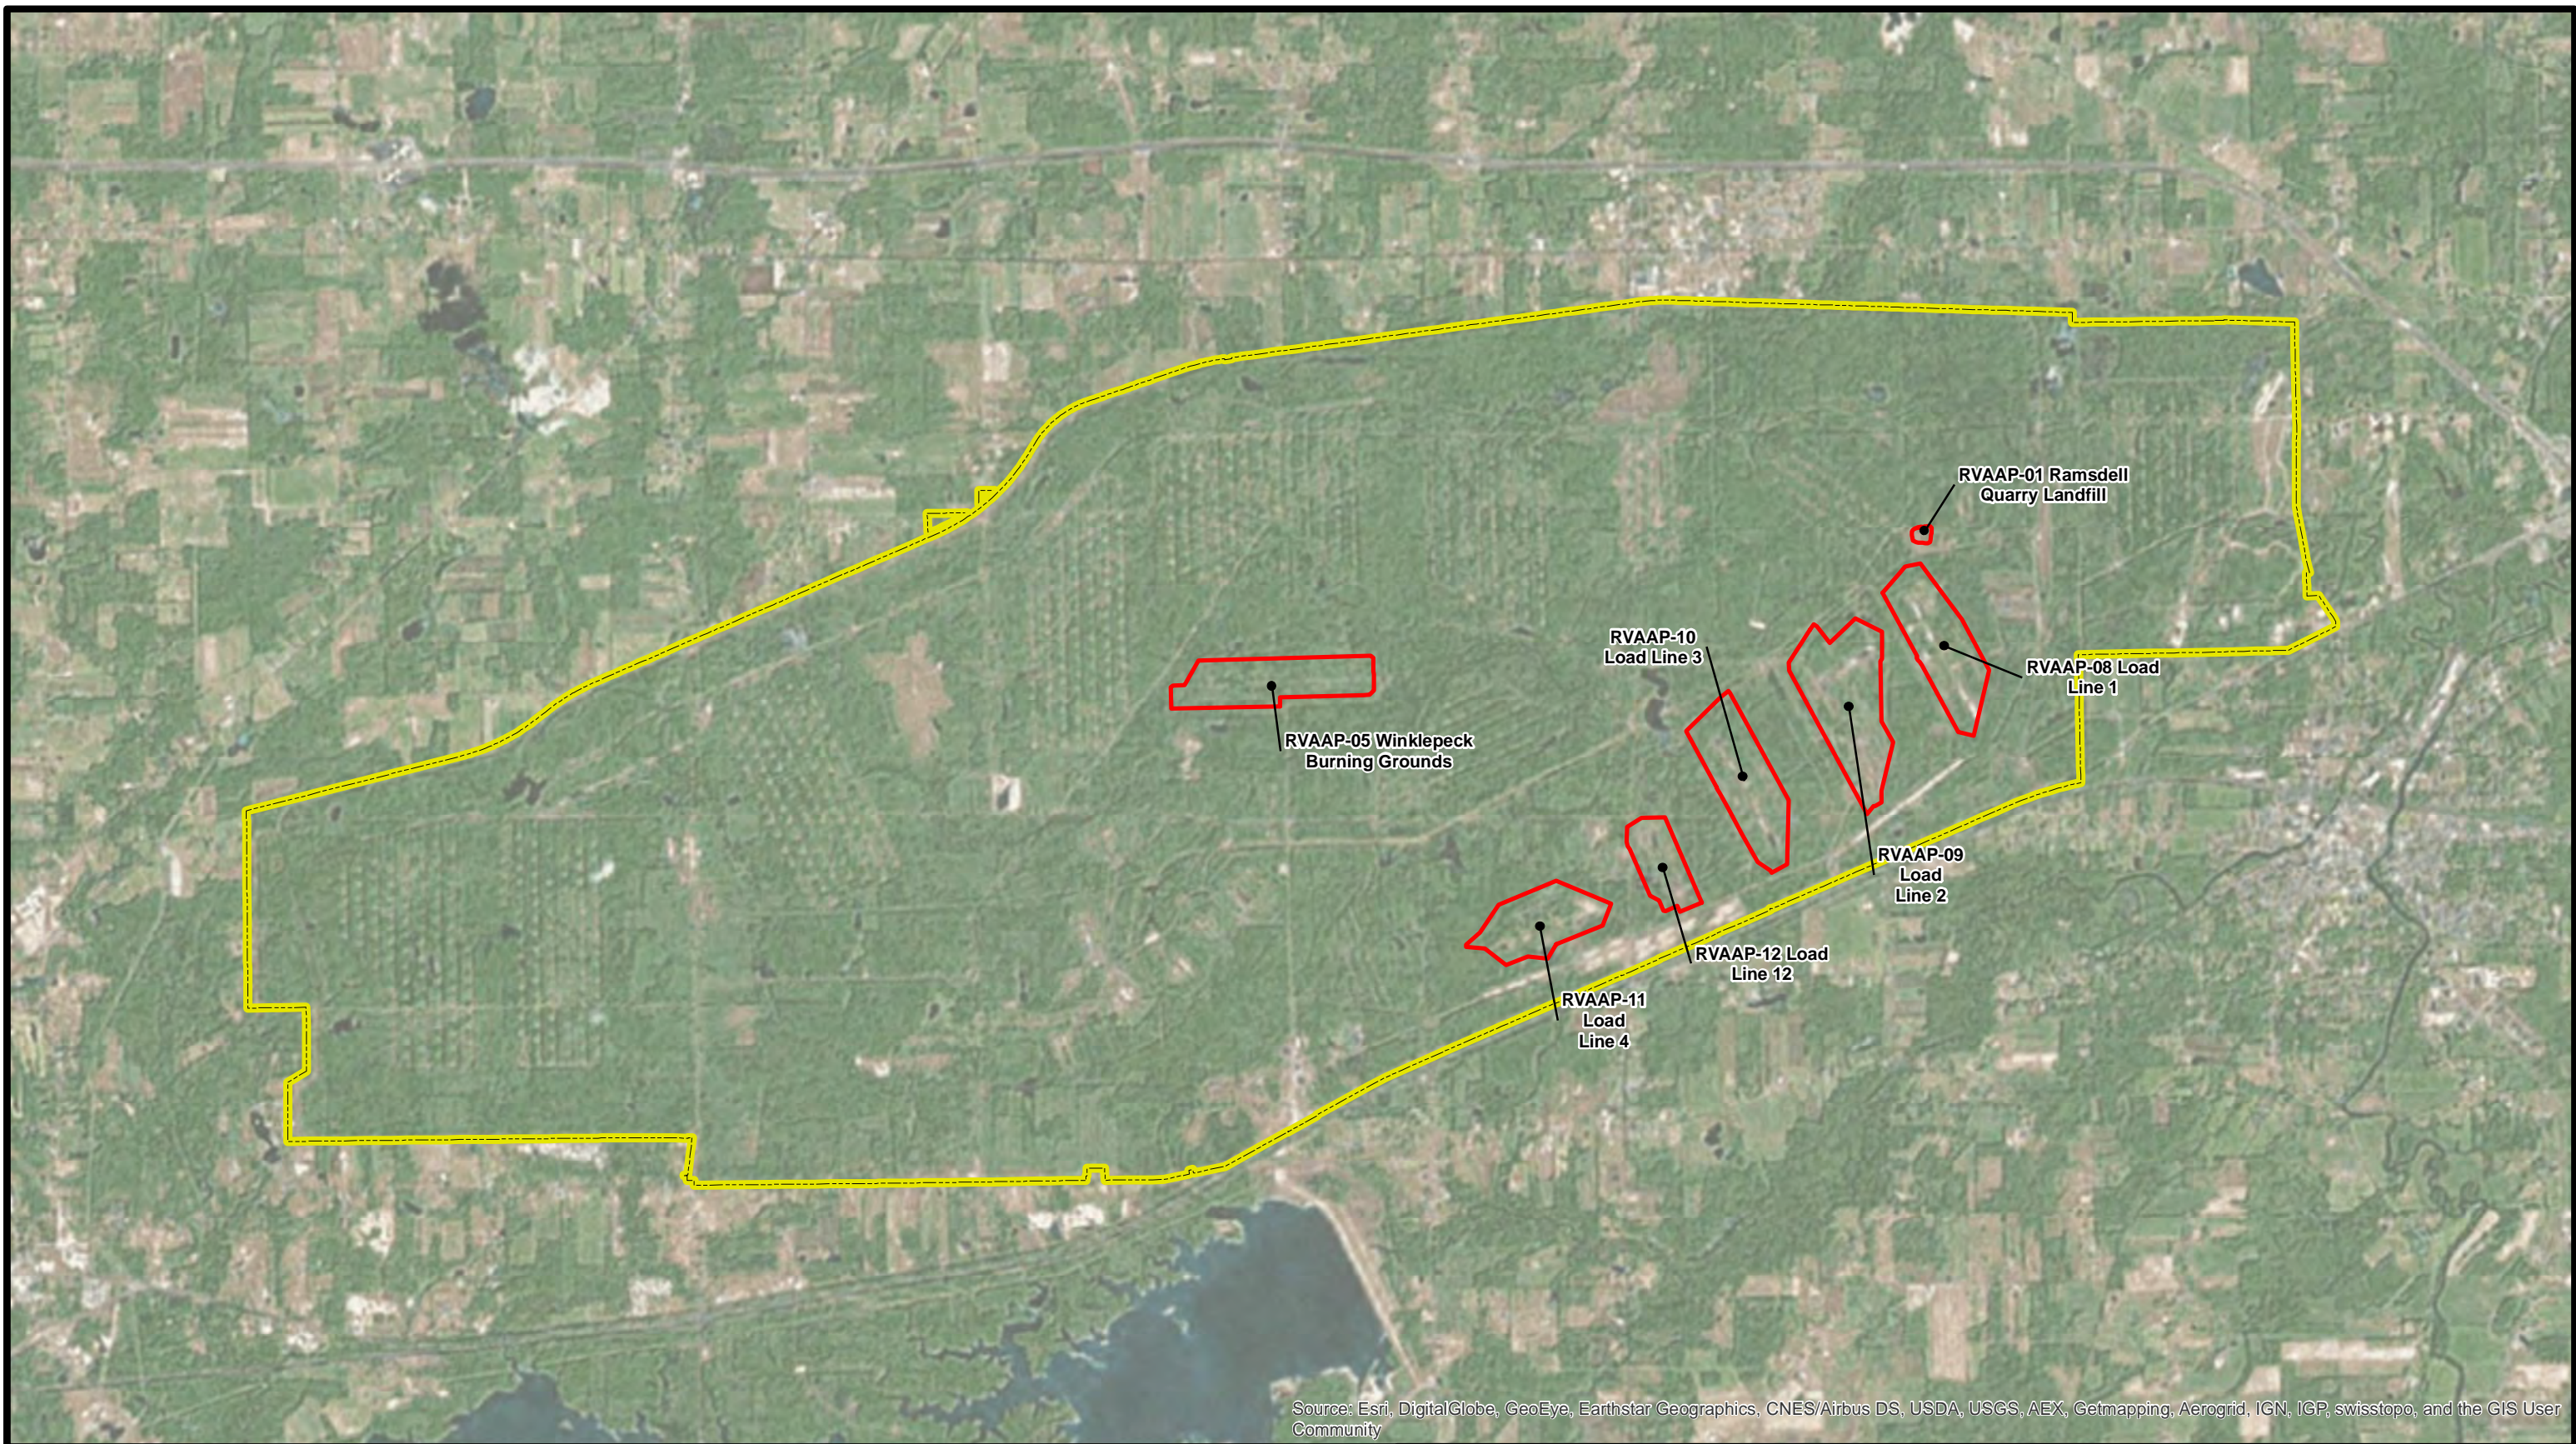Figure 1



-  Camp Ravenna Boundary
-  Area of Concern

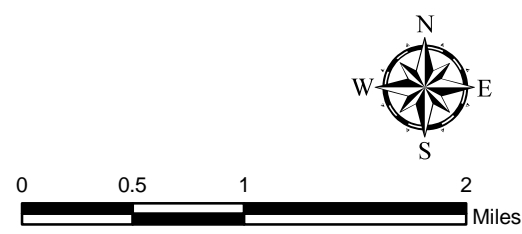


 US Army Corps
 of Engineers
 Buffalo District

Document Name: RVAAP_AOC_FIG_2.mxd
 Drawn By: H5TDEEMP
 Date Saved: 31 Oct 2016
 Time Saved: 10:22:06 AM

Areas of Concern Evaluated in Five-Year Review


Camp Ravenna
 Portage and Trumbull
 Counties, Ohio

Figure 2



Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- | | |
|---|--|
| Monitoring Well | Excavation Area |
| Monitoring Well (Identified in Interim ROD) | Excavation Area (2010 - Not Included in Interim ROD) |
| Fence Line | Area of Concern |
| Former Railroad | Former Building/Structure |
| Roads | |




Document Name: LL_1_FIG_3.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 10:36:31 AM

Load Line #1	
Camp Ravenna Portage and Trumbull Counties, Ohio	Figure 3



- | | | | |
|--|---|--|--|
| | Monitoring Well | | Excavation Area |
| | Monitoring Well (Identified in Interim ROD) | | Excavation Area (2010 - Not Included in Interim ROD) |
| | Fence Line | | Area of Concern |
| | Former Railroad | | Former Building/Structure |
| | Roads | | |

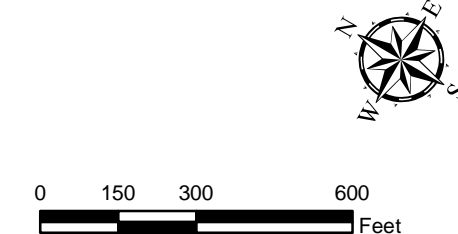

US Army Corps
of Engineers
Buffalo District


Document Name: LL_2_FIG_4.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 10:45:34 AM

Load Line #2	
Camp Ravenna Portage and Trumbull Counties, Ohio	Figure 4



Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- | | |
|---|--|
| Monitoring Well | Excavation Area |
| Monitoring Well (Identified in Interim ROD) | Excavation Area (2010 - Not included in Interim ROD) |
| Fence Line | Area of Concern |
| Former Railroad | Former Building/Structure |
| Roads | |

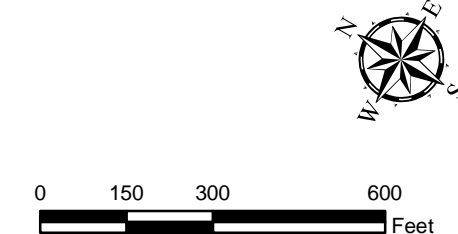

US Army Corps of Engineers
Buffalo District


Document Name: LL_3_FIG_5.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 10:57:03 AM

Load Line #3	
Camp Ravenna Portage and Trumbull Counties, Ohio	Figure 5





Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- | | |
|---|--|
| Monitoring Well | Excavation Area |
| Monitoring Well (Identified in Interim ROD) | Soil Stockpile Area (2010 - Not Included in Interim ROD) |
| Fence Line | Area of Concern |
| Former Railroad | Former Building/Structure |
| Roads | |

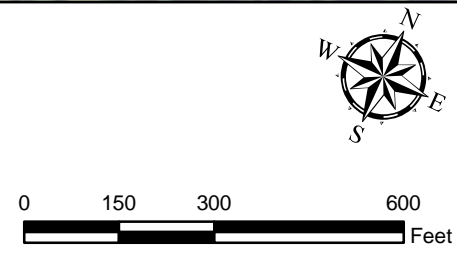


Document Name: LL_4_FIG_6.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 11:13:17 AM

Load Line #4	
Camp Ravenna Portage and Trumbull Counties, Ohio	Figure 6




Load Line #12

Figure 7

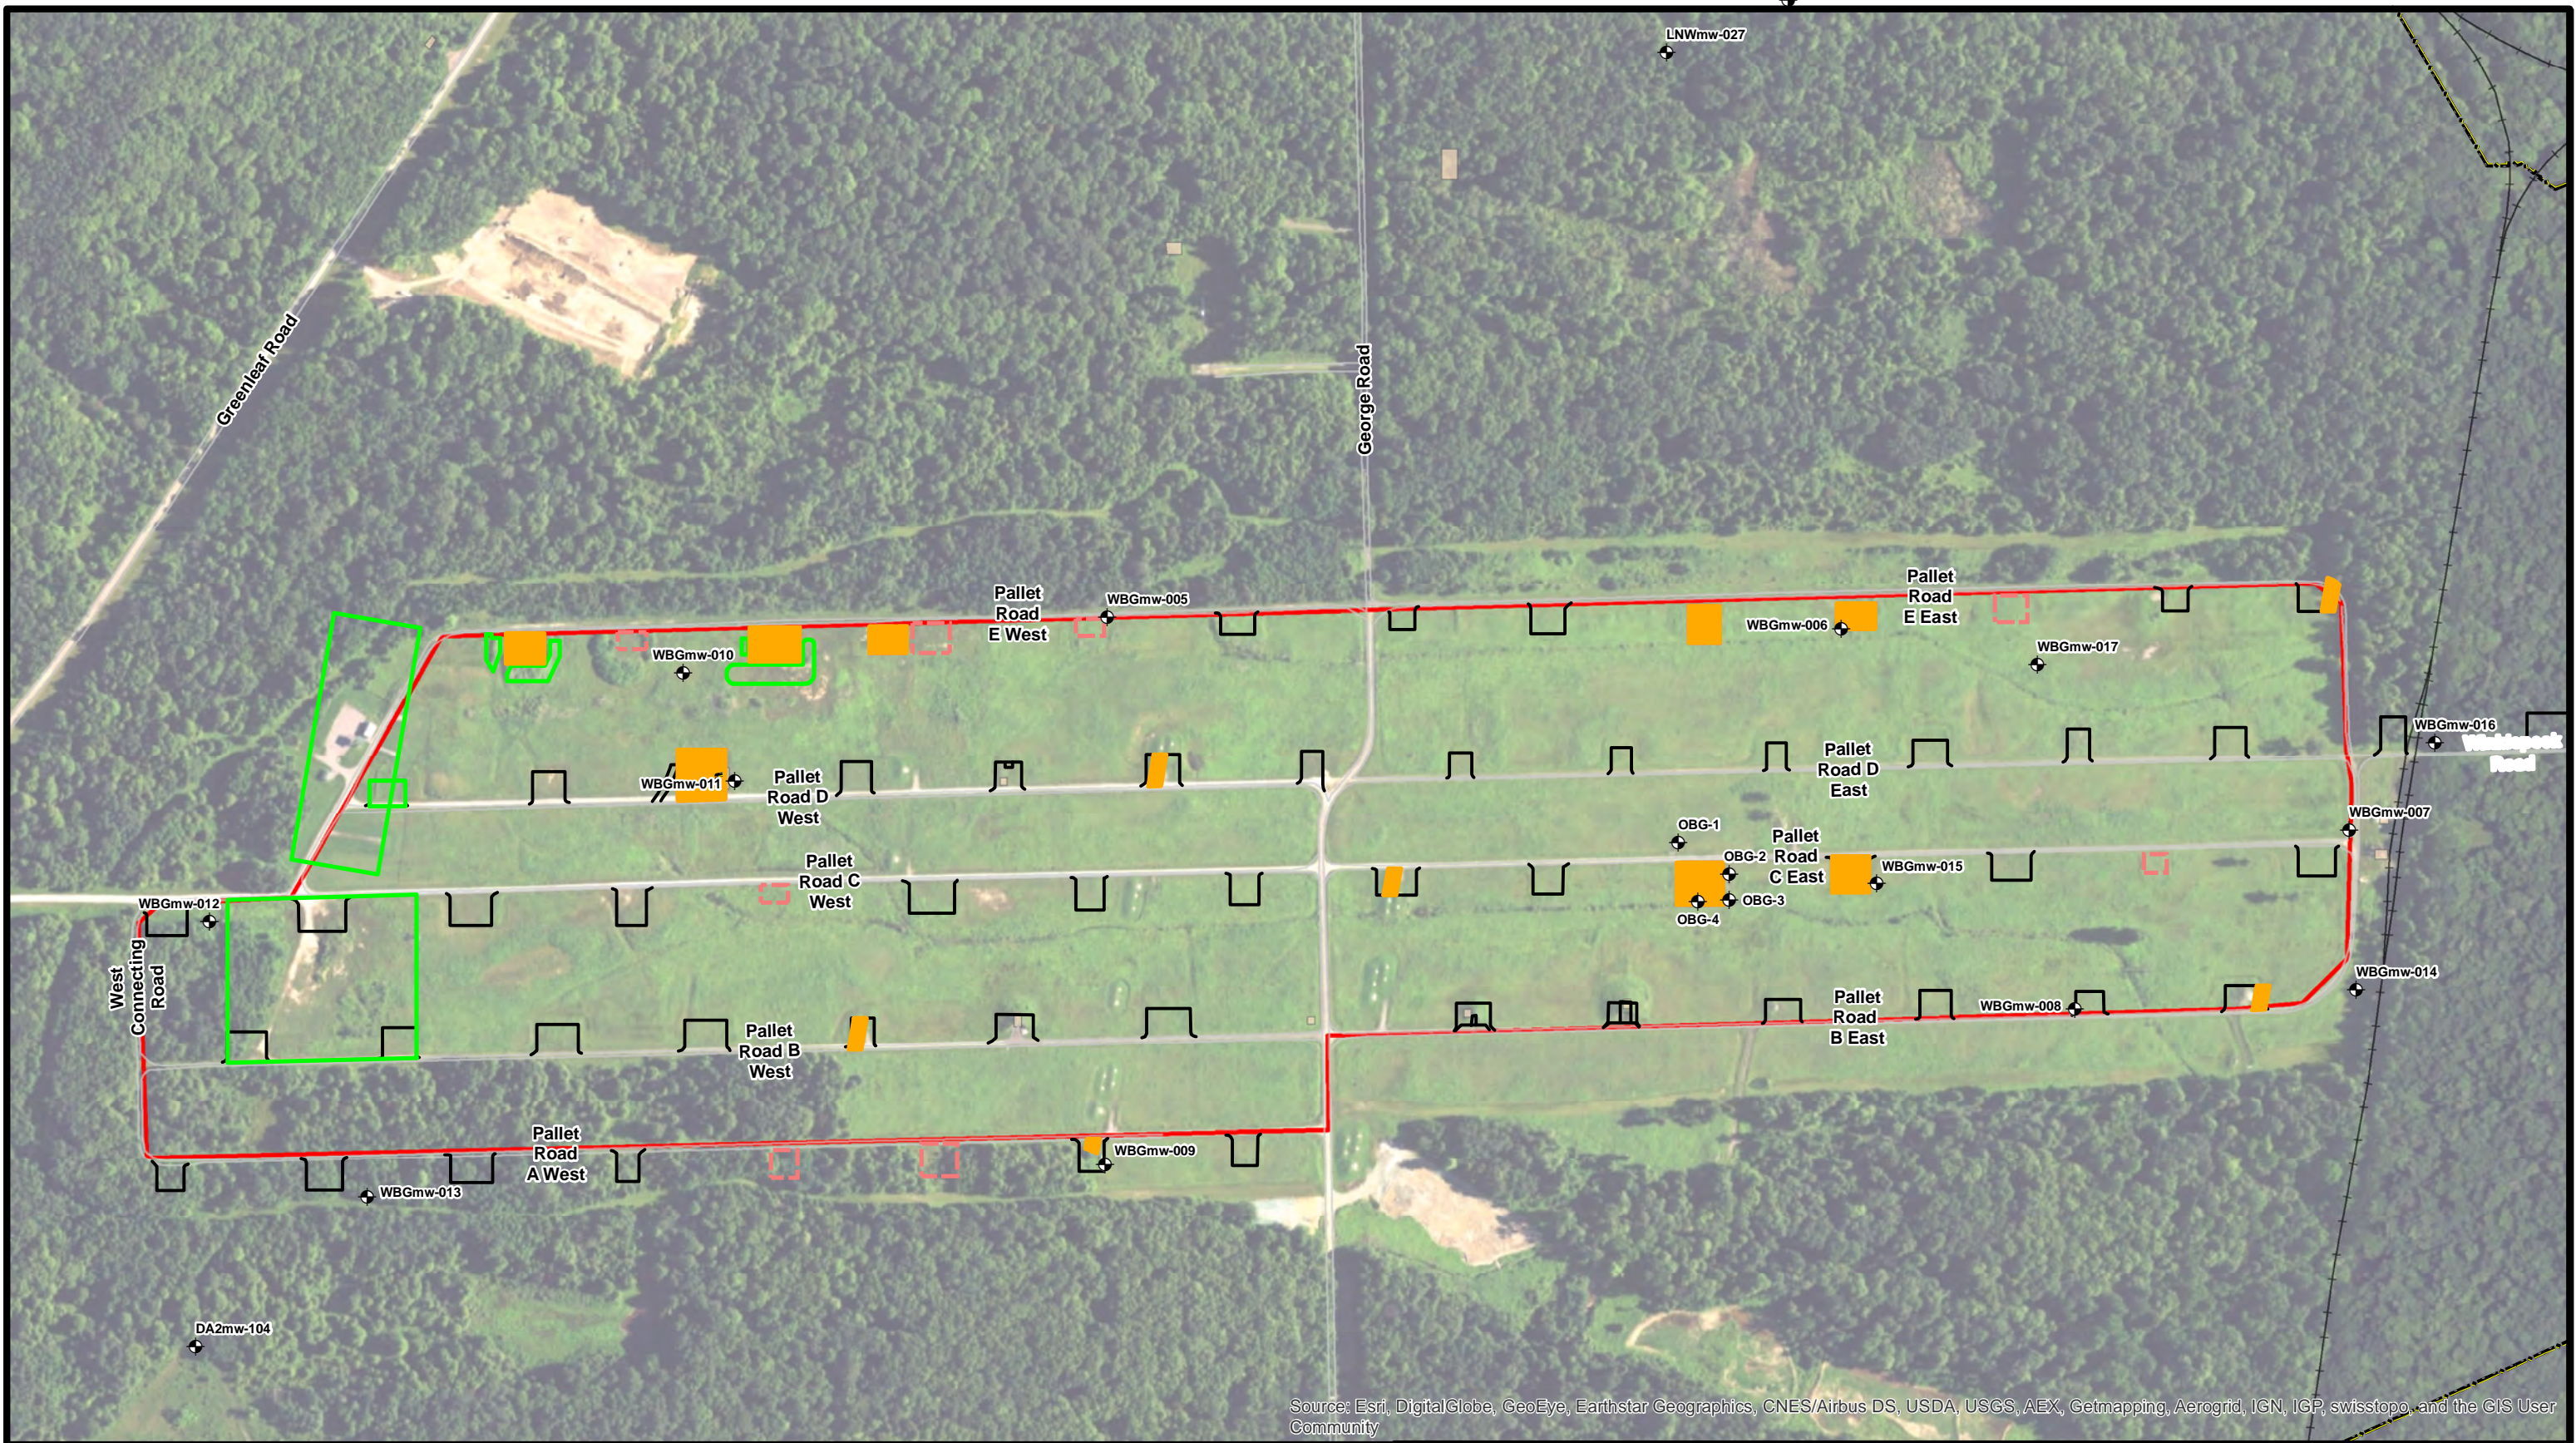

- | | |
|------------------------|---|
| Monitoring Well | Former Burn Pad Scheduled for MEC Removal and Environmental Remediation |
| Fence Line | Area Cleared of MEC to 1ft BGS |
| Former Railroad | Excavation Area |
| Roads | Area of Concern |
| Former Burn Pad | Former Building/Structure |
| Surface Cleared of MEC | |

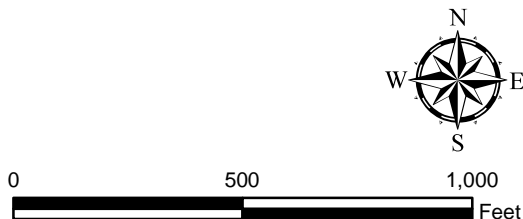


Document Name: WPBG_FIG_8.mxd
Drawn By: H5TDEEMP
Date Saved: 01 Nov 2016
Time Saved: 9:55:19 AM

Winklepeck Burning Grounds

Camp Ravenna
Portage and Trumbull
Counties, Ohio

Figure 8

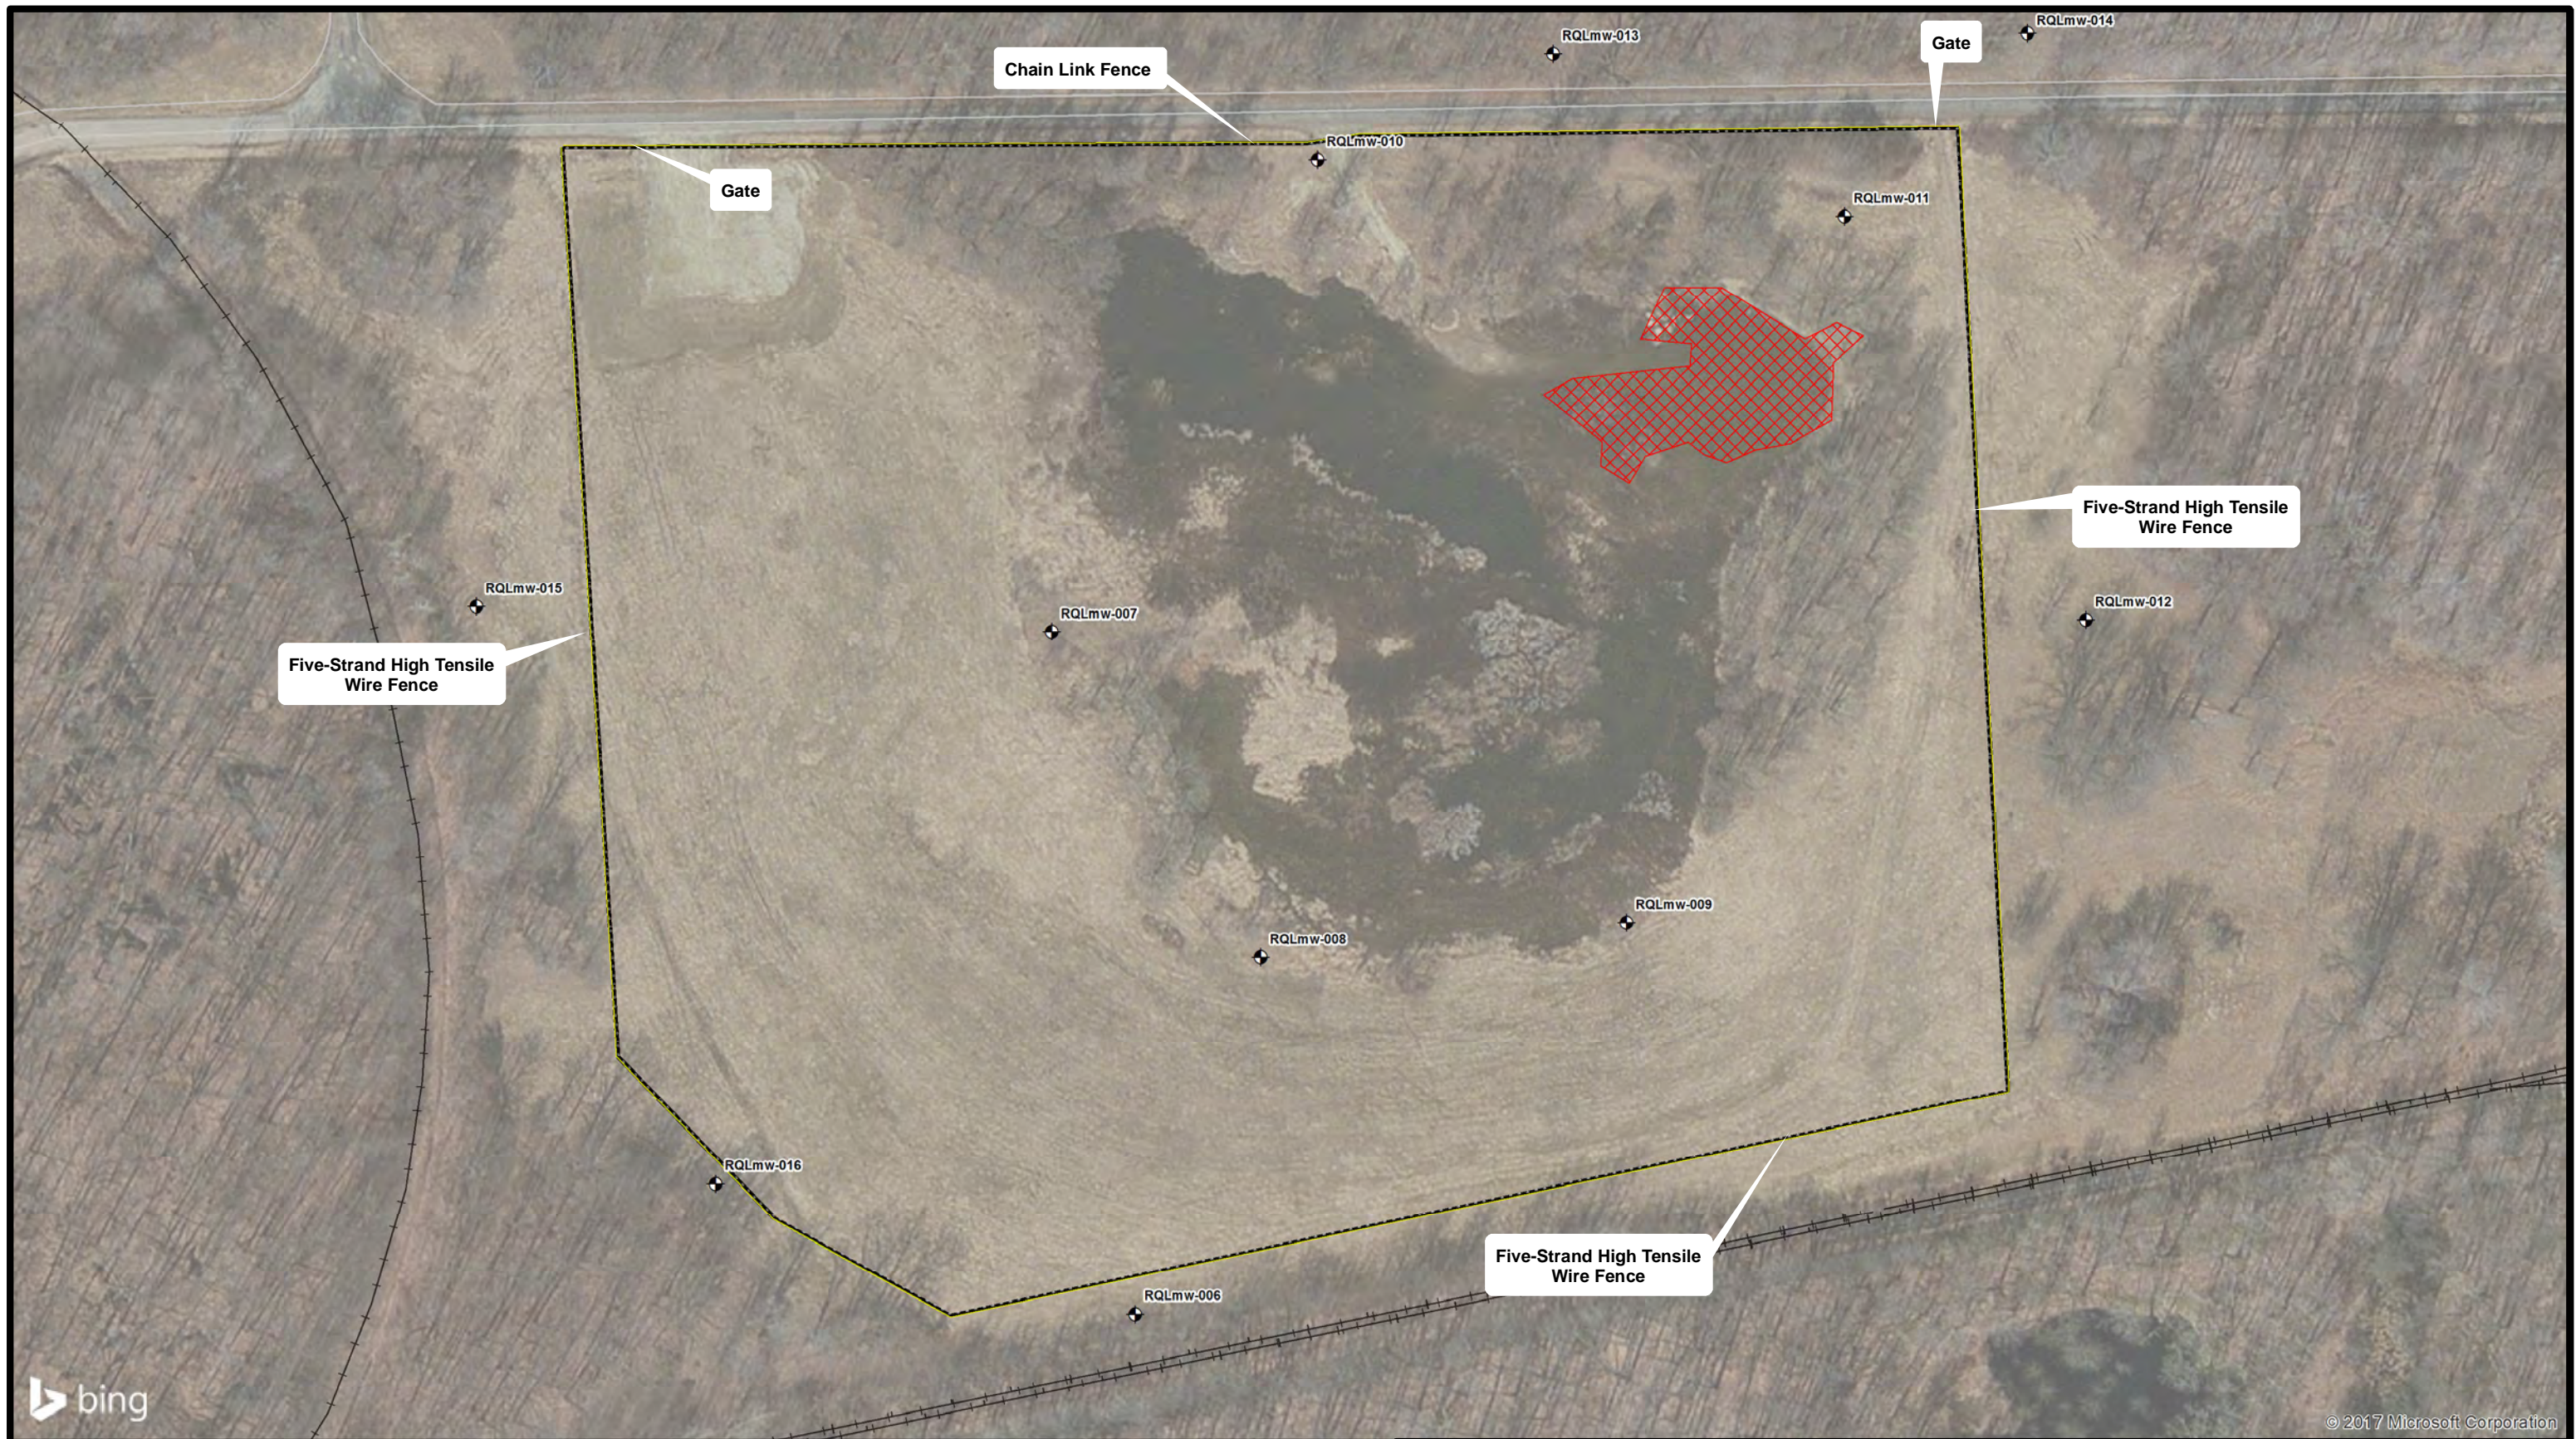

<div data-bbox="124 1713 1693 1951"><p>Monitoring Well Roads</p><p>Fence Line Excavation Area</p><p>Railroads</p><div data-bbox="1165 1874 1662 1935"><p>0 125 250</p><p>Feet</p></div></div>	<div data-bbox="1724 1723 1849 1824"></div> <p>Document Name: RQL_FIG_9.mxd Drawn By: HSTDEEMP Date Saved: 27 Feb 2017 Time Saved: 6:10:25 AM</p>	<div data-bbox="2408 1733 2750 1784"><p>Ramsdell Quarry Landfill</p></div> <div data-bbox="2284 1844 2533 1945"><p>Camp Ravenna Portage and Trumbull Counties, Ohio</p></div> <div data-bbox="2812 1874 2937 1915"><p>Figure 9</p></div>	
---	---	--	--

ATTACHMENT 2
Documents Reviewed

DOCUMENTS REVIEWED

- Alliant Corporation (Alliant) 2015. *Draft Work Plan for a Pilot Study and Feasibility Study at Atlas Scrap Yard*. October 14
- Army National Guard (ARNG) 2015. Memorandum for Administrative File: *Finalization of "Summary of the Findings of the Historical Review and Risk Evaluation of the Storage Magazines and Appended Information Paper for the Former Ravenna Army Ammunition Plant, Dated January 29, 2015."* June 30
- ARNG 2016. *FY2015 Ravenna Army Ammunition Plant Army Defense Environmental Restoration Program Installation Action Plan*. March
- CB&I Federal Services LLC (CB&I) 2014a. *Final Remedial Investigation Report for RVAAP-002-R-01 Erie Burning Grounds MRS*. August 27
- CB&I 2014b. *Final Remedial Investigation Report for RVAAP-050-R-01 Atlas Scrap Yard MRS*. August 25
- CB&I 2014c. *Final Remedial Investigation Report for RVAAP-008-R-01 Load Line #1A MRS*. August 28
- CB&I 2015a. *Final Remedial Investigation Report for RVAAP-001-R-01 Ramsdell Quarry Landfill MRS*. January 27
- CB&I 2015b. *Final Remedial Investigation Report for RVAAP-004-R-01 Open Demolition Area #2 MRS*. February 27
- CB&I 2015c. *Final Remedial Investigation Report for RVAAP-019-R-01 Landfill North of Winklepeck MRS and RVAAP-060-R-01 Block D Igloo MRS*. March 4
- CB&I 2015d. *Final Remedial Investigation Report for RVAAP-032-R-01 40mm Firing Range MRS*. April 30
- CB&I 2015e. *Final Remedial Investigation Report for RVAAP-063-R-01 Group 8 MRS*. May 19
- CB&I 2015f. *Final Remedial Investigation Report for RVAAP-016-R-01 Fuze and Booster Quarry MRS*. June 5
- CB&I 2015g. *Final No Further Action Record of Decision for RVAAP-008-R-01 Load Line #1A Munitions Response Site*. August 14
- CB&I 2015h. *Final No Further Action Record of Decision for RVAAP-033-R-01 Firestone Test Facility Munitions Response Site*. August 14

- 31 CB&I 2015i. *Final No Further Action Record of Decision for RVAAP-034-R-01 Sand Creek*
32 *Dump Munitions Response Site.* September 29
- 33 CB&I 2015j. *Final No Further Action Record of Decision for RVAAP-062-R-01 Water Works*
34 *#4 Dump Munitions Response Site.* September 29
- 35 Department of the Army 2016. Memorandum for Department of Defense Explosives Safety
36 Board (DDESB-PE/Ms Bige), subject: *Request DDESB Acknowledgement of No Further Action*
37 *(NOFA) Explosives Safety Submission (ESS) Military Munitions response Program for Load*
38 *Line #1A, Military Munitions Response Site (MRS) RVAAP-008-R-01, Ravenna Army*
39 *Ammunition Plant, Ohio, March 2016, UISATCES MEC File Number 1474.* March 15
- 40 Department of the Army Base Realignment and Closure Division (BRACD) 2008. Letter to
41 Bonnie Buthker, Ohio EPA. January 7
- 42 Department of the Army National Guard Bureau (NGB) 2014. Memorandum for Nancy
43 Zikmanis Environmental Supervisor, Ohio Environmental Protection Agency (Ohio EPA),
44 DERR-NEDO, Northeast District Office, 2110 East Aurora Road, Twinsburg, Ohio 44087:
45 *FINAL TECHNICAL MEMORANDUM: Land Uses and Revised Risk Assessment Process for the*
46 *Ravenna Army Ammunition Plant (RVAAP) Installation Restoration Program, Portage/Trumbull*
47 *Counties, Ohio.* February 4
- 48 Department of Defense (DoD) 2012. *Department of Defense Manual Number 4715.20, Defense*
49 *Environmental Restoration Program (DERP) Management.* March 9
- 50 DoD 2014. Memorandum to Assistant Secretary of the Army, *Five-Year Review Procedures –*
51 *Update to DoD Manual (DoDM) 4715.20, “Defense Environmental Restoration Program*
52 *(DERP) Management,” March 9, 2012.* June
- 53 Environmental Chemical Corporation (ECC) 2015a. *Final Site Inspection Report CC RVAAP-77*
54 *Building 1037 Laundry Waste Water Sump.* February 11
- 55 ECC 2015b. *Final Site Inspection Report CC RVAAP-71 Barn No. 5 Petroleum Release.*
56 February 12
- 57 ECC 2015c. *Final Site Inspection Report CC RVAAP-83 Former Buildings 1031 and 1039.*
58 June 15
- 59 ECC 2015d. *Final Site Inspection Report CC RVAAP-72 Facility-Wide Underground Storage*
60 *Tanks.* July 8
- 61 ECC 2015e. *Draft Site Inspection Report CC RVAAP-70 East Classification Yard.* July 21

- 62 ECC 2016. *Final Site inspection Report CC RVAAP-75 George Road Sewage Treatment Plant.*
63 January 29
- 64 ECC and AMEC Environment and Infrastructure, Inc. (AMEC) 2013. *Draft Remedial*
65 *Investigation/Feasibility Study CC RVAAP-76.* June 17
- 66 ECC and AMEC 2014a. *Preliminary Draft Remedial Investigation CC RVAAP-79 DLA Ore*
67 *Storage Sites –Main Storage Area.* April 11
- 68 ECC and AMEC 2014b. *Preliminary Draft Remedial Investigation CC RVAAP-79 DLA Ore*
69 *Storage Sites – Remaining Ore Sites.* April 25
- 70 ECC and AMEC 2015. *Draft Remedial Investigation Report CC RVAAP-74 Building 1034*
71 *Motor Pool Hydraulic Lift.* March 6
- 72 ECC and AMEC 2015. *Draft Remedial Investigation Report CC RVAAP-73 Facility-Wide Coal*
73 *Storage.* August 18
- 74 Environmental Consulting and Training Services, Inc. and NewFields 2008. *Ravenna Army*
75 *Ammunition Plant Facility-Wide Groundwater Monitoring Program Background Calculation*
76 *Update Final Report Ravenna Army Ammunition Plant, Ravenna, Ohio.* October
- 77 Environmental Quality Management, Inc. (EQM) 2008. *Final Facility-Wide Groundwater*
78 *Monitoring Program Annual Report for 2007 Ravenna Army Ammunition Plant, Ravenna, Ohio.*
79 March
- 80 EQM 2009. *Final Facility-Wide Groundwater Monitoring Program Annual Report for 2008*
81 *Ravenna Army Ammunition Plant, Ravenna, Ohio.* March
- 82 EQM 2010a. *Final Facility-Wide Groundwater Monitoring Program Annual Report for 2009*
83 *Ravenna Army Ammunition Plant, Ravenna, Ohio.* March
- 84 EQM 2010b. *Final Work Plan for the Geochemical Evaluation of Metals in Groundwater at*
85 *Ravenna Army Ammunition Plant, Ravenna, Ohio, Revision 1.0.* March
- 86 EQM 2011a. *Final Facility-Wide Groundwater Monitoring Program Annual Report for 2011.*
87 February 23
- 88 EQM 2011b. *Final Facility-Wide Groundwater Monitoring Program Annual Report for 2010*
89 *Ravenna Army Ammunition Plant, Ravenna, Ohio.* March 11
- 90 EQM 2011c. *Final Facility-Wide Groundwater Monitoring Program Plan RVAAP-66 Facility-*
91 *Wide Groundwater Project Management Plan.* November

- 92 EQM 2012a. *Final Facility-Wide Groundwater Monitoring Program Plan RVAAP-66 Facility-*
93 *Wide Groundwater Addendum, Ravenna Army Ammunition Plant, Ravenna, Ohio.* January
- 94 EQM 2012b. *Final Facility-Wide Groundwater Monitoring Program Plan RVAAP-66 Facility-*
95 *Wide Groundwater Semiannual Monitoring Addendum, Ravenna Army Ammunition Plant,*
96 *Ravenna, Ohio.* January
- 97 EQM 2013. *Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide*
98 *Groundwater Annual Report for 2012.* October 31
- 99 EQM 2014. *Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide*
100 *Groundwater Annual Report for 2013.* March 6
- 101 EQM 2015a. *Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide*
102 *Groundwater Annual Report for 2014.* March 30
- 103 EQM 2015b. *Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide*
104 *Groundwater Report on the March 2015 Sampling Event.* September 21
- 105 EQM 2016. *Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide*
106 *Groundwater Report on the July 2015 Sampling Event.* January 13
- 107 Leidos Engineering of Ohio, Inc. (Leidos) 2012. *Final Remedial Investigation/Feasibility Study*
108 *Report for Soil, Sediment, and Surface Water at the RVAAP-48 Anchor Test Area.* January 18
- 109 Leidos 2013. *Final Proposed Plan for Soil, Sediment, and Surface Water at RVAAP-48 Anchor*
110 *Test Area.* May 28
- 111 Leidos 2014a. *Final Record of Decision for Soil, Sediment, and Surface Water at RVAAP-48*
112 *Anchor Test Area.* March 18
- 113 Leidos 2014b. *Final Remedial Design for Soil and Dry Sediment at RVAAP-01 Ramsdell*
114 *Quarry Landfill.* April 9
- 115 Leidos 2014c. *Final Remedial Design for Soil, Sediment, and Surface Water at RVAAP-13*
116 *Building 1200 and RVAAP-48 Anchor Test Area.* August 22
- 117 Leidos 2015a. *Final Remedial Action Report for Soil and Dry Sediment at RVAAP-01 Ramsdell*
118 *Quarry Landfill.* January 30
- 119 Leidos 2015b. *Final Remedial Action Report for Soil, Sediment, and Surface Water at RVAAP-*
120 *13 Building 1200.* May 14

- 121 Leidos 2015c. *Final Remedial Investigation Report for Soil, Sediment, and Surface Water at*
122 *RVAAP-43 Load Line 10.* June 26
- 123 Leidos 2015d. *Final Remedial Investigation Report for Soil, Sediment, and Surface Water at*
124 *RVAAP-50 Atlas Scrap Yard.* June 26
- 125 Leidos 2016a. *Draft Remedial Investigation/Feasibility Study Report for Soil, Sediment, and*
126 *Surface Water at RVAAP-40 Load Line 7.* January 27
- 127 Leidos 2016b. *Draft Phase II Remedial Investigation Report and Feasibility Study for Soil,*
128 *Sediment, and Surface Water at RVAAP-42 Load Line 9.* February 10
- 129 Leidos 2016c. *Revised Draft Remedial Investigation Report for Soil, Sediment, and Surface*
130 *Water at RVAAP-39 Load Line 5.* April 7
- 131 Leidos 2016d. *Final PBA13 Sample and Analysis Plan Addendum for Surface Water and*
132 *Sediment at Load Lines 1, 2, 3, and 4.* April 8
- 133 Leidos 2016e. *Final Remedial Action Report for Soil, Sediment, and Surface Water at RVAAP-*
134 *48 Anchor Test Area.* April 16
- 135 Leidos 2016f. *Draft Proposed Plan for Soil, Sediment, and Surface Water at RVAAP-43 Load*
136 *Line 10.* May 6
- 137 Leidos 2016g. *Revised Draft Remedial Investigation Report for Soil, Sediment, and Surface*
138 *Water at RVAAP-41 Load Line 8.* May 10
- 139 Leidos 2016h. *Revised Draft Phase II Remedial Investigation Report for Soil, Sediment, and*
140 *Surface Water at RVAAP-44 Load Line 11.* June 22
- 141 Leidos 2016i. *Draft Engineering Evaluation/Cost Analysis for RVAAP-67 Facility-wide Sewers:*
142 *Load Line 2 Functional Area and CC-RVAAP-75 George Road Sewage Treatment Plant*
143 *Mercury Spill.* September 21
- 144 Leidos 2016j. *Draft Feasibility Study Addendum for Soil, Sediment, and Surface Water at*
145 *RVAAP Load Lines 1, 2, 3, 4, and 12.* November 22
- 146 MacDonald and Mack Partnership 1984. *Historic Properties Report, Ravenna Army*
147 *Ammunition Plant, Ravenna, Ohio.* August
- 148 MKM Engineers, Inc. (MKM) 2004a. *Final Report LL-11 Interim Removal Action.* March
- 149 MKM 2004b. *Remedial Design/Removal Action Plan for Paris-Windham Road Dump.* March

- 150 MKM 2005. *Final Report for the Remedial Investigation at Load Line 11 (AOC 44)*. September
- 151 MKM 2007a. *Final Characterization of 14 AOCs at Ravenna Army Ammunition Plant*. March
- 152 MKM 2007b. *Final Report for the Phase I Remedial Investigation at Load Line 9 (RVAAP 42)*.
- 153 August
- 154 MKM 2008. *Final Remedial Action Work Plan Winklepeck Burning Grounds Ravenna Army*
- 155 *Ammunition Plant, Ravenna, Ohio*. July
- 156 MKM 2009. *Final Remedial Action Completion Report for RVAAP-05 Winklepeck Burning*
- 157 *Grounds Pads 61/61A, 67, and 70*. November
- 158 MKM 2010. *Final Construction Completion Report for the Demolition of RVAAP-09 Load Line*
- 159 *2, RVAAP-10 Load Line 3, and RVAAP-11 Load Line 4*. July
- 160 Ohio Army National Guard (OHARNG) 2014. *Updated Integrated Natural Resources*
- 161 *Management Plan (INRMP) At The Camp Ravenna Joint Military Training Center Portage and*
- 162 *Trumbull Counties, Ohio*. December
- 163 Ohio Environmental Protection Agency (Ohio EPA) 1999. *Letter to Ravenna Army Ammunition*
- 164 *Plant re: Completion of Partial Closure (for the Open Burning Ground Facility)*. May
- 165 Ohio EPA 2004. *Director's Final Findings and Orders in the Matter of United States*
- 166 *Department of the Army Ravenna Army Ammunition Plant 8451 State Route 5 Ravenna, Ohio*
- 167 *44244-9297*. June 10
- 168 Ohio EPA 2015. Letter to Mr. Mark Leeper, P.G., MBA Army National Guard Directorate;
- 169 subject: *Approval for the "Final Remedial Action Report for Soil and Dry Sediment at the*
- 170 *RVAAP-01 Ramsdell Quarry Landfill, at the Ravenna Army Ammunition Plant, Ravenna, Ohio,"*
- 171 *Dated January 30, 2015, Ohio EPA ID #267-000859-130*. February 27
- 172 PIKA International, Inc. (PIKA) 2009. *Final Removal Action Report for the Time Critical*
- 173 *Removal Action (TCRA) at the Rocket Ridge Area (RRA) Within RVAAP-004-R-01 Open*
- 174 *Demolition Area #2 MRS*. December 17
- 175 PIKA 2010. *Final Construction Completion Report – Removal of Buildings and Concrete Floor*
- 176 *Slabs at RVAAP-08 Load Line 1, & Other Miscellaneous Buildings and Removal & Disposal of*
- 177 *Pallets Version 1.0 Ravenna Army Ammunition Plant (RVAAP) Ravenna, Ohio*. July
- 178 PIKA 2016. *Preliminary Draft Report Site Investigation at Compliance Restoration Site CC*
- 179 *RVAAP-80 Group 2 Propellant Can Tops*. August 8

- 180 Prudent Technologies, Inc. (Prudent) 2010. *Final Project Management Plan for Sampling and*
181 *Closure of Load Lines 1, 2, 3, 4, 12 (RVAAP-08, 09, 10, 11, and 12) and Other Areas of Concern*
182 *Ravenna Army Ammunition Plant Ravenna, Ohio.* July
- 183 Prudent 2011. *Final Sampling Report of Surface and Subsurface Incremental Sampling*
184 *Methodology at Load Lines 1, 2, 3, and 4 (RVAAP-08, 09, 10, and 11) Ravenna Army*
185 *Ammunition Plant Ravenna, Ohio.* March
- 186 Prudent 2013. *Final Characterization Sampling Report of Surface and Subsurface Incremental*
187 *Sampling Methodology at RVAAP-08, 09, 10, 11, and 12, Land Lines 1, 2, 3, 4 and 12.* March
188 29
- 189 Science Applications International Corporation (SAIC) 1998. *Final Phase I Remedial*
190 *Investigation Report for the Phase I Remedial Investigation of High Priority Areas of Concern at*
191 *the Ravenna Army Ammunition Plant, Ravenna, Ohio...* February
- 192 SAIC 1998. *Final RCRA Closure Field Investigation Report for the Deactivation Furnace Area,*
193 *Open Detonation Area, Building 1601, and Pesticides Building Ravenna Army Ammunition*
194 *Plant, Ravenna, Ohio.* June
- 195 SAIC 2001a. *Final Phase II Remedial Investigation Report for the Winklepeck Burning Grounds*
196 *at the Ravenna Army Ammunition Plant, Ravenna, Ohio.* April
- 197 SAIC 2001b. *Final Phase I Remedial Investigation Report for the NACA Test Area at the*
198 *Ravenna Army Ammunition Plant.* December
- 199 SAIC 2002. *Revised Final Technical Memorandum Human Health and Ecological Risk*
200 *Assessment Approach for the Load Line 1 and Load Line 12 Phase II Remedial Investigations,*
201 *Ravenna Army Ammunition Plant, Ravenna, Ohio.* August
- 202 SAIC 2004. *Final Phase II Remedial Investigation Report for Load Line 12 at the Ravenna*
203 *Army Ammunition Plant, Ravenna, Ohio.* March
- 204 SAIC 2005a. *Revised Final Focused Feasibility Study for the Winklepeck Burning Grounds at*
205 *the Ravenna Army Ammunition Plant, Ravenna, Ohio.* March
- 206 SAIC 2005b. *Final Phase I Remedial Investigation December 2004 Follow-on Groundwater*
207 *Sampling at the Ramsdell Quarry Landfill at the Ravenna Army Ammunition Plant Ravenna,*
208 *Ohio.* June
- 209 SAIC 2005c. *Final Phase I Remedial Investigation Report for Ramsdell Quarry Landfill at the*
210 *Ravenna Army Ammunition Plant, Ravenna, Ohio.* September

- 211 SAIC 2005d. *Phase II Remedial Investigation Supplemental Report for Load Line 12 (RVAAP-*
212 *12) at the Ravenna Army Ammunition Plant, Ravenna, Ohio.* November
- 213 SAIC 2006a. *Final Supplemental Human Health Risk Assessment for Revised Range*
214 *Maintenance Soldier at the Former Winklepeck Burning Grounds.* May
- 215 SAIC 2006b. *Final Feasibility Study for Load Line 12 (RVAAP-12), Ravenna Army Ammunition*
216 *Plant Ravenna, Ohio.* July
- 217 SAIC 2006c. *Final Feasibility Study for Ramsdell Quarry Landfill (RVAAP-01) Ravenna Army*
218 *Ammunition Plant Ravenna, Ohio.* October
- 219 SAIC 2008. *Final Record of Decision for Soil and Dry Sediment at the RVAAP-05 Winklepeck*
220 *Burning Grounds at the Ravenna Army Ammunition Plant, Ravenna, Ohio.* August
- 221 SAIC 2009a. *Final Record of Decision for Soil and Dry Sediment for the RVAAP-12 Load Line*
222 *12 Ravenna Army Ammunition Plant Ravenna, Ohio.* March
- 223 SAIC 2009b. *Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell*
224 *Quarry Landfill Ravenna Army Ammunition Plant Ravenna, Ohio.* March 24
- 225 SAIC 2009c. *Final Remedial Design for the RVAAP-12 Load Line 12 Ravenna Army*
226 *Ammunition Plant Ravenna, Ohio.* October
- 227 SAIC 2010a. *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army*
228 *Ammunition Plant Ravenna, Ohio.* March
- 229 SAIC 2010b. *Revised Final Remedial Design for the RVAAP-01 Ramsdell Quarry Landfill*
230 *Ravenna Army Ammunition Plant Ravenna, Ohio.* June 17
- 231 SAIC 2010c. *Final Remedial Action Report for the RVAAP-12 Load Line 12 Ravenna Army*
232 *Ammunition Plant Ravenna, Ohio.* August
- 233 SAIC 2011a. *Final Facility-Wide Safety and Health Plan for Environmental Investigations*
234 *Revision 0 Ravenna Army Ammunition Plant Ravenna Ohio.* February
- 235 SAIC 2011b. *Final Engineering Evaluation for Soil and Dry Sediment at RVAAP-01 Ramsdell*
236 *Quarry Landfill Version 1.0 Ravenna Army Ammunition Plant Ravenna, Ohio.* September 2
- 237 SAIC 2011c. *Draft Remedial Investigation Report for Soil, Sediment, and Surface Water at*
238 *RVAAP-45 Wet Storage Area.* November 23
- 239 SAIC 2011d. *Draft Remedial Investigation Report for Soil, Sediment, and Surface Water at*
240 *RVAAP-46 Buildings F-15 and F-16.* November 23

- 241 SAIC 2011e. *Final Historical Records Review Report for the 2010 Phase I Remedial*
242 *Investigation Services at Compliance Restoration Sites (9 Areas of Concern)*. December 22
- 243 SAIC 2011f. *Draft Remedial Investigation/Feasibility Study Report for Soil, Sediment, and*
244 *Surface Water at RVAAP-06 C Block Quarry*. December 27
- 245 SAIC 2012a. *Draft Phase III Remedial Investigation Report for Wet Sediment and Surface*
246 *Water at RVAAP-12 Load Line 12*. February 3.
- 247 SAIC 2012b. *Draft Remedial Investigation/Feasibility Study Report for Soil, Sediment, and*
248 *Surface Water at RVAAP-19 Landfill North of Winklepeck Burning Grounds*. February 17
- 249 SAIC 2012c. *Draft Phase II Remedial Investigation and Feasibility Study Report for Soil,*
250 *Sediment, and Surface Water at RVAAP-38 NACA Test Area*. February 17
- 251 SAIC 2012d. *Draft Remedial Investigation/Feasibility Study Report for ft Phase II Remedial*
252 *Investigation Report for Soil, Sediment, and Surface Water at RVAAP-33 Load Line 6*. March 11
- 253 SAIC 2012e. *Draft Phase III Remedial Investigation Report and Feasibility Study for Soil,*
254 *Sediment and Surface Water at RVAAP-29 Upper and Lower Cobbs Ponds*. March 30
- 255 SAIC 2012f. *Revised Final Modified Proposed Plan for Soil and Dry Sediment at the RVAAP-*
256 *01 Ramsdell Quarry Landfill*. June 6
- 257 SAIC 2012g. *Draft Remedial Investigation/Feasibility Study Report for RVAAP-67 Facility-*
258 *Wide Sewers, Ravenna Army Ammunition Plant Ravenna Ohio (Excerpted Sections)*. September
259 7
- 260 SAIC 2013. *Final Record of Decision Amendment for Soil and Dry Sediment at the RVAAP-01*
261 *Ramsdell Quarry Landfill*. May 24
- 262 SAIC 2015a. *Revised Draft Proposed Plan for Soil, Sediment, and Surface Water for RVAAP-51*
263 *Dump Along Paris-Windham Road*. December 10
- 264 SAIC 2015b. *Final Site Characterization and Focused Feasibility Study for the RVAAP-51*
265 *Dump Along Paris-Windham Road*. December 15
- 266 Shaw E&I (Shaw) 2004a. *Final Supplemental Baseline Human Health Risk Assessment for Load*
267 *Line 1 Alternative Receptors at the Ravenna Army Ammunition Plant, Ravenna, Ohio*. July
- 268 Shaw 2004b. *Phase II Remedial Investigation Report for Load Line 2 at the at the Ravenna*
269 *Army Ammunition Plant, Ravenna, Ohio*. July

- 270 Shaw 2004c. *Proposed Remedial Goal Options for Soil at Load Lines 1, 2, 3, and 4 at the*
271 *Ravenna Army Ammunition Plant, Ravenna, Ohio.* September
- 272 Shaw Environmental, Inc. (Shaw) 2005a. *Final Focused Feasibility Study for the Remediation*
273 *of Soils at Load Lines 1 through 4 at the Ravenna Army Ammunition Plant Ravenna, Ohio.* May
- 274 Shaw 2005b. *Proposed Plan for the Remediation of Soils at Load Lines 1 through 4 at the*
275 *Ravenna Army Ammunition Plant Ravenna, Ohio.* July
- 276 Shaw 2007. *Final Remedial Action Work Plan Remediation of Soils at Load Lines 1, 2, 3, and 4*
277 *Ravenna Army Ammunition Plant Ravenna Ohio.* April
- 278 Shaw 2008. *Final Remedial Action Completion Report for the Remediation of Soils and Dry*
279 *Sediments at RVAAP 08-11 (Load Lines 1-4) Ravenna Army Ammunition Plant Ravenna, Ohio.*
280 June
- 281 Shaw 2010. *Final Work Plan for the Geochemical Evaluation of Metals in Groundwater at*
282 *Ravenna Army Ammunition Plant, Ravenna, Ohio Version 1.0.* March
- 283 Shaw 2011a. *Final Data Quality Objectives Report for RVAAP-05 Winklepeck Burning Grounds*
284 *Version 1.0 Ravenna Army Ammunition Plant Ravenna, Ohio.* June
- 285 Shaw 2011b. *Final Geochemical Evaluation of Metals in Groundwater at the Ravenna Army*
286 *Ammunition Plant Version 1.0 Ravenna Army Ammunition Plant Ravenna, Ohio.* June
- 287 Shaw 2012. *Draft Phase I Remedial Investigation for RVAAP-34 Sand Creek Disposal Road*
288 *Landfill.* July 19
- 289 Shaw 2013a. *Draft Feasibility Study for RVAAP-34 Sand Creek Disposal Road Landfill.*
290 September 16
- 291 Shaw 2013b. *Draft Proposed Plan for RVAAP-34 Sand Creek Disposal Road Landfill.*
292 September 16
- 293 TEC-Weston Joint Venture (TEC-Weston) 2016. *Draft Final Facility-Wide Groundwater*
294 *Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015.* February
295 12
- 296 U.S. Army Corps of Engineers (USACE) 1998. *Phase I Remedial Investigation Report for the*
297 *Phase I Remedial Investigation of High Priority Areas of Concern at the Ravenna Army*
298 *Ammunition Plant, Ravenna, Ohio.* February
- 299 USACE 2003. *Final RVAAP Facility Wide Ecological Risk Work Plan.* April

- 300 USACE 2004. *Final Facility-Wide Groundwater Monitoring Program Plan for the Ravenna*
301 *Army Ammunition Plant Ravenna, Ohio.* September
- 302 USACE 2005. *RVAAP's Facility Wide Human Health Risk Assessor Manual, Amendment 1.*
303 December 1
- 304 USACE. 2007. *Final Interim Record of Decision for the Remediation of Soils at Load Lines 1*
305 *Through 4 at the Ravenna Army Ammunition Plant Ravenna, Ohio.* January
- 306 USACE 2009. *Final Investigation of the Under Slab Surface Soils Post Slab and Foundation*
307 *Removal at RVAAP-39 Load Line 5, RVAAP-40 Load Line 7, RVAAP-41 Load Line – LL8, and*
308 *RVAAP-43 Load Line 10.* January 5
- 309 USACE 2012a. *Final (Revised) Ravenna Army Ammunition Plant (RVAAP) Position Paper for*
310 *the Application and Use of Facility-Wide Human Health Cleanup Goals.* February
- 311 USACE 2012b. *Final Property Management Plan for the Designated Areas of Concerns and*
312 *Munitions Response Sites Volume One.* August
- 313 USACE 2012c. *Final First Installation-Wide Five-Year Review Report for RVAAP-01 Ramsdell*
314 *Quarry Landfill RVAAP-05 Winklepeck Burning Grounds, RVAAP-08 Load Line 1 RVAAP-09*
315 *Load Line 2 RVAAP-10 Load Line 3 RVAAP-11 Load Line 4 RVAAP-12 Load Line 12.* August
- 316 USACE 2013a. *EM 200-I-16 Environmental Statistics.* May 31
- 317 USACE 2013b. *Final Risk Assessment Assumptions Document (RAAD) Addendum to the Work*
318 *Plan for the Additional Evaluation of the RVAAP-05 Winklepeck Burning Grounds.* July 24
- 319 USACE 2013c. *Draft Sampling and Risk Assessment Report for the Additional Evaluation of*
320 *RVAAP-05 Winklepeck Burning Grounds.* August 15
- 321 USACE 2014. *Draft Remedial Investigation/Feasibility Study Supplement for RVAAP-05*
322 *Winklepeck Burning Grounds.* January 10
- 323 USACE 2015a. *Final Explanation of Significant Differences for Post-ROD Changes to the*
324 *Remedy at RVAAP-05 Winklepeck Burning Grounds.* March
- 325 USACE 2015b. *Final Site Inspection Report for RVAAP-28 Suspected Mustard Agent Burial*
326 *Site.* April 27
- 327 USACE 2015c. *Final Remedial Design for the Post-ROD Changes to the Remedy at RVAAP-05*
328 *Winklepeck Burning Grounds.* August 27

- 329 USACE 2015d. *Final Action Memorandum Time-Critical Removal Action RVAAP-004-R-01*
330 *Open Demolition Area #2*. October 30
- 331 USACE 2016a. *Draft Revised Site Inspection for CC RVAAP-78 Quarry Pond Surface Dump*.
332 May 20
- 333 USACE 2016b. *Draft Addendum for the Remedial Design for the Post-ROD Changes to the*
334 *Remedy at RVAAP-05 Winklepeck Burning Grounds*. June 2
- 335 USACE 2016c. *Draft Engineering Evaluation/Cost Analysis: RVAAP-28 Suspected Mustard*
336 *Agent Burial Site at Camp Ravenna Joint Military Training Center*. August 22
- 337 U.S. Army Toxic and Hazardous Materials Agency (USATHMA) 1976. *Installation Assessment*
338 *of Ravenna Army Ammunition Plant, Report No. 132*. November
- 339 USEPA 1990. *National Oil and Hazardous Substances Pollution Contingency Plan Final Rule*,
340 *FR Vol. 55, No. 46, March 8*. Available from U.S. Government Printing Office, Washington,
341 D.C.
- 342 USEPA 2001. *EPA 540-R-01-007, Comprehensive Five-Year Review Guidance*. June
- 343 USEPA 2012. *Clarifying the Use of Protectiveness Determinations for Comprehensive*
344 *Environmental Response, Compensation, and Liability Act Five-Year Reviews*, OSWER 9200.2-
345 *111*. September
- 346 USEPA 2015. *Integrated Risk Information System (IRIS)*, National Center for Environmental
347 Assessments. <http://www.epa.gov/iris/>
- 348 URS Corporation (URS) 2009. *Final Multi-Increment Sampling and Analysis of Soils Below*
349 *Floor Slabs at RVAAP-09 Load Line 2, RVAAP-10 Load Line 3, and RVAAP-11 Load Line 4*.
350 December
- 351 URS 2010a. *Final Sampling and Analysis of Soils Below Floor Slabs at RVAAP-08 Load Line 1*
352 *and Other Building Locations*. September
- 353 URS 2010b. *Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-09 Load Line*
354 *2, RVAAP-10 Load Line 3, and RVAAP-11 Load Line 4*. December
- 355 URS 2011. *Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-08 Load Line 1*.
356 March
- 357 Vista Sciences Corporation (Vista) 2014a. *Final FY 2013 Annual Report for the Quarterly Land*
358 *Use Control Inspections, RVAAP-05 Winklepeck Burning Grounds*. July 16

- 359 Vista 2014b. *Final FY 2014 First Quarter Land Use Control Inspection, RVAAP-05 Winklepeck*
360 *Burning Grounds.* July 18
- 361 Vista 2014c. *Final FY 2014 Second Quarter Land Use Control Inspection, RVAAP-05*
362 *Winklepeck Burning Grounds.* July 22
- 363 Vista 2014d. *Final FY 2014 Third Quarter Land Use Control Inspection, RVAAP-05*
364 *Winklepeck Burning Grounds.* October 8
- 365 Vista 2014e. *Final FY 2014 Fourth Quarter Land Use Control Inspection, RVAAP-05*
366 *Winklepeck Burning Grounds.* October 10
- 367 Vista 2015a. *Final FY 2014 Annual Land Use Control Inspections, RVAAP-05 Winklepeck*
368 *Burning Grounds.* January 8
- 369 Vista 2015b. *Final FY 2015 First Quarter Land Use Control Inspection, RVAAP-05 Winklepeck*
370 *Burning Grounds.* April 3
- 371 Vista 2015c. *Final FY 2015 Second Quarter Land Use Control Inspection, RVAAP-05*
372 *Winklepeck Burning Grounds.* July 23
- 373 Vista 2015d. *Final FY 2015 Third Quarter Land Use Control Inspection, RVAAP-05*
374 *Winklepeck Burning Grounds.* October 30
- 375 Vista 2015e. *Final FY 2015 Fourth Quarter Land Use Control Inspection, RVAAP-05*
376 *Winklepeck Burning Grounds.* December 18
- 377 Vista 2016a. *Final 2015 Annual Land Use Control Monitoring Report, RVAAP-01 Ramsdell*
378 *Quarry Landfill and RVAAP-05 Winklepeck Burning Grounds.* January 27
- 379 Vista 2016b. *Draft FY 2016 First Quarter Land Use Control Inspection RVAAP-05 Winklepeck*
380 *Burning Grounds.* January 29
- 381 Vista 2016b. *Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support*
382 *Services.* February 2
- 383 Vista 2016c. *Draft FY 2016 Second Quarter Land Use Control Inspection RVAAP-05*
384 *Winklepeck Burning Grounds.* March 3
- 385 Vista 2016d. *Draft FY 2016 Third Quarter Land Use Control Inspection RVAAP-05 Winklepeck*
386 *Burning Grounds.* June 29

ATTACHMENT 3
Decision Document Summaries

Table A3-1 Decision Document Summary
Component: Background/Basis for Taking Action - Load Lines 1 Through 4

Decision Document Titles	<ol style="list-style-type: none"> Interim Record of Decision for the Remediation of Soils at Load Lines 1 Through 4 at the Ravenna Army Ammunition Plant (IROD) (January 2007) Department of the Army letter to Ohio EPA-Southwest District Office regarding removal of building slabs at Load Lines 1 through 4. (January 7, 2008)
Regulatory Framework	CERCLA Non-NPL
Remedy Chosen	<ol style="list-style-type: none"> Alternative Soil and Dry Sediment 3 (SDS3) – Excavation and Off-site Disposal (IROD) Building slab removal (January 7, 2008 letter)
Media of Concern	Surface and subsurface soils and dry sediment
Constituents of Concern (COCs)	<p>Inorganics: aluminum, antimony, arsenic, barium, cadmium, hexavalent chromium, manganese, and lead</p> <p>Explosives: 2,4,6-TNT and RDX</p> <p>PCBs: Aroclor-1254</p> <p>SVOCs: benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, and dibenz(a,h)anthracene</p> <p>COCs identified in soil at load lines 1-4 are presented in tables 2 and 3 of the IROD. (Pgs. 8 & 11)</p>
Land Use	<p>Current: Not used, vacant</p> <p>Future: National Guard mounted training, no digging</p>
Receptors	National Guard Trainee (IROD pg. 9)
Exposure Pathway	Inhalation, ingestion or direct contact (IROD pg. 9)
Ecological Risk	<p><i>“Based on the expected impact to site conditions at LLs 1-4 from remediation associated with achieving human health clean-up goals and proposed vehicular training activities (e.g., soil compaction, vegetation damage, etc.), ecologically based clean-up goals have been determined to be unnecessary.” (IROD pg. 10)</i></p>

Table A3-2 Decision Document Summary
Component: Remedial Action - Load Lines 1 Through 4
Page 1 of 2

Decision Document Titles	<ol style="list-style-type: none"> 1. Interim Record of Decision for the Remediation of Soils at Load Lines 1 Through 4 at the Ravenna Army Ammunition Plant (IROD) (January 2007) 2. Department of the Army letter to Ohio EPA-Southwest District Office regarding removal of building slabs at Load Lines 1 through 4. (January 7, 2008)
Remedy Chosen	<ol style="list-style-type: none"> 1. Alternative Soil and Dry Sediment 3 (SDS3) – Excavation and Off-site Disposal (IROD) 2. Building slab removal (January 7, 2008 letter)
Remedial Action Objective (RAO)	Prevent the ingestion, inhalation, or direct contact with COCs exceeding cleanup goals for soil and dry sediment.
Clean-Up Goals	<i>“Clean-up goals for surface and subsurface soils and dry sediment at LLs 1-4 at RVAAP were determined based on risk-based and site-specific considerations, including background concentrations, duration of reasonable maximum human exposures, and reasonably anticipated future land use (National Guard mounted training, no digging). The resulting clean-up goals for the National Guard Trainee for soil at LLs 1-4 are presented in Table 3.” (IROD pgs.10 &11)</i>
Applicable or Relevant and Appropriate Requirements (ARARs)	<p>There are no chemical-specific ARARs.</p> <p>Action- and location-specific ARARs for each alternative are varied and numerous. They are identified for the selected remedy in IROD Attachment 1 (Pg.14).</p>

Table A3-2 Decision Document Summary
Component: Remedial Action - Load Lines 1 Through 4
Page 2 of 2

Components of the Remedy	<p>1. IROD</p> <ul style="list-style-type: none">• Excavation of discrete areas of contaminated surface and subsurface soils and dry sediment with concentrations of contaminants exceeding clean-up goals• Temporary on-site storage via stockpiling for characterization• Off-site disposal of soils at a permitted solid waste landfill and, as needed, disposal at a TSCA and/or RCRA permitted hazardous waste landfill• Replacement of excavated material with clean compacted backfill• Groundwater monitoring to ensure the Selected Remedy did not impact groundwater• Maintenance of building slabs and foundations <p>2. January 7, 2008 letter</p> <ul style="list-style-type: none">• Building slab removal
--------------------------	---

Table A3-3 Decision Document Summary
Component: Background/Basis for Taking Action - Load Line 12

Decision Document Title	Final Record of Decision for Soil and Dry Sediment for the RVAAP-12 Load Line 12 (March 2009)
Regulatory Framework	CERCLA Non-NPL
Remedy Chosen	Alternative 3: Excavation and Off-site Disposal – National Guard Trainee Land Use
Media of Concern	Soil and dry sediment
COCs	<i>Inorganics:</i> arsenic ROD Part II, Table 2 (Pg. 12)
Land Use	<i>Current:</i> Not used, vacant <i>Future:</i> National Guard mounted training, no digging
Receptors	National Guard Trainee (ROD pg. 10)
Exposure Pathway	ROD: <i>“The Baseline Risk Assessment (BRA) identifies the exposure pathways, COCs, if any, and provides a basis for the remedial decisions.”</i> (Pg. 10) BRA: Inhalation, ingestion, and dermal contact (Phase II RI, Section 6.3.2)
Ecological Risk	<i>“The Feasibility Study presents a weight-of-evidence evaluation that no quantitative ecological clean-up goals be developed at LL12.”</i> (ROD pg. 11)

Table A3-4 Decision Document Summary
Component: Remedial Action - Load Line 12

Decision Document Title	Final Record of Decision for Soil and Dry Sediment for the RVAAP-12 Load Line 12 (March 2009)
Remedy Chosen	Alternative 3: Excavation and Off-site Disposal – National Guard Trainee Land Use
RAO	Prevent National Guard Trainee exposure to contaminants in soil and dry sediment that exceed the clean-up goals to a depth of 4 ft bgs. (ROD pg. 11)
Clean-Up Goal	Arsenic – 31 mg/kg (ROD Part II, Table 2, pg. 12)
ARARs	<i>“There are no identified chemical-specific or location-specific applicable and relevant or appropriate requirements (ARARs).”</i> <i>“Action-specific ARARs were identified for Alternative 3.”</i> (ROD pg. 16)
Components of the Remedy	<ul style="list-style-type: none"> • Remedial design plan • Excavation • Handling of waste materials • Off-site disposal • Confirmatory sampling • Restoration • Land-use controls <p>Institutional Control Components:</p> <p><i>“Land use controls (LUCs) shall be maintained until the concentrations of hazardous substances in the soil and groundwater are reduced to levels that allow for unrestricted use. The Remedial Design (RD) shall include a LUC component describing the details of LUC implementation and maintenance, including periodic inspections.”</i> (ROD pg. 21)</p>

Table A3-5 Decision Document Summary
Component: Background/Basis for Taking Action – Winklepeck Burning Grounds
Page 1 of 2

Decision Document Titles	<ol style="list-style-type: none"> 1. Record of Decision (ROD) for Soil and Dry Sediment at the RVAAP-05 Winklepeck Burning Grounds (August 2008) 2. Final Explanation of Significant Differences (ESD) for Post-ROD Changes to the Remedy at RVAAP-05 Winklepeck Burning Grounds (March 2015)
Regulatory Framework	CERCLA Non-NPL
Remedy Chosen	<ol style="list-style-type: none"> 1. ROD: Alternative 2: Chemical Contamination Removal Concurrent with MEC Removal Action – Excavation, Screen for Potential MEC, Composite Sampling, and Disposal. (ROD pg. II-27) 2. ESD: Removal of contaminated soil at Pad 38, Pad 61/61A, and Pad 66/67 (ESD pg. 10)
Media of Concern	Soil and dry sediment
COCs	<ol style="list-style-type: none"> 1. ROD (Table II, Pg. II-4) Explosives: RDX SVOCs: benzo(a)pyrene, dibenz(a,h)anthracene, benzo(a)anthracene, benzo(b)fluoranthene, and indeno(1,2,3-cd)pyrene 2. ESD (Table 1, Pg. 10) Explosives: RDX & TNT SVOCs: PAHs
Land Use	<p>Current: Military training, Mark 19 Grenade Machine Gun range</p> <p>Future: Military training, Mark 19 Grenade Machine Gun range & Multi-Purpose Machine Gun range (ESD pgs. 3 & 9)</p>
Receptors	<p>Range Maintenance Soldier (ROD pg. II-12)</p> <p>Full-time military worker (ESD pg. 10)</p>
Exposure Pathway	Inhalation, ingestion, or direct contact (Phase II RI, Section 6 Baseline Risk Assessment)

Table A3-5 Decision Document Summary
Component: Background/Basis for Taking Action – Winklepeck Burning Grounds
Page 2 of 2

Ecological Risk	<i>“Mitigation of relatively small current risks to ecological resources will be achieved through remediation and any concurrent MEC removal to protect the Range Maintenance Soldier.” (ROD pg. II-13).</i>
-----------------	--

Table A3-6 Decision Document Summary
Component: Remedial Action - Winklepeck Burning Grounds
Page 1 of 2

Decision Document Titles	<ol style="list-style-type: none"> 1. Record of Decision (ROD) for Soil and Dry Sediment at the RVAAP-05 Winklepeck Burning Grounds (August 2008) 2. Final Explanation of Significant Differences (ESD) for Post-ROD Changes to the Remedy at RVAAP-05 Winklepeck Burning Grounds (March 2015)
Remedy Chosen	<ol style="list-style-type: none"> 1. ROD: Alternative 2: Chemical Contamination Removal Concurrent with MEC Removal Action – Excavation, Screen for Potential MEC, Composite Sampling, and Disposal. (ROD pg. II-27) 2. ESD: Removal of contaminated soil at Pad 38, Pad 61/61A, and Pad 66/67 (ESD pg. 10)
RAOs	<ol style="list-style-type: none"> 1. ROD: Prevent exposure of the National Guard Range Maintenance Soldier to contaminants in soil that exceeding risk-based cleanup goals extending to a maximum depth of 4 ft below ground surface. (ROD section 4.0, pgs. II-5 & II-6). 2. ESD: Prevent exposure to soils with contaminant concentrations greater than cleanup goals which are based on USEPA Industrial RSLs.
Clean-Up Goals	<ol style="list-style-type: none"> 1. ROD: RDX (617 mg/kg), benz(a)anthracene (75 mg/kg), benzo(a)pyrene (7.5 mg/kg), benzo(b)flouranthene (75 mg/kg), dibenz(a,h)anthracene (7.5 mg/kg), and indeno(1,2,3-cd)pyrene (75 mg/kg) (ROD Table II, pg. II-4) 2. ESD: TNT (420 mg/kg), RDX (240 mg/kg) (Remedial Design, Sec. 4.3) and benzo(a)pyrene (2.1 mg/kg) (draft RI/FS Supplement, Table 2-2)
ARARs	<p><i>“There are no identified chemical-specific ARARs for WBG soil remediation alternatives. Location- and action-specific ARARS for alternatives are listed in Table 4.” (ROD pg. II-17)</i></p>

Table A3-6 Decision Document Summary
Component: Remedial Action - Winklepeck Burning Grounds
Page 2 of 2

Components of the Remedies	<p>1. ROD:</p> <ul style="list-style-type: none">• Clearing of vegetation• Geophysical surveys and visual inspections for identifying metal debris• Removal or transite and friable asbestos from the surface and subsurface within the footprint of Pad 70• Excavation of contaminated soil by layers to a depth of 0.3 to 1.2 m (1 to 4 ft)• Screening (sifting) of the excavated soil for metal debris (potential MEC)• Confirmation sampling of the chemical characteristics of the remaining soil and for the absence of visible asbestos within the sides and bottom of the excavation• Multi-increment sampling and testing of sifted soil to determine disposal requirements• Disposal of contaminated soil (above remediation goals) at an approved off-site facility• Backfill of the excavations using fill material from a source approved by the U.S. Army and Ohio EPA• Site restoration• Implementation of LUCs for the AOC <p>2. ESD:</p> <ul style="list-style-type: none">• Removal of contaminated soil at pads 38, 61/61A, and 66/67 in accordance with ESD Table 1 (Pg. 10)• Revised restrictions/land use controls (Secs. 4.4 – 4.6, pgs. 13 - 14)
----------------------------	---

Table A3-7 Decision Document Summary
Component: Background/Basis for Taking Action – Ramsdell Quarry Landfill
Page 1 of 2

Decision Document Titles	<ol style="list-style-type: none"> 1. Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell Quarry Landfill (ROD) (March 2009) 2. Final Record of Decision Amendment for Soil and Dry Sediment at the RVAAP-01 Ramsdell Quarry Landfill (ROD Amendment) (May 2013)
Regulatory Framework	CERCLA Non-NPL
Remedies Chosen	<ol style="list-style-type: none"> 1. ROD: Alternative 3 Excavation and Off-site Disposal, Security Guard/Maintenance Worker Land Use. 2. ROD Amendment: Alternative 8 Perimeter Fence – Security Guard/Maintenance Worker with Restricted Land Use
Media of Concern	Soil and dry sediment
COCs	Benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, dibenz(a,h)anthracene, & indeno(1,2,3-cd)pyrene (ROD Table II, part II, pg. 12)
Land Use	<p>Current: Closed landfill, restricted access for security, maintenance and monitoring activities</p> <p>Future: As above</p>
Receptors	Security Guard/Maintenance Worker (ROD part II, pg. 10)
Exposure Pathway	<p><i>“The BRA identifies the exposure pathways, COCs, if any, and provides a basis for the remedial decisions.”</i> (ROD part II, pg. 10)</p> <p>Baseline Risk Assessment (BRA): Inhalation, ingestion, and dermal contact (Phase II RI, Table 6-15)</p>
Ecological Risk	<i>“Remediation to meet human health cleanup goals will reduce overall contaminant concentrations and ecological risk.”</i> (ROD Part II, pg. 11)

Table A3-8 Decision Document Summary
Component: Remedial Action – Ramsdell Quarry Landfill
Page 1 of 2

Decision Document Titles	<ol style="list-style-type: none"> 1. Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell Quarry Landfill (ROD) (March 2009) 2. Final Record of Decision Amendment for Soil and Dry Sediment at the RVAAP-01 Ramsdell Quarry Landfill (ROD Amendment) (May 2013)
Remedies Chosen	<ol style="list-style-type: none"> 1. ROD: Alternative 3 Excavation and Off-site Disposal, Security Guard/Maintenance Worker Land Use. 2. ROD Amendment: Alternative 8 – Perimeter Fence – Security Guard/Maintenance Worker with Restricted Land Use
RAOs	<ol style="list-style-type: none"> 1. ROD: Prevent National Guard Security Guard/Maintenance Worker exposure to contaminants in soil and dry sediment that exceed clean-up goals to a depth of 1 ft bgs. (ROD Part II pg. 12) 2. ROD Amendment: Protect future receptors from remaining COCs in soil above cleanup goals and residual asbestos by restricting access to the AOC. (Remedial Design, section 4.0, page 4-1)
Clean-Up Goals	Benz(a)anthracene (13 mg/kg), benzo(a)pyrene (1.3 mg/kg), benzo(b)fluoranthene (13 mg/kg), dibenz(a,h)anthracene (1.3 mg/kg), and indeno(1,2,3-cd)pyrene (13 mg/kg). (ROD Part II. Pg. 23)
ARARs	<p>There are no location and chemical specific ARARS.</p> <p><i>“The selected remedy will comply with the action-specific ARARs listed in Attachment A.” (ROD Part II Pg 23)</i></p> <p><i>“The presence of ACM within the contaminated area triggers a relevant and appropriate requirement for this activity under OAC 3745-20-07(A)(2) to cover asbestos-containing waste material with a least six inches of compacted non-ACM, and grow and maintain a cover of vegetation on the area adequate to prevent exposure of the asbestos-containing material.” (Final Engineering Evaluation, section 5.4.2.2, pgs. 5-6 & 5-7).</i></p>

Table A3-8 Decision Document Summary
Component: Remedial Action – Ramsdell Quarry Landfill
Page 2 of 2

Components of the Remedies	<ol style="list-style-type: none">1. ROD (Part II, pg.19):<ul style="list-style-type: none">• Preparation of a remedial design plan• Excavation• Handling of waste materials• Off-site disposal• Confirmatory sampling• Site restoration• Land use controls2. ROD Amendment (Part IV, pg. 11):<ul style="list-style-type: none">• [Installation of] a fence at the perimeter of the site to encompass the closed landfill, quarry bottom, and wetlands• Implementing best management practices to remove surficial ACM through non-intrusive/no-digging methods
----------------------------	---

ATTACHMENT 4
Site Inspection Checklists

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 1

I. SITE INFORMATION			
Site name: <i>Camp Ravenna Joint Military Training Center Load Line 1 (RVAAP-08)</i>		Date of inspection: <i>August 10, 2016</i>	
Location and Region: <i>Portage and Trumbull Counties Ohio</i>		EPA ID: <i>OH5210020736 (CERCLIS)</i>	
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>		Weather/temperature: <i>~85°F, partly cloudy, humid</i>	
Remedy Includes: (Check all that apply) <div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <input type="checkbox"/> Landfill cover/containment <input type="checkbox"/> Access controls <input type="checkbox"/> Institutional controls <input type="checkbox"/> Groundwater pump and treatment <input type="checkbox"/> Surface water collection and treatment </div> <div style="width: 50%;"> <input type="checkbox"/> Monitored natural attenuation <input type="checkbox"/> Groundwater containment <input type="checkbox"/> Vertical barrier walls </div> </div> <input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim Record of Decision for the Remediation of Soils at Load Lines 1 Through 4 at the Ravenna Army Ammunition Plant (January 2007) (Interim ROD). Groundwater monitoring is required.</u>			
Attachments: <input type="checkbox"/> Inspection team roster attached <input checked="" type="checkbox"/> Site map attached (Attachment 1)			
II. INTERVIEWS (Check all that apply)			
1.	O&M site manager	<u>Al Brillinger (Vista Environmental Services)</u> <u>Program Manager</u> <u>11/07/16</u> <div style="display: flex; justify-content: space-between; font-size: small;"> Name Title Date </div> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email Phone no. <u>(502) 315-6892</u> Problems, suggestions; <input checked="" type="checkbox"/> Report attached _____ _____	
2.	O&M staff	_____ <div style="display: flex; justify-content: space-between; font-size: small;"> Name Title Date </div> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone Phone no. _____ Problems, suggestions; <input type="checkbox"/> Report attached _____ _____	
3.	Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply. Agency <u>Ohio Environmental Protection Agency</u> Contact <u>Rodney Beals</u> _____ _____ <u>(330) 963-1218</u> <div style="display: flex; justify-content: space-between; font-size: small;"> Name Title Date Phone no. </div> Problems; suggestions; <input checked="" type="checkbox"/> Report attached _____ _____		
4.	Other interviews (optional) <input checked="" type="checkbox"/> Reports attached. (Attachment 6)		
<ul style="list-style-type: none"> Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager 			
<ul style="list-style-type: none"> Kevin Sedlak, National Guard Bureau, Restoration Project Manager 			
<ul style="list-style-type: none"> Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2 			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 1

•	Gregory Moore, USACE Louisville District Project Manager			
•	Nathaniel Peters, USACE Louisville District Environmental Engineer			
•	Angela Schmidt, USACE Louisville District Risk Assessor			
•	Allan Brillinger, Vista Environmental Sciences Program Manager			
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA			
•	Tom Tadsen, RAB Co-Chair			
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)				
1.	O&M Documents <input type="checkbox"/> O&M manual <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Maintenance logs <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Remedial action completion drawings are provided in <i>Final Remedial Action Completion Report for the Remediation of Soils and Dry Sediments at RVAAP 08-11 (Load Lines 1-4) (June 2008)</i>, <i>Final Construction Completion Report – Removal of Buildings and Concrete Floor Slabs at RVAAP-08 Load Line 1 & Other Miscellaneous Buildings and Removal & Disposal of Pallets (July 14, 2010)</i>, and <i>Final Remediation Completion Report Sub-Slab Soils at RVAAP-08 Load Line 1 (March 10, 2011)</i>.</u>			
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>			
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Groundwater monitoring at Camp Ravenna is performed on a facility-wide basis. The most recent available report is <i>Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Report on the March 2015 Sampling Event Former Ravenna Army Ammunition Plant Portage and Trumbull Counties, Ohio (September 21, 2015)</i>.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 1

8.	Leachate Extraction Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
9.	Discharge Compliance Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Air		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Water (effluent)		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
10.	Daily Access/Security Logs	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: <u>Daily access/security logs are not maintained.</u>				
IV. O&M COSTS				
1.	O&M Organization			
<input type="checkbox"/> State in-house		<input type="checkbox"/> Contractor for State		
<input type="checkbox"/> PRP in-house		<input type="checkbox"/> Contractor for PRP		
<input type="checkbox"/> Federal Facility in-house		<input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation)		
<input type="checkbox"/> Other: _____				
2.	O&M Cost Records			
<input type="checkbox"/> Readily available		<input type="checkbox"/> Up to date		
<input type="checkbox"/> Funding mechanism/agreement in place				
Original O&M cost estimate: <u>Not applicable</u>		<input type="checkbox"/> Breakdown attached		
Total annual cost by year for review period if available <u>(not available)</u>				
3.	Unanticipated or Unusually High O&M Costs During Review Period			
Describe costs and reasons: <u>Not applicable</u>				
V. ACCESS AND INSTITUTIONAL CONTROLS <input type="checkbox"/> Applicable <input checked="" type="checkbox"/> N/A				
A.	Fencing			
1.	Fencing damaged	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Gates secured	<input type="checkbox"/> N/A
Remarks: <u>Access controls are not part of the remedy. Load Line 1 is surrounded by a chain link fence with locked gate. The fence appears to be intact, although some isolated areas are in poor condition and show signs of distress. Camp Ravenna is surrounded by a perimeter fence that consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. Annual LUC inspection reports for Winklepeck Burning Grounds and Ramsdell Quarry Landfill document any major defects in the perimeter fence and actions taken to repair the defects.</u>				

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 1

B. Other Access Restrictions			
1.	Signs and other security measures	<input type="checkbox"/> Location shown on site map	<input type="checkbox"/> N/A
Remarks: <u>Access controls are not part of the remedy. The Load Line 1 fence is absent at a former Gate House building. Access at this location is restricted using warning signs and a cable barricade with reflective tape markers. Warning signs restricting access are also posted at the site entrance gate.</u>			
C. Institutional Controls (ICs)			
1.	Implementation and enforcement		
Site conditions imply ICs not properly implemented		<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
Site conditions imply ICs not being fully enforced		<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
Type of monitoring (e.g., self-reporting, drive by)		<u>None</u>	
Frequency			
Responsible party/agency			
Contact			
	Name	Title	Phone no.
Reporting is up-to-date		<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
Reports are verified by the lead agency		<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
Specific requirements in deed or decision documents have been met		<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
Violations have been reported		<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
Other problems or suggestions: <input type="checkbox"/> Report attached			
<u>ICs are not part of the remedy.</u>			
2.	Adequacy	<input type="checkbox"/> ICs are adequate	<input type="checkbox"/> ICs are inadequate <input checked="" type="checkbox"/> N/A
<u></u>			
<u></u>			
D. General			
1.	Vandalism/trespassing	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> No vandalism evident
Remarks: <u></u>			
<u></u>			
2.	Land use changes on site	<input checked="" type="checkbox"/> N/A	
Remarks: <u>The site is not used for activities other than environmental monitoring, sampling, and remediation.</u>			
<u></u>			
3.	Land use changes off site	<input checked="" type="checkbox"/> N/A	
Remarks: <u></u>			
<u></u>			
VI. GENERAL SITE CONDITIONS			
A. Roads			
		<input checked="" type="checkbox"/> Applicable	<input type="checkbox"/> N/A
1.	Roads damaged	<input checked="" type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A
Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for environmental monitoring activities.</u>			
<u></u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 1

B.	Other Site Conditions
	<p>Remarks <u>The former buildings, including floor slabs, have been removed. Elevated concrete walkways between the former buildings remain in place. The site consists of open grass-covered areas and areas containing trees and brush. Monitoring wells are present.</u></p>
<p>Note: Sections VII through IX were removed from this checklist because they are not applicable</p>	
<p>X. OTHER REMEDIES</p>	
<p>If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction.</p> <p>Remarks : <u>There are no other remedies at the site.</u></p>	
<p>XI. OVERALL OBSERVATIONS</p>	
A.	Implementation of the Remedy
	<p>Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.).</p> <p><u>The remedy was implemented to protect human health and the environment from exposure to contaminants (inorganics, explosives, PCBs, and SVOCs) attributed to former site operations associated with the assembly and demilitarization of large caliber projectiles, general-purpose bombs, and parts from these munitions. The remedy consisted of excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim ROD. Clean soils were backfilled in the excavations and graded. The former buildings, including floor slabs, were subsequently removed. The site inspection did not identify evidence of trespass or OHARNG training.</u></p> <p><u>The remedy is effective and functioning as designed.</u></p>
B.	Adequacy of O&M
	<p>Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy.</p> <p><u>Maintenance activities consist of keeping site gates closed, keeping site roads passable (i.e. snow plowing), culvert maintenance, mowing (once per year), and clearing vegetation. Inspection and maintenance of building slabs, prescribed in the Interim ROD, is no longer required because the slabs and contaminated soil beneath the slabs were removed and disposed offsite.</u></p> <p><u>Monitoring activities consist of quarterly sampling and analysis of groundwater for VOCs, SVOCs, PCBs, pesticides, explosives, propellants, inorganics, and cyanide. All monitoring wells are properly secured/locked, in good condition, and routinely sampled. Subsequent sampling and analysis has been conducted to evaluate the presence and extent of contamination in sub slab soils and underground utility lines.</u></p>
C.	Early Indicators of Potential Remedy Problems
	<p>Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future.</p> <p><u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u></p>

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 1

D. Opportunities for Optimization
Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy. <u>Opportunities for optimization were not identified.</u>

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 2

I. SITE INFORMATION			
Site name: <i>Camp Ravenna Joint Military Training Center Load Line 2 (RVAAP-09)</i>		Date of inspection: <i>August 10, 2016</i>	
Location and Region: <i>Portage and Trumbull Counties Ohio</i>		EPA ID: <i>OH5210020736 (CERCLIS)</i>	
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>		Weather/temperature: <i>~85°F, partly cloudy, humid</i>	
Remedy Includes: (Check all that apply) <div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <input type="checkbox"/> Landfill cover/containment <input type="checkbox"/> Access controls <input type="checkbox"/> Institutional controls <input type="checkbox"/> Groundwater pump and treatment <input type="checkbox"/> Surface water collection and treatment <input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim Record of Decision for the Remediation of Soils at Load Lines 1 Through 4 at the Ravenna Army Ammunition Plant (January 2007) (Interim ROD). Groundwater monitoring is required.</u> </div> <div style="width: 50%;"> <input type="checkbox"/> Monitored natural attenuation <input type="checkbox"/> Groundwater containment <input type="checkbox"/> Vertical barrier walls </div> </div>			
Attachments: <input type="checkbox"/> Inspection team roster attached <input checked="" type="checkbox"/> Site map attached (Attachment 1)			
II. INTERVIEWS (Check all that apply)			
1.	O&M site manager	<u>Al Brillinger (Vista Environmental Services)</u> <div style="text-align: center;">Name</div>	<u>Program Manager</u> <div style="text-align: center;">Title</div>
		<u>11/07/16</u> <div style="text-align: center;">Date</div>	
		Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email Phone no. <u>(502) 315-6892</u> Problems, suggestions; <input checked="" type="checkbox"/> Report attached _____ _____	
2.	O&M staff	_____ <div style="text-align: center;">Name</div>	_____ <div style="text-align: center;">Title</div>
		_____ <div style="text-align: center;">Date</div>	
		Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone Phone no. _____ Problems, suggestions; <input type="checkbox"/> Report attached _____ _____	
3.	Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply.		
	Agency <u>Ohio Environmental Protection Agency</u> Contact <u>Rodney Beals</u> _____ <u>(330) 963-1218</u> <div style="display: flex; justify-content: space-between;"> <div style="width: 30%;">Name</div> <div style="width: 30%;">Title</div> <div style="width: 30%;">Date</div> <div style="width: 10%;">Phone no.</div> </div> Problems; suggestions; <input checked="" type="checkbox"/> Report attached _____ _____		
4.	Other interviews (optional) <input checked="" type="checkbox"/> Reports attached. (Attachment 6)		
	<ul style="list-style-type: none"> Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager 		
	<ul style="list-style-type: none"> Kevin Sedlak, National Guard Bureau, Restoration Project Manager 		
	<ul style="list-style-type: none"> Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2 		

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 2

•	Gregory Moore, USACE Louisville District Project Manager			
•	Nathaniel Peters, USACE Louisville District Environmental Engineer			
•	Angela Schmidt, USACE Louisville District Risk Assessor			
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA			
•	Allan Brillinger, Vista Environmental Sciences Program Manager			
•	Tom Tadsen, RAB Co-Chair			
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)				
1.	O&M Documents <input type="checkbox"/> O&M manual <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Maintenance logs <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Remedial action completion drawings are provided in <i>Final Remedial Action Completion Report for the Remediation of Soils and Dry Sediments at RVAAP 08-11 (Load Lines 1-4) (June 2008)</i> and <i>Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-09 Load Line 2, RVAAP-10 Load Line 3, and RVAAP-11, Load Line 4 (December 17, 2010)</i>.</u>			
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>			
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks : _____			
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Groundwater monitoring at Camp Ravenna is performed on a facility-wide basis. The most recent available report is <i>Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Report on the March 2015 Sampling Event Former Ravenna Army Ammunition Plant Portage and Trumbull Counties, Ohio (September 21, 2015)</i>.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 2

8.	Leachate Extraction Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
9.	Discharge Compliance Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Air		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Water (effluent)		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
10.	Daily Access/Security Logs	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
IV. O&M COSTS				
1.	O&M Organization			
<input type="checkbox"/> State in-house		<input type="checkbox"/> Contractor for State		
<input type="checkbox"/> PRP in-house		<input type="checkbox"/> Contractor for PRP		
<input type="checkbox"/> Federal Facility in-house		<input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation)		
<input type="checkbox"/> Other: _____				
2.	O&M Cost Records			
<input type="checkbox"/> Readily available		<input type="checkbox"/> Up to date		
<input type="checkbox"/> Funding mechanism/agreement in place				
Original O&M cost estimate: _____		<input type="checkbox"/> Breakdown attached		
Total annual cost by year for review period if available <u>(not available)</u>				
3.	Unanticipated or Unusually High O&M Costs During Review Period			
Describe costs and reasons: <u>Not applicable</u>				
V. ACCESS AND INSTITUTIONAL CONTROLS <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A				
A. Fencing				
1.	Fencing damaged	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Gates secured	<input type="checkbox"/> N/A
Remarks: <u>Access controls are not part of the remedy. Load Line 2 is surrounded by a chain link fence with locked gate. The fence appears to be intact, although some isolated areas are in poor condition and show signs of distress. Camp Ravenna is surrounded by a perimeter fence that consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. Annual LUC inspection reports for Winklepeck Burning Grounds and Ramsdell Quarry Landfill document any major defects in the perimeter fence and actions taken to repair the defects.</u>				

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 2

B. Other Access Restrictions			
1.	Signs and other security measures	<input type="checkbox"/> Location shown on site map <input type="checkbox"/> N/A	
Remarks: <u>The Load Line 2 fence is absent at a former Gate House building. Access at this location is restricted using warning signs and a cable barricade with reflective tape markers. Warning signs restricting access are also posted at the site entrance gate.</u>			
C. Institutional Controls (ICs)			
1.	Implementation and enforcement Site conditions imply ICs not properly implemented <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Site conditions imply ICs not being fully enforced <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Type of monitoring (e.g., self-reporting, drive by) <u>None</u> Frequency _____ Responsible party/agency _____ Contact _____		
	Name	Title	Phone no.
	Reporting is up-to-date <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Reports are verified by the lead agency <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Specific requirements in deed or decision documents have been met <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Violations have been reported <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Other problems or suggestions: <input type="checkbox"/> Report attached <u>ICs are not part of the remedy for Load Line 2.</u>		
2.	Adequacy	<input type="checkbox"/> ICs are adequate <input type="checkbox"/> ICs are inadequate <input checked="" type="checkbox"/> N/A	
D. General			
1.	Vandalism/trespassing	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> No vandalism evident	
Remarks: _____			
2.	Land use changes on site	<input checked="" type="checkbox"/> N/A	
Remarks: <u>The site is not used for activities other than environmental monitoring, sampling, and remediation.</u>			
3.	Land use changes off site	<input checked="" type="checkbox"/> N/A	
Remarks: _____			
VI. GENERAL SITE CONDITIONS			
A. Roads	<input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A		
1.	Roads damaged	<input checked="" type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A	
Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for range operations and environmental monitoring activities.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 2

B.	Other Site Conditions
	<p>Remarks <u>The former buildings, including floor slabs, have been removed. Elevated concrete walkways between the former buildings remain in place. The site consists of open grass-covered areas and areas containing trees and brush. Monitoring wells are present.</u></p>
<p>Note: Sections VII through IX were removed from this checklist because they are not applicable</p>	
<p>X. OTHER REMEDIES</p>	
<p>If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction.</p> <p>Remarks : <u>There are no other remedies at the site.</u></p>	
<p>XI. OVERALL OBSERVATIONS</p>	
A.	Implementation of the Remedy
	<p>Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.).</p> <p><u>The remedy was implemented to protect human health and the environment from exposure to contaminants (inorganics, explosives, PCBs, and SVOCs) attributed to former site operations associated with the assembly and demilitarization of large caliber projectiles, general-purpose bombs, and parts from these munitions. The remedy consisted of excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim ROD. Clean soils were backfilled in the excavations and graded. The former buildings, including floor slabs, were subsequently removed. The site inspection did not identify evidence of OHARNG use or trespass by the public. Groundwater monitoring is performed under a facility-wide program.</u></p> <p><u>The remedy is effective and functioning as designed.</u></p>
B.	Adequacy of O&M
	<p>Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy.</p> <p><u>Maintenance activities consist of keeping site gates closed, keeping site roads passable (i.e. snow plowing), culvert maintenance, mowing (once per year), and clearing vegetation. Inspection and maintenance of building slabs, prescribed in the Interim ROD, is no longer required because the slabs and contaminated soil beneath the slabs were removed and disposed offsite.</u></p> <p><u>Monitoring activities consist of quarterly sampling and analysis of groundwater for VOCs, SVOCs, PCBs, pesticides, explosives, propellants, inorganics, and cyanide. All monitoring wells are properly secured/locked, in good condition, and routinely sampled. Subsequent sampling and analysis has been conducted to evaluate the presence and extent of contamination in sub slab soils and underground utility lines.</u></p>

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 2

C.	Early Indicators of Potential Remedy Problems
Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future.	
<u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u>	
D.	Opportunities for Optimization
Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy.	
<u>Opportunities for optimization were not identified.</u>	

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 3

I. SITE INFORMATION	
Site name: <i>Camp Ravenna Joint Military Training Center Load Line 3 (RVAAP-10)</i>	Date of inspection: <i>August 10, 2016</i>
Location and Region: <i>Portage and Trumbull Counties Ohio</i>	EPA ID: <i>OH5210020736 (CERCLIS)</i>
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>	Weather/temperature: <i>~90°F, partly cloudy, humid</i>
Remedy Includes: (Check all that apply) <div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <input type="checkbox"/> Landfill cover/containment <input type="checkbox"/> Access controls <input type="checkbox"/> Institutional controls <input type="checkbox"/> Groundwater pump and treatment <input type="checkbox"/> Surface water collection and treatment </div> <div style="width: 50%;"> <input type="checkbox"/> Monitored natural attenuation <input type="checkbox"/> Groundwater containment <input type="checkbox"/> Vertical barrier walls </div> </div> <input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim Record of Decision for the Remediation of Soils at Load Lines 1 Through 4 at the Ravenna Army Ammunition Plant (January 2007) (Interim ROD). Groundwater monitoring is required.</u>	
Attachments: <input type="checkbox"/> Inspection team roster attached <input checked="" type="checkbox"/> Site map attached (Attachment 1)	
II. INTERVIEWS (Check all that apply)	
1. O&M site manager <u>Al Brillinger (Vista Environmental Services)</u> Program Manager <u>11/07/16</u> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Name Title Date </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email Phone no. <u>(502) 315-6892</u> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Problems, suggestions; <input checked="" type="checkbox"/> Report attached _____ </div>	
2. O&M staff _____ _____ _____ <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Name Title Date </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone Phone no. _____ </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Problems, suggestions; <input type="checkbox"/> Report attached _____ </div>	
3. Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply. Agency <u>Ohio Environmental Protection Agency</u> Contact <u>Rodney Beals</u> _____ _____ <u>(330) 963-1218</u> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Name Title Date Phone no. </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Problems; suggestions; <input checked="" type="checkbox"/> Report attached _____ </div>	
4. Other interviews (optional) <input checked="" type="checkbox"/> Reports attached. (Attachment 6)	
<ul style="list-style-type: none"> Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager 	
<ul style="list-style-type: none"> Kevin Sedlak, National Guard Bureau, Restoration Project Manager 	
<ul style="list-style-type: none"> Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2 	

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 3

•	Gregory Moore, USACE Louisville District Project Manager			
•	Nathaniel Peters, USACE Louisville District Environmental Engineer			
•	Angela Schmidt, USACE Louisville District Risk Assessor			
•	Allan Brillinger, Vista Environmental Sciences Program Manager			
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA			
•	Tom Tadsen, RAB Co-Chair			
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)				
1.	O&M Documents <input type="checkbox"/> O&M manual <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Maintenance logs <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Remedial action completion drawings are provided in <i>Final Remedial Action Completion Report for the Remediation of Soils and Dry Sediments at RVAAP 08-11 (Load Lines 1-4) (June 2008)</i> and <i>Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-09 Load Line 2, RVAAP-10 Load Line 3, and RVAAP-11, Load Line 4 (December 17, 2010)</i>.</u>			
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>			
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks : _____			
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Groundwater monitoring at Camp Ravenna is performed on a facility-wide basis. The most recent available report is <i>Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Report on the March 2015 Sampling Event Former Ravenna Army Ammunition Plant Portage and Trumbull Counties, Ohio (September 21, 2015)</i>.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 3

8.	Leachate Extraction Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
9.	Discharge Compliance Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Air <input type="checkbox"/> Water (effluent)		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
10.	Daily Access/Security Logs	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
IV. O&M COSTS				
1.	O&M Organization			
<input type="checkbox"/> State in-house <input type="checkbox"/> Contractor for State <input type="checkbox"/> PRP in-house <input type="checkbox"/> Contractor for PRP <input type="checkbox"/> Federal Facility in-house <input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation) <input type="checkbox"/> Other: _____				
2.	O&M Cost Records			
<input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> Funding mechanism/agreement in place Original O&M cost estimate: _____ <input type="checkbox"/> Breakdown attached Total annual cost by year for review period if available <u>(not available)</u>				
3.	Unanticipated or Unusually High O&M Costs During Review Period			
Describe costs and reasons: <u>Not applicable</u>				
V. ACCESS AND INSTITUTIONAL CONTROLS <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A				
A. Fencing				
1.	Fencing damaged	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Gates secured	<input type="checkbox"/> N/A
Remarks: <u>Access controls are not part of the remedy. Load Line 3 is surrounded by a chain link fence with locked gate. The fence appears to be intact, although some isolated areas are in poor condition and show signs of distress. Camp Ravenna is surrounded by a perimeter fence that consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. Annual LUC inspection reports for Winklepeck Burning Grounds and Ramsdell Quarry Landfill document any major defects in the perimeter fence and actions taken to repair the defects.</u>				

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 3

B. Other Access Restrictions			
1.	Signs and other security measures	<input type="checkbox"/> Location shown on site map	<input type="checkbox"/> N/A
Remarks: <u>Access controls are not part of the remedy. The Load Line 3 fence is absent at a former Gate House building. Access at this location is restricted using warning signs and a cable barricade with reflective tape markers. Warning signs restricting access are also posted at the site entrance gate.</u>			
C. Institutional Controls (ICs)			
1.	Implementation and enforcement		
	Site conditions imply ICs not properly implemented	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Site conditions imply ICs not being fully enforced	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Type of monitoring (e.g., self-reporting, drive by)	<u>None</u>	
	Frequency		
	Responsible party/agency		
	Contact		
	Name	Title	Phone no.
	Reporting is up-to-date	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Reports are verified by the lead agency	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Specific requirements in deed or decision documents have been met	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Violations have been reported	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Other problems or suggestions: <input type="checkbox"/> Report attached		
	<u>ICs are not part of the remedy for Load Line 3.</u>		
2.	Adequacy	<input type="checkbox"/> ICs are adequate	<input type="checkbox"/> ICs are inadequate <input checked="" type="checkbox"/> N/A
D. General			
1.	Vandalism/trespassing	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> No vandalism evident
Remarks: _____			
2.	Land use changes on site	<input checked="" type="checkbox"/> N/A	
Remarks: <u>The site is not used for activities other than environmental monitoring, sampling, and remediation.</u>			
3.	Land use changes off site	<input checked="" type="checkbox"/> N/A	
Remarks: _____			
VI. GENERAL SITE CONDITIONS			
A. Roads	<input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A		
1.	Roads damaged	<input checked="" type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A
Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for range operations and environmental monitoring activities.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 3

B.	Other Site Conditions
Remarks	<u>The former buildings, including floor slabs, have been removed. Elevated concrete walkways between the former buildings remain in place. The site consists of open grass-covered areas and areas containing trees and brush. Monitoring wells are present.</u>
Note: Sections VII through IX were removed from this checklist because they are not applicable	
X. OTHER REMEDIES	
<p>If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction.</p> <p>Remarks : <u>There are no other remedies at the site.</u></p>	
XI. OVERALL OBSERVATIONS	
A.	Implementation of the Remedy
<p>Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.).</p> <p><u>The remedy was implemented to protect human health and the environment from exposure to contaminants (inorganics, explosives, PCBs, and SVOCs) attributed to former site operations associated with the assembly and demilitarization of large caliber projectiles, general-purpose bombs, and parts from these munitions. The remedy consisted of excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim ROD. Clean soils were backfilled in the excavations and graded. The former buildings, including floor slabs, were subsequently removed. The site inspection did not identify evidence of OHARNG use or trespass by the public. Groundwater monitoring is performed under a facility-wide program.</u></p> <p><u>The remedy is effective and functioning as designed.</u></p>	
B.	Adequacy of O&M
<p>Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy.</p> <p><u>Maintenance activities consist of keeping site gates closed, keeping site roads passable (i.e. snow plowing), culvert maintenance, mowing (once per year), and clearing vegetation. Inspection and maintenance of building slabs, prescribed in the Interim ROD, is no longer required because the slabs and contaminated soil beneath the slabs were removed and disposed offsite.</u></p> <p><u>Monitoring activities consist of quarterly sampling and analysis of groundwater for VOCs, SVOCs, PCBs, pesticides, explosives, propellants, inorganics, and cyanide. All monitoring wells are properly secured/locked, in good condition, and routinely sampled. Subsequent sampling and analysis has been conducted to evaluate the presence and extent of contamination in sub slab soils and underground utility lines.</u></p>	

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 3

C.	Early Indicators of Potential Remedy Problems
Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future.	
<u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u>	
D.	Opportunities for Optimization
Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy.	
<u>Opportunities for optimization were not identified.</u>	

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 4

I. SITE INFORMATION			
Site name: <i>Camp Ravenna Joint Military Training Center Load Line 4 (RVAAP-11)</i>		Date of inspection: <i>August 10, 2016</i>	
Location and Region: <i>Portage and Trumbull Counties Ohio</i>		EPA ID: <i>OH5210020736 (CERCLIS)</i>	
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>		Weather/temperature: <i>~90°F, partly cloudy, humid</i>	
Remedy Includes: (Check all that apply) <div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <input type="checkbox"/> Landfill cover/containment <input type="checkbox"/> Access controls <input type="checkbox"/> Institutional controls <input type="checkbox"/> Groundwater pump and treatment <input type="checkbox"/> Surface water collection and treatment <input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim Record of Decision for the Remediation of Soils at Load Lines 1 Through 4 at the Ravenna Army Ammunition Plant (January 2007) (Interim ROD). Groundwater monitoring is required.</u> </div> <div style="width: 50%;"> <input type="checkbox"/> Monitored natural attenuation <input type="checkbox"/> Groundwater containment <input type="checkbox"/> Vertical barrier walls </div> </div>			
Attachments: <input type="checkbox"/> Inspection team roster attached <input checked="" type="checkbox"/> Site map attached (Attachment 1)			
II. INTERVIEWS (Check all that apply)			
1.	O&M site manager	<u>Al Brillinger (Vista Environmental Services)</u> <div style="display: flex; justify-content: space-between; font-size: small;"> Name Title Date </div>	<u>Program Manager</u> <div style="display: flex; justify-content: space-between; font-size: small;"> Title Date </div>
Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email Phone no. <u>(502) 315-6892</u> Problems, suggestions; <input checked="" type="checkbox"/> Report attached _____ _____			
2.	O&M staff	_____ <div style="display: flex; justify-content: space-between; font-size: small;"> Name Title Date </div>	_____ <div style="display: flex; justify-content: space-between; font-size: small;"> Title Date </div>
Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone Phone no. _____ Problems, suggestions; <input type="checkbox"/> Report attached _____ _____			
3.	Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply. Agency <u>Ohio Environmental Protection Agency</u> Contact <u>Rodney Beals</u> _____ <u>(330) 963-1218</u> <div style="display: flex; justify-content: space-between; font-size: small;"> Name Title Date Phone no. </div> Problems; suggestions; <input checked="" type="checkbox"/> Report attached _____ _____		
4.	Other interviews (optional) <input checked="" type="checkbox"/> Reports attached. (Attachment 6)		
<ul style="list-style-type: none"> Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager 			
<ul style="list-style-type: none"> Kevin Sedlak, National Guard Bureau, Restoration Project Manager 			
<ul style="list-style-type: none"> Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2 			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 4

•	Gregory Moore, USACE Louisville District Project Manager
•	Nathaniel Peters, USACE Louisville District Environmental Engineer
•	Angela Schmidt, USACE Louisville District Risk Assessor
•	Allan Brillinger, Vista Environmental Sciences Program Manager
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA
•	Tom Tadsen, RAB Co-Chair
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)	
1.	O&M Documents <input type="checkbox"/> O&M manual <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Maintenance logs <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Remedial action completion drawings are provided in <i>Final Remedial Action Completion Report for the Remediation of Soils and Dry Sediments at RVAAP 08-11 (Load Lines 1-4) (June 2008)</i> and <i>Final Remedial Action Completion Report Sub-Slab Soils at RVAAP-09 Load Line 2, RVAAP-10 Load Line 3, and RVAAP-11, Load Line 4 (December 17, 2010)</i>.</u>
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks : _____
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Groundwater monitoring at Camp Ravenna is performed on a facility-wide basis. The most recent available report is <i>Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Report on the March 2015 Sampling Event Former Ravenna Army Ammunition Plant Portage and Trumbull Counties, Ohio (September 21, 2015)</i>.</u>

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 4

8.	Leachate Extraction Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
9.	Discharge Compliance Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Air		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Water (effluent)		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
10.	Daily Access/Security Logs	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
IV. O&M COSTS				
1.	O&M Organization			
<input type="checkbox"/> State in-house		<input type="checkbox"/> Contractor for State		
<input type="checkbox"/> PRP in-house		<input type="checkbox"/> Contractor for PRP		
<input type="checkbox"/> Federal Facility in-house		<input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation)		
<input type="checkbox"/> Other: _____				
2.	O&M Cost Records			
<input type="checkbox"/> Readily available		<input type="checkbox"/> Up to date		
<input type="checkbox"/> Funding mechanism/agreement in place				
Original O&M cost estimate: _____		<input type="checkbox"/> Breakdown attached		
Total annual cost by year for review period if available <u>(not available)</u>				
3.	Unanticipated or Unusually High O&M Costs During Review Period			
Describe costs and reasons: <u>Not applicable</u>				
V. ACCESS AND INSTITUTIONAL CONTROLS <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A				
A.	Fencing			
1.	Fencing damaged	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Gates secured	<input type="checkbox"/> N/A
Remarks: <u>Access controls are not part of the remedy. Load Line 4 is surrounded by a chain link fence with locked gate. The fence appears to be intact, although some isolated areas are in poor condition and show signs of distress. Camp Ravenna is surrounded by a perimeter fence that consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. Annual LUC inspection reports for Winklepeck Burning Grounds and Ramsdell Quarry Landfill document any major defects in the perimeter fence and actions taken to repair the defects.</u>				

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 4

B. Other Access Restrictions			
1.	Signs and other security measures	<input type="checkbox"/> Location shown on site map	<input type="checkbox"/> N/A
Remarks: <u>Warning signs restricting access are also posted at the site entrance gate.</u>			
C. Institutional Controls (ICs)			
1.	Implementation and enforcement		
	Site conditions imply ICs not properly implemented	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Site conditions imply ICs not being fully enforced	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Type of monitoring (e.g., self-reporting, drive by)	<u>None</u>	
	Frequency		
	Responsible party/agency		
	Contact		
		Name	Title
		Phone no.	
	Reporting is up-to-date	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Reports are verified by the lead agency	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Specific requirements in deed or decision documents have been met	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Violations have been reported	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Other problems or suggestions: <input type="checkbox"/> Report attached		
	<u>ICs are not part of the remedy for Load Line 4.</u>		
2.	Adequacy	<input type="checkbox"/> ICs are adequate	<input type="checkbox"/> ICs are inadequate <input checked="" type="checkbox"/> N/A
D. General			
1.	Vandalism/trespassing	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> No vandalism evident
Remarks: _____			
2.	Land use changes on site	<input checked="" type="checkbox"/> N/A	
Remarks: <u>The site is not used for activities other than environmental monitoring, sampling, and remediation.</u>			
3.	Land use changes off site	<input checked="" type="checkbox"/> N/A	
Remarks: _____			
VI. GENERAL SITE CONDITIONS			
A.	Roads	<input checked="" type="checkbox"/> Applicable	<input type="checkbox"/> N/A
1.	Roads damaged	<input checked="" type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A
Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for range operations and environmental monitoring activities.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 4

B.	Other Site Conditions
Remarks	<u>The former buildings, including floor slabs, have been removed. Elevated concrete walkways between the former buildings remain in place. The site consists of open grass-covered areas and areas containing trees and brush. Monitoring wells are present.</u>
Note: Sections VII through IX were removed from this checklist because they are not applicable	
X. OTHER REMEDIES	
<p>If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction.</p> <p>Remarks : <u>There are no other remedies at the site.</u></p>	
XI. OVERALL OBSERVATIONS	
A.	Implementation of the Remedy
<p>Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.).</p> <p><u>The remedy was implemented to protect human health and the environment from exposure to contaminants (inorganics, explosives, PCBs, and SVOCs) attributed to former site operations associated with the assembly and demilitarization of large caliber projectiles, general-purpose bombs, and parts from these munitions. The remedy consisted of excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Interim ROD. Clean soils were backfilled in the excavations and graded. The former buildings, including floor slabs, were subsequently removed. The site inspection did not identify evidence of OHARNG use or trespass by the public. Groundwater monitoring is performed under a facility-wide program.</u></p> <p><u>The remedy is effective and functioning as designed.</u></p>	
B.	Adequacy of O&M
<p>Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy.</p> <p><u>Maintenance activities consist of keeping site gates closed, keeping site roads passable (i.e. snow plowing), culvert maintenance, mowing (once per year), and clearing vegetation. Inspection and maintenance of building slabs, prescribed in the Interim ROD, is no longer required because the slabs and contaminated soil beneath the slabs were removed and disposed offsite.</u></p> <p><u>Monitoring activities consist of quarterly sampling and analysis of groundwater for VOCs, SVOCs, PCBs, pesticides, explosives, propellants, inorganics, and cyanide. All monitoring wells are properly secured/locked, in good condition, and routinely sampled. Subsequent sampling and analysis has been conducted to evaluate the presence and extent of contamination in sub slab soils and underground utility lines.</u></p>	

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 4

C.	Early Indicators of Potential Remedy Problems
Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future.	
<u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u>	
D.	Opportunities for Optimization
Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy.	
<u>Opportunities for optimization were not identified.</u>	

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 12

I. SITE INFORMATION	
Site name: <i>Camp Ravenna Joint Military Training Center Load Line 12 (RVAAP-12)</i>	Date of inspection: <i>August 10, 2016</i>
Location and Region: <i>Portage and Trumbull Counties Ohio</i>	EPA ID: <i>OH5210020736 (CERCLIS)</i>
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>	Weather/temperature: <i>~90°F, partly cloudy, humid</i>
Remedy Includes: (Check all that apply) <div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <input type="checkbox"/> Landfill cover/containment <input checked="" type="checkbox"/> Access controls <input checked="" type="checkbox"/> Institutional controls <input type="checkbox"/> Groundwater pump and treatment <input type="checkbox"/> Surface water collection and treatment <input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated surface and subsurface soil and dry sediment that exceeded cleanup goals identified in the Final Record of Decision for Soil and Dry Sediment for the RVAAP12 Load Line 12 (March 2009) (ROD).</u> </div> <div style="width: 50%;"> <input type="checkbox"/> Monitored natural attenuation <input type="checkbox"/> Groundwater containment <input type="checkbox"/> Vertical barrier walls </div> </div>	
Attachments: <input type="checkbox"/> Inspection team roster attached <input checked="" type="checkbox"/> Site map attached (Attachment 1)	
II. INTERVIEWS (Check all that apply)	
1. O&M site manager <u>Al Brillinger (Vista Environmental Services)</u> <u>Program Manager</u> <u>11/07/16</u> <div style="display: flex; justify-content: space-between; margin-top: -10px;"> Name Title Date </div> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email Phone no. <u>(502) 315-6892</u> Problems, suggestions; <input checked="" type="checkbox"/> Report attached _____ _____	
2. O&M staff _____ _____ _____ <div style="display: flex; justify-content: space-between; margin-top: -10px;"> Name Title Date </div> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone Phone no. _____ Problems, suggestions; <input type="checkbox"/> Report attached _____ _____	
3. Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply. Agency <u>Ohio Environmental Protection Agency</u> Contact <u>Rodney Beals</u> _____ <u>(330) 963-1218</u> <div style="display: flex; justify-content: space-between; margin-top: -10px;"> Name Title Date Phone no. </div> Problems; suggestions; <input checked="" type="checkbox"/> Report attached _____ _____	
4. Other interviews (optional) <input checked="" type="checkbox"/> Reports attached. (Attachment 6)	
<ul style="list-style-type: none"> • Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager 	
<ul style="list-style-type: none"> • Kevin Sedlak, National Guard Bureau, Restoration Project Manager 	
<ul style="list-style-type: none"> • Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2 	

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 12

•	Gregory Moore, USACE Louisville District Project Manager			
•	Nathaniel Peters, USACE Louisville District Environmental Engineer			
•	Angela Schmidt, USACE Louisville District Risk Assessor			
•	Allan Brillinger, Vista Environmental Sciences Program Manager			
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA			
•	Tom Tadsen, RAB Co-Chair			
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)				
1.	O&M Documents <input type="checkbox"/> O&M manual <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Maintenance logs <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Remedial action completion drawings are provided in <i>Final Remedial Action Report for the RVAAP-12 Load Line 12 (August 9, 2010)</i>.</u>			
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>			
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks : _____			
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Groundwater monitoring at Camp Ravenna is performed on a facility-wide basis. The most recent available report is <i>Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Report on the March 2015 Sampling Event Former Ravenna Army Ammunition Plant Portage and Trumbull Counties, Ohio (September 21, 2015)</i>.</u>			
8.	Leachate Extraction Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____			

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 12

9.	Discharge Compliance Records <input type="checkbox"/> Air <input type="checkbox"/> Water (effluent) Remarks: _____	<input type="checkbox"/> Readily available <input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date <input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> N/A
10.	Daily Access/Security Logs Remarks: <u>Daily access/security logs are not maintained.</u>	<input type="checkbox"/> Readily available <input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date <input type="checkbox"/> Up to date	<input type="checkbox"/> N/A <input type="checkbox"/> N/A
IV. O&M COSTS				
1.	O&M Organization <input type="checkbox"/> State in-house <input type="checkbox"/> PRP in-house <input type="checkbox"/> Federal Facility in-house <input type="checkbox"/> Other: _____			
	<input type="checkbox"/> Contractor for State <input type="checkbox"/> Contractor for PRP <input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation)			
2.	O&M Cost Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> Funding mechanism/agreement in place Original O&M cost estimate: <u>Not applicable</u> <input type="checkbox"/> Breakdown attached Total annual cost by year for review period if available <u>(not available)</u>			
3.	Unanticipated or Unusually High O&M Costs During Review Period Describe costs and reasons: <u>Not applicable</u>			
V. ACCESS AND INSTITUTIONAL CONTROLS <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A				
A. Fencing				
1.	Fencing damaged <input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Gates secured <input type="checkbox"/> N/A Remarks: <u>Load Line 12 is surrounded by a chain link fence with locked gate. The fence appears to be intact, although some isolated areas are in poor condition and show signs of distress. Camp Ravenna is surrounded by a perimeter fence that consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. Annual LUC inspection reports for Winklepeck Burning Grounds and Ramsdell Quarry Landfill document any major defects in the perimeter fence and actions taken to repair the defects.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 12

B. Other Access Restrictions			
1.	Signs and other security measures	<input type="checkbox"/> Location shown on site map	<input type="checkbox"/> N/A
Remarks: <u>Warning signs restricting access are also posted at the site entrance gate.</u>			
C. Institutional Controls (ICs)			
1.	Implementation and enforcement		
	Site conditions imply ICs not properly implemented	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> N/A
	Site conditions imply ICs not being fully enforced	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> N/A
	Type of monitoring (e.g., self-reporting, drive by)	<u>None</u>	
	Frequency		
	Responsible party/agency	<u>Vista Sciences Corporation</u>	
	Contact	<u>Al Brillinger</u>	<u>Program Manager</u> <u>(502) 315-6892</u>
		Name	Title Phone no.
	Reporting is up-to-date	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> N/A
	Reports are verified by the lead agency	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> N/A
	Specific requirements in deed or decision documents have been met	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> N/A
	Violations have been reported	<input type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> N/A
	Other problems or suggestions: <input type="checkbox"/> Report attached		
	<u>The site is not being used.</u>		
2.	Adequacy	<input checked="" type="checkbox"/> ICs are adequate	<input type="checkbox"/> ICs are inadequate <input type="checkbox"/> N/A
D. General			
1.	Vandalism/trespassing	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> No vandalism evident
Remarks: _____			
2.	Land use changes on site	<input checked="" type="checkbox"/> N/A	
Remarks: <u>The site is not used for activities other than environmental monitoring, sampling, and remediation.</u>			
3.	Land use changes off site	<input checked="" type="checkbox"/> N/A	
Remarks: _____			
VI. GENERAL SITE CONDITIONS			
A. Roads	<input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A		
1.	Roads damaged	<input checked="" type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A
Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for range operations and environmental monitoring activities.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Load Line 12

B.	Other Site Conditions
Remarks <u>The former buildings, including floor slabs, have been removed. Elevated concrete walkways between the former buildings remain in place. The site consists of open grass-covered areas and areas containing trees and brush. Monitoring wells are present.</u>	
Note: Sections VII through IX were removed from this checklist because they are not applicable	
X. OTHER REMEDIES	
If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction. Remarks : <u>There are no other remedies at the site.</u>	
XI. OVERALL OBSERVATIONS	
A.	Implementation of the Remedy
Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.). <u>The remedy was implemented to protect human health and the environment from actual or potential exposure to arsenic in soil and dry sediment. The remedy consisted of excavation and off-site disposal of contaminated soil and dry sediment from a ditch on the eastern end of the site that contained arsenic at concentrations above the cleanup goal identified in the ROD. Clean soils were backfilled in the remediated area and graded. Engineering controls consist of a perimeter fence with warning signs. Access by the general public is restricted by a Camp Ravenna facility-wide perimeter fence and security gates. The site inspection did not identify evidence of trespass or OHARNG training.</u> <u>The remedy is effective and functioning as designed.</u>	
B.	Adequacy of O&M
Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy. <u>Maintenance activities consist of keeping site gates closed, keeping site roads passable (i.e. snow plowing), culvert maintenance, mowing (once per year), and clearing vegetation. Inspection and maintenance of building slabs, prescribed in the Interim ROD, is no longer required because the slabs and contaminated soil beneath the slabs were removed and disposed offsite.</u> <u>Monitoring activities consist of quarterly sampling and analysis of groundwater for VOCs, SVOCs, PCBs, pesticides, explosives, propellants, inorganics, and cyanide. All monitoring wells are properly secured/locked, in good condition, and routinely sampled. Subsequent sampling and analysis has been conducted to evaluate the presence and extent of contamination in in soil and dry sediment and underground utility lines (to address data gaps).</u>	
C.	Early Indicators of Potential Remedy Problems
Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future. <u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u>	

Five-Year Review Site Inspection Checklist

Camp Ravenna, Load Line 12

D. Opportunities for Optimization
Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy. <u>Opportunities for optimization were not identified.</u>

Five-Year Review Site Inspection Checklist

Camp Ravenna, Winklepeck Burning Grounds

I. SITE INFORMATION	
Site name: <i>Camp Ravenna Joint Military Training Center Winklepeck Burning Grounds (RVAAP-05)</i>	Date of inspection: <i>August 10, 2016</i>
Location and Region: <i>Portage and Trumbull Counties Ohio</i>	EPA ID: <i>OH5210020736 (CERCLIS)</i>
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>	Weather/temperature: <i>~80°F, partly cloudy, humid</i>
Remedy Includes: (Check all that apply) <div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <input type="checkbox"/> Landfill cover/containment <input checked="" type="checkbox"/> Access controls <input checked="" type="checkbox"/> Institutional controls <input type="checkbox"/> Groundwater pump and treatment <input type="checkbox"/> Surface water collection and treatment <input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated soils and dry sediment that exceeded cleanup goals identified in the Final Record of Decision for Soil and Dry Sediment at the RVAAP-05 Winklepeck Burning Grounds at the Ravenna Army Ammunition Plant (August 2008) (ROD)</u> </div> <div style="width: 50%;"> <input type="checkbox"/> Monitored natural attenuation <input type="checkbox"/> Groundwater containment <input type="checkbox"/> Vertical barrier walls </div> </div>	
Attachments: <input type="checkbox"/> Inspection team roster attached <input checked="" type="checkbox"/> Site map attached (Attachment 1)	
II. INTERVIEWS (Check all that apply)	
1. O&M site manager <u>Al Brillinger (Vista Environmental Services)</u> <u>Program Manager</u> <u>11/07/16</u> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="text-align: center;">Name</div> <div style="text-align: center;">Title</div> <div style="text-align: center;">Date</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div>Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email</div> <div>Phone no. <u>(502) 315-6892</u></div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div>Problems, suggestions; <input checked="" type="checkbox"/> Report attached</div> <div>_____</div> </div>	
2. O&M staff _____ _____ _____ <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="text-align: center;">Name</div> <div style="text-align: center;">Title</div> <div style="text-align: center;">Date</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div>Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone</div> <div>Phone no. _____</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div>Problems, suggestions; <input type="checkbox"/> Report attached</div> <div>_____</div> </div>	
3. Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply. Agency <u>Ohio Environmental Protection Agency</u> Contact <u>Rodney Beals</u> _____ <u>(330) 963-1218</u> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div style="text-align: center;">Name</div> <div style="text-align: center;">Title</div> <div style="text-align: center;">Date</div> <div style="text-align: center;">Phone no.</div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <div>Problems; suggestions; <input checked="" type="checkbox"/> Report attached</div> <div>_____</div> </div>	
4. Other interviews (optional) <input checked="" type="checkbox"/> Reports attached. (Attachment 6)	
<ul style="list-style-type: none"> • Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager • Kevin Sedlak, National Guard Bureau, Restoration Project Manager 	

Five-Year Review Site Inspection Checklist Camp Ravenna, Winklepeck Burning Grounds

•	Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2
•	Gregory Moore, USACE Louisville District Project Manager
•	Nathaniel Peters, USACE Louisville District Environmental Engineer
•	Angela Schmidt, USACE Louisville District Risk Assessor
•	Allan Brillinger, Vista Environmental Sciences Program Manager
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA
•	Tom Tadsen, RAB Co-Chair
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)	
1.	O&M Documents <input checked="" type="checkbox"/> O&M manual (see remark 1) <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings (see remark 2) <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input checked="" type="checkbox"/> Maintenance logs (see remark 3) <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>1. Land use control (LUC) requirements are provided in Draft Property Management Plan for the Designated Areas of Concerns Ravenna Army Ammunition Plant Ravenna, Ohio (August 10, 2010). 2. Excavation drawings are provided in Final Remedial Action Completion Report for RVAAP-05 Winklepeck Burning Grounds Pads 61/61A, 67, and 70 (November 19, 2009). 3. LUC inspection results are provided in quarterly inspection reports and annual LUC monitoring reports.</u>
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Groundwater monitoring at Camp Ravenna is performed on a facility-wide basis. The most recent available report is Final Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Report on the March 2015 Sampling Event Former Ravenna Army Ammunition Plant Portage and Trumbull Counties, Ohio (September 21, 2015).</u>

Five-Year Review Site Inspection Checklist Camp Ravenna, Winklepeck Burning Grounds

8.	Leachate Extraction Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
9.	Discharge Compliance Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Air		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
<input type="checkbox"/> Water (effluent)		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
10.	Daily Access/Security Logs	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: <u>Winklepeck Burning Grounds (WBG) is used as a small arms range (including a Mark 19 Grenade Machine Gun Range) by the Army National Guard. Access is restricted due to range activities.</u>				
IV. O&M COSTS				
1.	O&M Organization			
<input type="checkbox"/> State in-house		<input type="checkbox"/> Contractor for State		
<input type="checkbox"/> PRP in-house		<input type="checkbox"/> Contractor for PRP		
<input type="checkbox"/> Federal Facility in-house		<input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation)		
<input type="checkbox"/> Other: _____				
2.	O&M Cost Records			
<input type="checkbox"/> Readily available		<input type="checkbox"/> Up to date		
<input type="checkbox"/> Funding mechanism/agreement in place				
Original O&M cost estimate: <u>Not available</u>		<input type="checkbox"/> Breakdown attached		
Total annual cost by year for review period if available (<u>not available</u>)				
3.	Unanticipated or Unusually High O&M Costs During Review Period			
Describe costs and reasons: <u>Not applicable</u>				
V. ACCESS AND INSTITUTIONAL CONTROLS <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A				
A. Fencing				
1.	Fencing damaged	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Gates secured	<input type="checkbox"/> N/A
Remarks: <u>There is no fence surrounding WBG. The only facility-wide engineering control is a perimeter fence for Camp Ravenna. It consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. The LUC inspection reports document any major defects in the perimeter fence and actions taken to repair the defects.</u>				
B. Other Access Restrictions				
1.	Signs and other security measures	<input type="checkbox"/> Location shown on site map	<input type="checkbox"/> N/A	
Remarks: <u>Signs (caution, impact area keep out) have been installed at 200 meter intervals.</u>				

Five-Year Review Site Inspection Checklist Camp Ravenna, Winklepeck Burning Grounds

C. Institutional Controls (ICs)			
1.	Implementation and enforcement Site conditions imply ICs not properly implemented <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> N/A Site conditions imply ICs not being fully enforced <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> N/A Type of monitoring (e.g., self-reporting, drive by) <u>Self-reporting</u> Frequency <u>Quarterly</u> Responsible party/agency <u>Camp Ravenna/OHARNG</u> Contact <u>Al Brillinger (Vista Sciences Corporation)</u> <u>Program Manager</u> <u>(502) 315-6892</u> <div style="text-align: center;">Name Title Phone no.</div>		
	Reporting is up-to-date <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Reports are verified by the lead agency <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Specific requirements in deed or decision documents have been met <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Violations have been reported <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Other problems or suggestions: <input type="checkbox"/> Report attached <u>LUC inspection reports (quarterly inspection reports and annual LUC monitoring reports) are documented in Attachment 2.</u>		
2.	Adequacy <input checked="" type="checkbox"/> ICs are adequate <input type="checkbox"/> ICs are inadequate <input type="checkbox"/> N/A 		
D. General			
1.	Vandalism/trespassing <input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> No vandalism evident Remarks: _____		
2.	Land use changes on site <input type="checkbox"/> N/A Remarks: <u>The site is not used for activities other than as a small arms and Mark 19 Grenade Machine Gum range, range maintenance, and environmental monitoring, sampling, and remediation.</u>		
3.	Land use changes off site <input checked="" type="checkbox"/> N/A Remarks: _____		
VI. GENERAL SITE CONDITIONS			
A.	Roads <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A		
1.	Roads damaged <input checked="" type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for range operations and environmental monitoring activities.</u>		
B.	Other Site Conditions Remarks: <u>The former WBG encompasses 211.66 acres in the central portion of Camp Ravenna. The site is open and used as a target range by OHARNG. Topography is gently undulating and elevations decrease from west to east. Gravel/dirt roads running east to west are tied together with connecting roads at the eastern and western ends of the site. There are no perennial streams. Monitoring wells are situated throughout the site.</u>		
Note: Sections VII through IX were removed from this checklist because they are not applicable			

Five-Year Review Site Inspection Checklist Camp Ravenna, Winklepeck Burning Grounds

X. OTHER REMEDIES
<p>If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction.</p> <p>Remarks : <u>There are no other remedies at the site.</u></p>
XI. OVERALL OBSERVATIONS
<p>A. Implementation of the Remedy</p> <p>Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.).</p> <p><u>The remedy was implemented to protect human health and the environment from exposure to contaminants attributed to former Ravenna Army Ammunition Plant operations at burning pads 61, 61A, 67, and 70. The selected remedy consisted of excavation and off-site disposal of approximately 5,965 cubic yards of soil and dry sediment and LUCs. It was implemented in 2009. An Explanation of Significant Differences (ESD) was prepared in 2015 to enable using the site as a Mark 19 Grenade Machine Gun Range. Implementation of the remedy was started in November 2016.</u></p> <p><u>The ROD remedy is effective and functioning as designed. The ESD remedy has not been completed.</u></p>
<p>B. Adequacy of O&M</p> <p>Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy.</p> <p><u>Range maintenance activities conducted by OHARNG consist of grass cutting, maintenance of targetry and associated mechanisms, and natural resources management activities.</u></p> <p><u>Monitoring activities consist of quarterly LUC inspections that include: 1) A review of LUC training and documentation as applicable to WBG, 2) Evaluation of the Camp Ravenna perimeter fence to ensure that it is maintained in a manner that is effective and deters trespassers, 3) Evaluation of activities at WBG to ensure that they are in compliance with OHARNG range safety regulations/standard operating procedures, established digging restrictions, and established exposure limits, and 4) Evaluation to ensure that groundwater activities are being conducted in a manner consistent with established LUCS.</u></p>
<p>C. Early Indicators of Potential Remedy Problems</p> <p>Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future.</p> <p><u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u></p>
<p>D. Opportunities for Optimization</p> <p>Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy.</p> <p><u>Opportunities for optimization were not identified.</u></p>

Five-Year Review Site Inspection Checklist Camp Ravenna, Ramsdell Quarry Landfill

I. SITE INFORMATION													
Site name: <i>Camp Ravenna Joint Military Training Center Ramsdell Quarry Landfill (RVAAP-01)</i>	Date of inspection: <i>August 10, 2016</i>												
Location and Region: <i>Portage and Trumbull Counties Ohio</i>	EPA ID: <i>OH5210020736 (CERCLIS)</i>												
Agency, office, or company leading the five-year review: <i>US Army Corps of Engineers, Buffalo District</i>	Weather/temperature: <i>~90°F, partly cloudy, humid</i>												
Remedy Includes: (Check all that apply) <table style="width: 100%; border: none;"> <tr> <td><input type="checkbox"/> Landfill cover/containment</td> <td><input type="checkbox"/> Monitored natural attenuation</td> </tr> <tr> <td><input checked="" type="checkbox"/> Access controls</td> <td><input type="checkbox"/> Groundwater containment</td> </tr> <tr> <td><input checked="" type="checkbox"/> Institutional controls</td> <td><input type="checkbox"/> Vertical barrier walls</td> </tr> <tr> <td><input type="checkbox"/> Groundwater pump and treatment</td> <td></td> </tr> <tr> <td><input type="checkbox"/> Surface water collection and treatment</td> <td></td> </tr> <tr> <td colspan="2"><input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated soil and dry sediment that exceeded cleanup goals identified in the Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell Quarry Landfill (March 2009) (ROD).</u></td> </tr> </table>		<input type="checkbox"/> Landfill cover/containment	<input type="checkbox"/> Monitored natural attenuation	<input checked="" type="checkbox"/> Access controls	<input type="checkbox"/> Groundwater containment	<input checked="" type="checkbox"/> Institutional controls	<input type="checkbox"/> Vertical barrier walls	<input type="checkbox"/> Groundwater pump and treatment		<input type="checkbox"/> Surface water collection and treatment		<input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated soil and dry sediment that exceeded cleanup goals identified in the Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell Quarry Landfill (March 2009) (ROD).</u>	
<input type="checkbox"/> Landfill cover/containment	<input type="checkbox"/> Monitored natural attenuation												
<input checked="" type="checkbox"/> Access controls	<input type="checkbox"/> Groundwater containment												
<input checked="" type="checkbox"/> Institutional controls	<input type="checkbox"/> Vertical barrier walls												
<input type="checkbox"/> Groundwater pump and treatment													
<input type="checkbox"/> Surface water collection and treatment													
<input checked="" type="checkbox"/> Other <u>Excavation and off-site disposal of contaminated soil and dry sediment that exceeded cleanup goals identified in the Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell Quarry Landfill (March 2009) (ROD).</u>													
Attachments: <input type="checkbox"/> Inspection team roster attached <input type="checkbox"/> Site map attached													
II. INTERVIEWS (Check all that apply)													
1. O&M site manager <u>Al Brillinger (Vista Environmental Services)</u> <u>Program Manager</u> <u>11/07/16</u> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Name Title Date </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input checked="" type="checkbox"/> by email Phone no. <u>(502) 315-6892</u> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Problems, suggestions; <input checked="" type="checkbox"/> Report attached _____ </div>													
2. O&M staff _____ _____ _____ <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Name Title Date </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Interviewed <input type="checkbox"/> at site <input type="checkbox"/> at office <input type="checkbox"/> by phone Phone no. _____ </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Problems, suggestions; <input type="checkbox"/> Report attached _____ </div>													
3. Local regulatory authorities and response agencies (i.e., State and Tribal offices, emergency response office, police department, office of public health or environmental health, zoning office, recorder of deeds, or other city and county offices, etc.) Fill in all that apply. <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Agency <u>Ohio Environmental Protection Agency</u> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Contact <u>Rodney Beals</u> <u>(330) 963-1218</u> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Name _____ Title _____ Date _____ Phone no. _____ </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> Problems; suggestions; <input checked="" type="checkbox"/> Report attached _____ </div>													
4. Other interviews (optional) <input checked="" type="checkbox"/> Reports attached.													
<ul style="list-style-type: none"> Mark Leeper, PG, MBA, Army National Guard Directorate, Environmental Cleanup Program Manager 													
<ul style="list-style-type: none"> Kevin Sedlak, National Guard Bureau, Restoration Project Manager 													

Five-Year Review Site Inspection Checklist Camp Ravenna, Ramsdell Quarry Landfill

•	Katie Tait, Ohio Army National Guard (OHARNG), Environmental Specialist 2
•	Gregory Moore, USACE Louisville District Project Manager
•	Nathaniel Peters, USACE Louisville District Environmental Engineer
•	Angela Schmidt, USACE Louisville District Risk Assessor
•	Allan Brillinger, Vista Environmental Sciences Program Manager
•	Rodney Beals, Sue Watkins, and Nicholas Roope, Ohio EPA
•	Tom Tadsen, RAB Co-Chair
III. ON-SITE DOCUMENTS & RECORDS VERIFIED (Check all that apply)	
1.	O&M Documents <input checked="" type="checkbox"/> O&M manual (see remark 1) <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input checked="" type="checkbox"/> As-built drawings (see remark 2) <input checked="" type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input type="checkbox"/> N/A <input checked="" type="checkbox"/> Maintenance logs (see remark 3) <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>1. Land use control (LUC) requirements are provided in <i>Final Remedial Design for Soil and Dry Sediment at RVAAP-01 Ramsdell Quarry Landfill</i>. 2. Extent of excavation drawings are provided in <i>Final Engineering Evaluation for Soil and Dry Sediment at RVAAP-01 Ramsdell Quarry Landfill (September 2, 2011)</i>. 3. LUC inspection results are provided in annual monitoring reports.</u>
2.	Site-Specific Health and Safety Plan <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A <input type="checkbox"/> Contingency plan/emergency response plan <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: <u>Draft Site Safety & Health Plan Camp Ravenna Environmental Program Support Services Portage and Trumbull Counties, Ohio (Vista Sciences Corporation, February 2, 2016).</u>
3.	O&M and OSHA Training Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
4.	Permits and Service Agreements <input type="checkbox"/> Air discharge permit <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Effluent discharge <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Waste disposal, POTW <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A <input type="checkbox"/> Other permits _____ <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
5.	Gas Generation Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
6.	Settlement Monument Records <input type="checkbox"/> Readily available <input type="checkbox"/> Up to date <input checked="" type="checkbox"/> N/A Remarks: _____
7.	Groundwater Monitoring Records <input checked="" type="checkbox"/> Readily available <input checked="" type="checkbox"/> Up to date <input type="checkbox"/> N/A Remarks: <u>Base line and quarterly monitoring has been conducted for VOCs, SVOCs, pesticides, PCBs, explosives, propellants, inorganics, cyanide, nitrate, and perchlorate.</u>

Five-Year Review Site Inspection Checklist Camp Ravenna, Ramsdell Quarry Landfill

8.	Leachate Extraction Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
9.	Discharge Compliance Records	<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	<input checked="" type="checkbox"/> N/A
Remarks: _____				
10.	Daily Access/Security Logs	<input checked="" type="checkbox"/> Readily available	<input checked="" type="checkbox"/> Up to date	<input type="checkbox"/> N/A
Remarks: _____				
IV. O&M COSTS				
1.	O&M Organization			
		<input type="checkbox"/> State in-house	<input type="checkbox"/> Contractor for State	
		<input type="checkbox"/> PRP in-house	<input type="checkbox"/> Contractor for PRP	
		<input type="checkbox"/> Federal Facility in-house	<input checked="" type="checkbox"/> Contractor for Federal Facility (Vista Sciences Corporation)	
		Other: _____		
2.	O&M Cost Records			
		<input type="checkbox"/> Readily available	<input type="checkbox"/> Up to date	
		<input type="checkbox"/> Funding mechanism/agreement in place		
		Original O&M cost estimate: _____		<input type="checkbox"/> Breakdown attached
		Total annual cost by year for review period if available (<u>not available</u>)		
3.	Unanticipated or Unusually High O&M Costs During Review Period			
Describe costs and reasons: <u>Not applicable</u>				
V. ACCESS AND INSTITUTIONAL CONTROLS				
		<input checked="" type="checkbox"/> Applicable	<input type="checkbox"/> N/A	
A.	Fencing			
1.	Fencing damaged	<input type="checkbox"/> Location shown on site map	<input checked="" type="checkbox"/> Gates secured	<input type="checkbox"/> N/A
Remarks: <u>Fencing at the Ramsdell Quarry Landfill consists of a chain-link security fence and five-strand, high tensile wire fence. The chain-link fabric is located on the Ramsdell Road side of the site and fastened to a top reinforcing wire and a bottom tension wire. Two locked double-swing steel chain-link gates are present along Ramsdell Road. The landfill fence was observed to be in good condition with no damage noted.</u>				
<u>A Camp Ravenna perimeter fence is also present. It consists of six feet high chain link fence fabric with steel I-beam shaped posts set on 10 to 12 feet centers set in concrete footers. LUC inspection reports document any major defects in the perimeter fence and actions taken to repair the defects.</u>				

Five-Year Review Site Inspection Checklist

Camp Ravenna, Ramsdell Quarry Landfill

B. Other Access Restrictions			
1.	Signs and other security measures	<input checked="" type="checkbox"/> Location shown on site map <input type="checkbox"/> N/A	
Remarks: <u>Warning signs (20" by 14") are located every 300 ft on the landfill perimeter fence, "KEEP OUT RESTRICTED ACCESS SITE AUTHORIZED PERSONNEL ONLY. DANGER ASBESTOS WASTE DISPOSAL SITE DO NOT CREATE DUST BREATHING ASBESTOS IS HAZARDOUS TO YOUR HEALTH."</u>			
C. Institutional Controls (ICs)			
1.	Implementation and enforcement Site conditions imply ICs not properly implemented <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> N/A Site conditions imply ICs not being fully enforced <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> N/A Type of monitoring (e.g., self-reporting, drive by) <u>Self-reporting</u> Frequency <u>Annual</u> Responsible party/agency <u>Camp Ravenna/OHARNG</u> Contact <u>Al Brillinger (Vista Sciences Corporation)</u> <u>Program Manager</u> <u>(502) 315-6892</u> <div style="display: flex; justify-content: space-between; margin-left: 100px;"> Name Title Phone no. </div> Reporting is up-to-date <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Reports are verified by the lead agency <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Specific requirements in deed or decision documents have been met <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> N/A Violations have been reported <input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> N/A Other problems or suggestions: <input type="checkbox"/> Report attached <u>LUC monitoring reports) are documented in Attachment 2.</u>		
2.	Adequacy	<input checked="" type="checkbox"/> ICs are adequate <input type="checkbox"/> ICs are inadequate <input type="checkbox"/> N/A	
D. General			
1.	Vandalism/trespassing	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> No vandalism evident	
Remarks: _____			
2.	Land use changes on site	<input checked="" type="checkbox"/> N/A	
Remarks: <u>The site is not used for activities other than landfill cap maintenance, environmental monitoring and sampling.</u>			
3.	Land use changes off site	<input checked="" type="checkbox"/> N/A	
Remarks: _____			
VI. GENERAL SITE CONDITIONS			
A. Roads	<input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A		
1.	Roads damaged	<input checked="" type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Roads adequate <input type="checkbox"/> N/A	
Remarks: <u>Camp Ravenna roads outside of the site consist of bituminous concrete pavement. Site roads are unpaved and adequate for range operations and environmental monitoring activities.</u>			

Five-Year Review Site Inspection Checklist Camp Ravenna, Ramsdell Quarry Landfill

B. Other Site Conditions			
Remarks <u>The Ramsdell Quarry Landfill encompasses approximately 14 acres. The land surface in a large portion of the landfill slopes into a former quarry, which is about 40 feet below the surrounding area. Surface water runoff collects in an isolated wetland on the bottom of the former quarry. There is no surface water drainage outlet from the quarry. The landfill has been closed and has a clay cap with topsoil/grass layer at surface. The cap is mowed. Monitoring wells are situated around the site.</u>			
VII. LANDFILL COVERS <input type="checkbox"/> Applicable <input checked="" type="checkbox"/> N/A <u>The Ramsdell Quarry Landfill has been closed under State of Ohio solid waste regulations and is covered. The landfill cover is not a component of the remedial action subject to this five-year review. Aspects of the landfill cover are identified below to provide information about site conditions.</u>			
A. Landfill Surface <input checked="" type="checkbox"/> Applicable <input type="checkbox"/> N/A			
1.	Settlement (Low spots) Areal extent _____ Depth _____ Remarks: _____	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Settlement not evident	
2.	Cracks Lengths _____ Widths _____ Depths _____ Remarks: _____	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Cracking not evident	
3.	Erosion Areal extent _____ Depth _____ Remarks : _____	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Erosion not evident	
4.	Holes Areal extent _____ Depth _____ Remarks : _____	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Holes not evident	
5.	Vegetative Cover <input type="checkbox"/> Grass <input type="checkbox"/> Cover properly established <input checked="" type="checkbox"/> No signs of stress <input type="checkbox"/> Trees/Shrubs (indicate size and locations on a diagram) Remarks: _____		
6.	Alternative Cover (armored rock, concrete, etc.) <input checked="" type="checkbox"/> N/A Remarks: _____		
7.	Bulges Areal extent _____ Height _____ Remarks: _____	<input type="checkbox"/> Location shown on site map <input checked="" type="checkbox"/> Bulges not evident	

A4-42

Five-Year Review Site Inspection Checklist Camp Ravenna, Ramsdell Quarry Landfill

F.	Cover Drainage Layer	<input type="checkbox"/> Applicable	<input checked="" type="checkbox"/> N/A
G.	Detention/Sedimentation Ponds	<input type="checkbox"/> Applicable	<input checked="" type="checkbox"/> N/A
H.	Retaining Walls	<input type="checkbox"/> Applicable	<input checked="" type="checkbox"/> N/A
I.	Perimeter Ditches/Off-Site Discharge	<input type="checkbox"/> Applicable	<input checked="" type="checkbox"/> N/A
VIII. VERTICAL BARRIER WALLS <input type="checkbox"/> Applicable <input checked="" type="checkbox"/> N/A			
IX. GROUNDWATER/SURFACE WATER REMEDIES <input type="checkbox"/> Applicable <input checked="" type="checkbox"/> N/A			
X. OTHER REMEDIES			
<p>If there are remedies applied at the site which are not covered above, attach an inspection sheet describing the physical nature and condition of any facility associated with the remedy. An example would be soil vapor extraction.</p> <p>Remarks : <u>There are no other remedies at the site. The landfill was closed in 1990 under State of Ohio solid waste regulations.</u></p>			
XI. OVERALL OBSERVATIONS			
A.	Implementation of the Remedy		
<p>Describe issues and observations relating to whether the remedy is effective and functioning as designed. Begin with a brief statement of what the remedy is to accomplish (i.e., to contain contaminant plume, minimize infiltration and gas emission, etc.).</p> <p><u>The remedy was implemented to protect human health and the environment from exposure to contaminants attributed to former landfilling operations. The selected remedy consisted of excavation and off-site disposal of approximately 423 cubic yards (<i>in-situ</i>) of soil and dry sediment. The remedy was not fully implemented because friable asbestos-containing material (ACM) was encountered during implementation of the remedy. A new remedy was implemented that consisted of 1) installation of a perimeter fence at the perimeter of the landfill to encompass the closed landfill, quarry bottom, and wetlands, and 2) implementing best management practices to remove surficial ACM through non-intrusive/no digging methods.</u></p> <p><u>The remedies are effective and functioning as designed.</u></p>			
B.	Adequacy of O&M		
<p>Describe issues and observations related to the implementation and scope of O&M procedures. In particular, discuss their relationship to the current and long-term protectiveness of the remedy.</p> <p><u>Maintenance activities consist of annual mowing of the landfill cap and monthly inspections by the Portage County Health Department.</u></p> <p><u>Monitoring activities consist of quarterly sampling and analysis of groundwater for VOCs, SVOCs, PCBs, pesticides, explosives, propellants, inorganics, cyanide, nitrate, and perchlorate. All monitoring wells are properly secured/locked and in good condition.</u></p>			
C.	Early Indicators of Potential Remedy Problems		
<p>Describe issues and observations such as unexpected changes in the cost or scope of O&M or a high frequency of unscheduled repairs that suggest that the protectiveness of the remedy may be compromised in the future.</p> <p><u>No issues or observations were identified that would suggest the protectiveness of the remedy may be compromised in the future.</u></p>			

Five-Year Review Site Inspection Checklist












Camp Ravenna, Ramsdell Quarry Landfill


D.	Opportunities for Optimization
Describe possible opportunities for optimization in monitoring tasks or the operation of the remedy.	
<u>None</u>	

ATTACHMENT 5
Photographic Record



Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS Us Community


<p> Photograph Location and Direction</p> <p> Fence Line</p> <p> Former Railroad</p>	<p> Roads</p> <p> Excavation Area</p> <p> Excavation Area (2010 - Not Included in Interm ROD)</p> <p> Area of Concern</p>	<p> Former Building/Structure</p>	<p></p> <p></p>	<p></p> <p>Document Name: LL_1_PhotoLoc.mxd Drawn By: H5TDEEMP Date Saved: 31 Oct 2016 Time Saved: 8:42:33 AM</p>	<p>Load Line #1 Photo Locations</p> <p>Camp Ravenna Portage and Trumbull Counties, Ohio</p>	<p>Figure A5 - 1</p>
---	---	---	---	--	--	----------------------

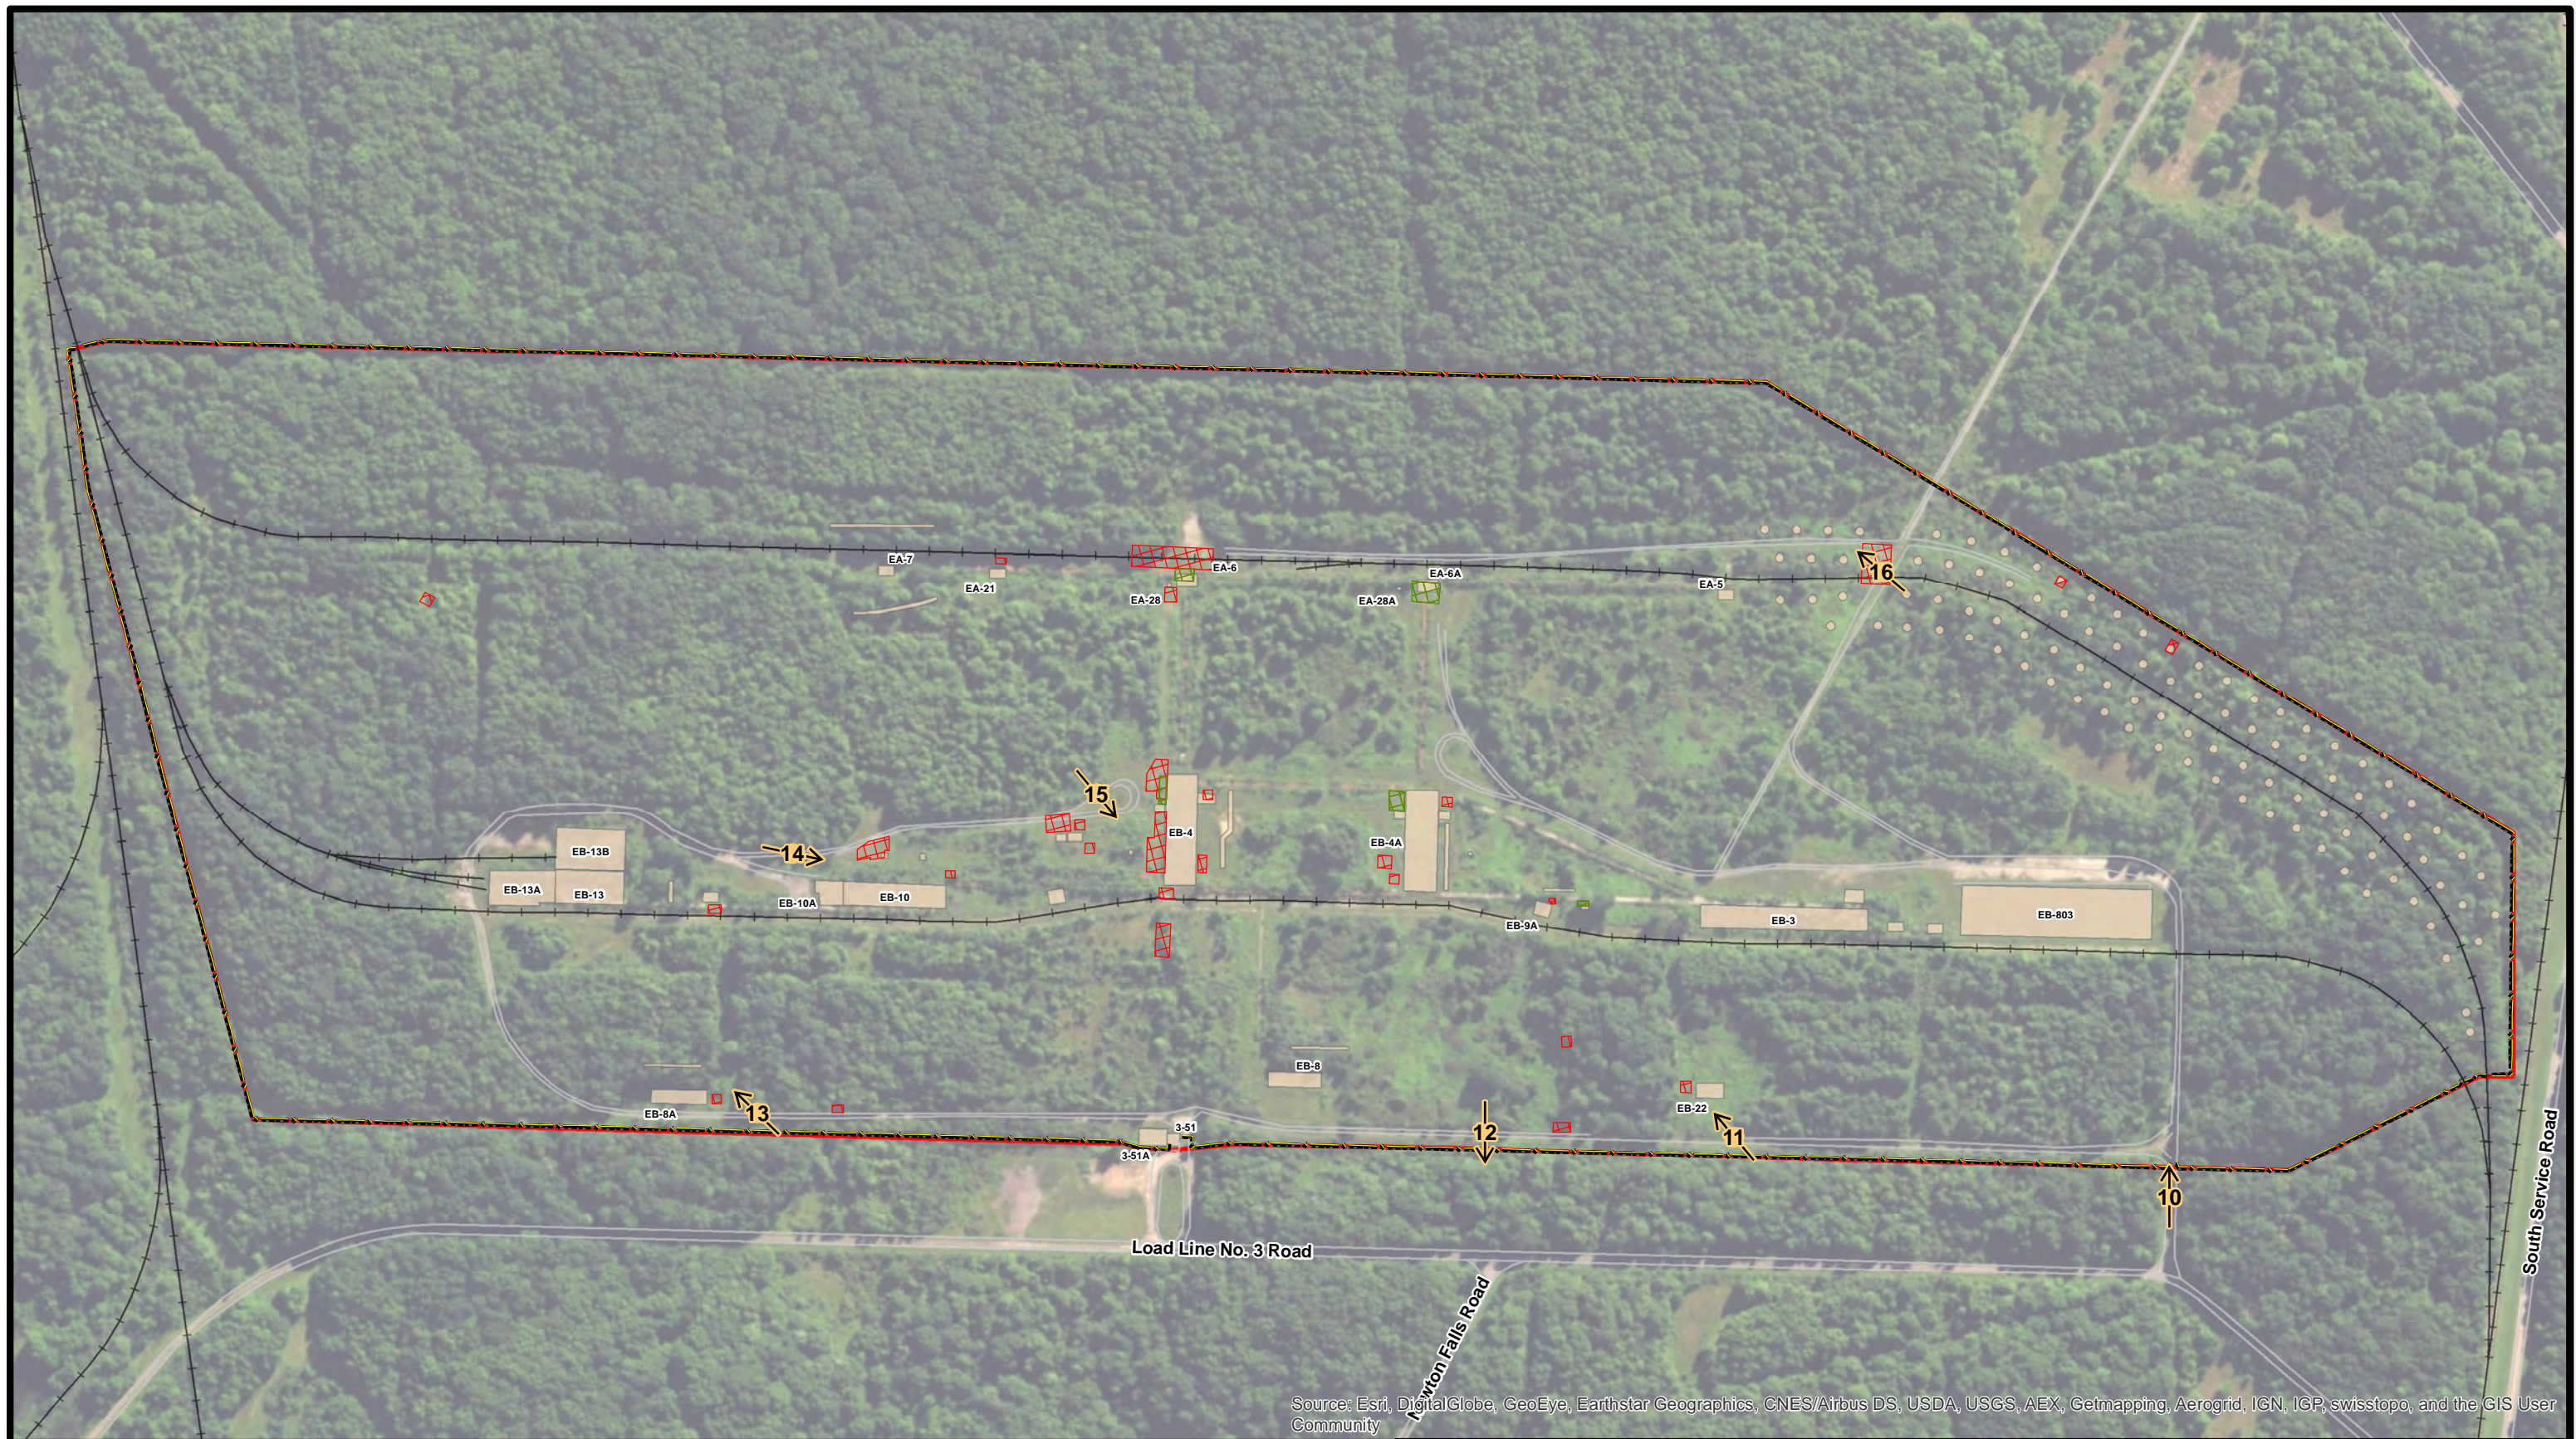

- Photograph Location and Direction
- Fence Line
- Former Railroad

- Roads
- Excavation Area
- Excavation Area (2010 - Not included in Interim ROD)
- Area of Concern

Former Building/Structure




Document Name: LL_3_PhotoLoc.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 8:59:21 AM




Load Line #3 Photo Locations



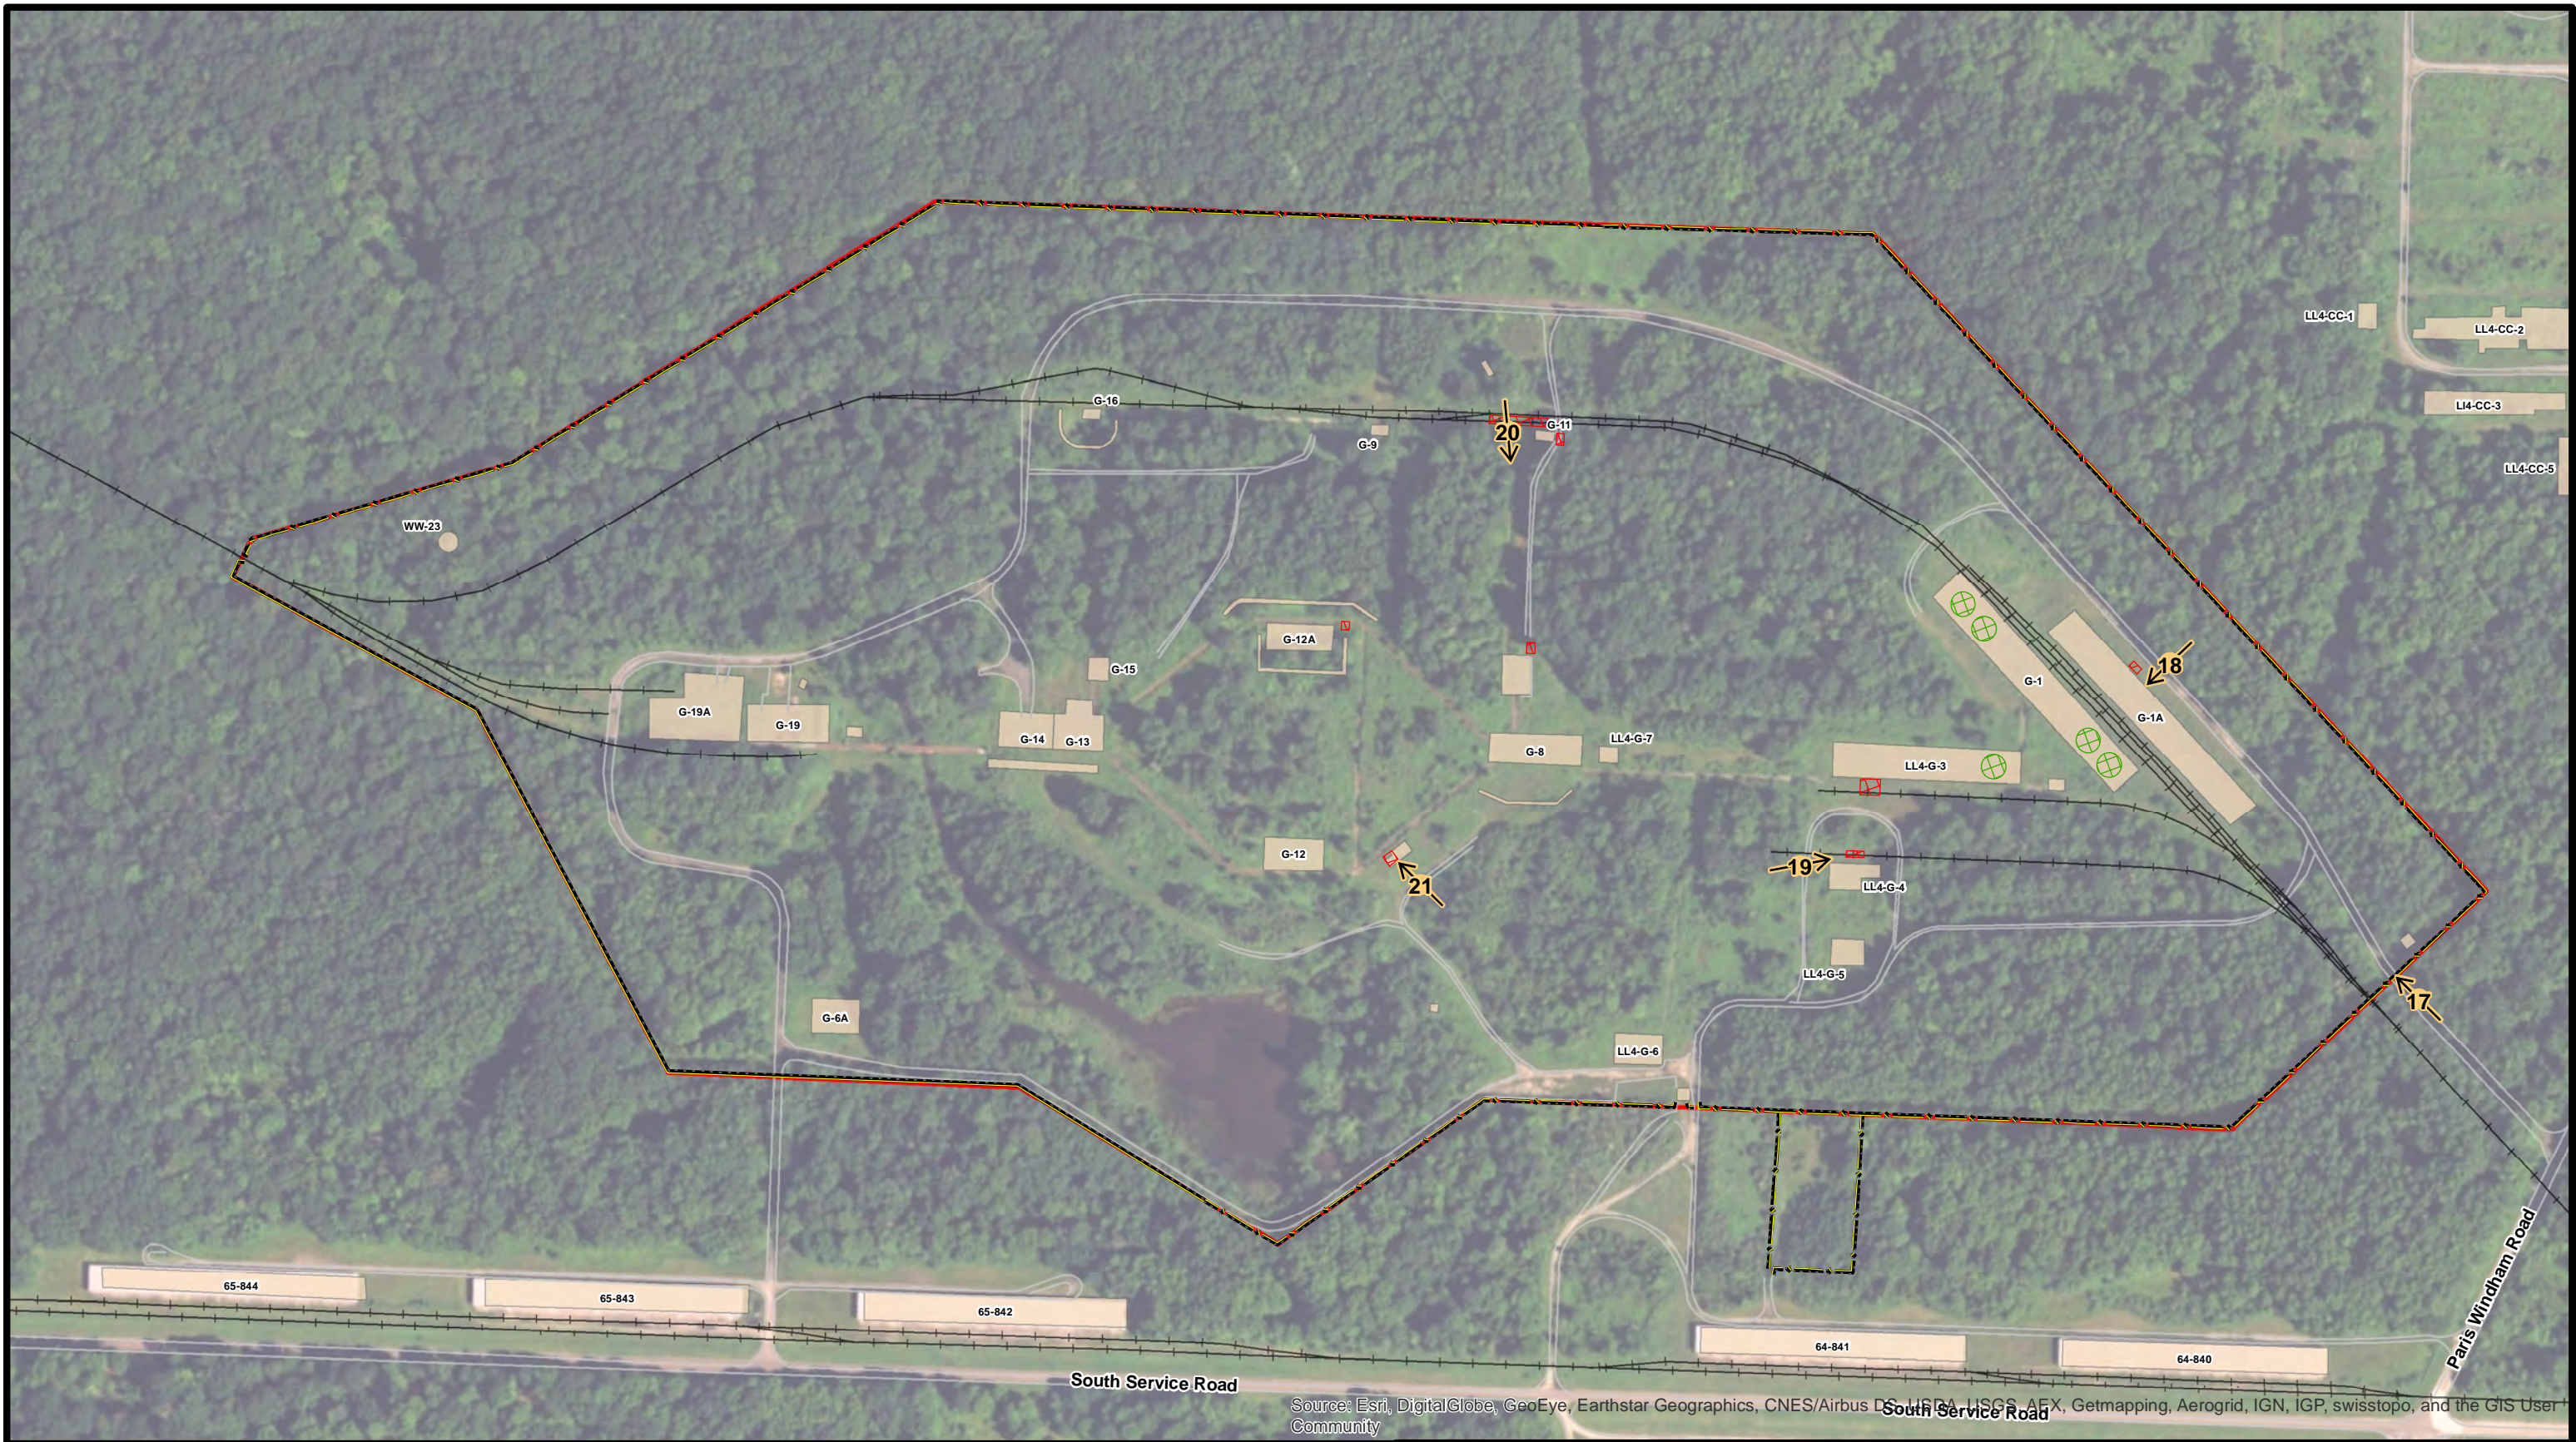

Camp Ravenna
Portage and Trumbull
Counties, Ohio


Figure A5-3




Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

-  Photograph Location and Direction
-  Fence Line
-  Former Railroad

-  Roads
-  Excavation Area
-  Soil Stockpile Area (2010 - Not Included in Interim ROD)
-  Area of Concern

-  Former Building/Structure

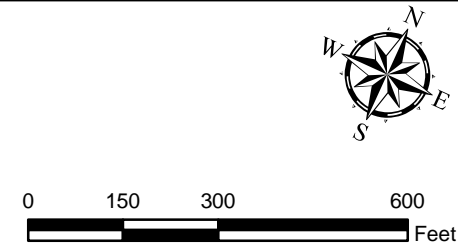









Document Name: LL_4_PhotoLoc.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 9:04:52 AM


Load Line #4 Photo Locations

Camp Ravenna
Portage and Trumbull
Counties, Ohio

Figure A5 - 4

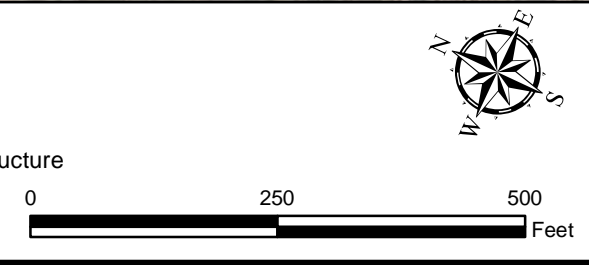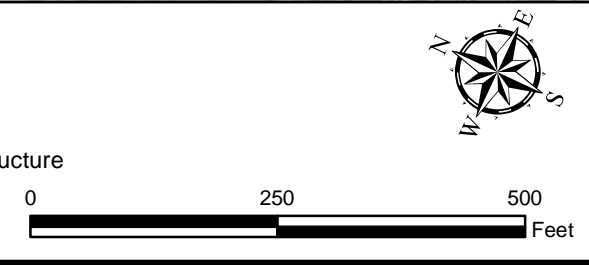

<div data-bbox="124 1703 1709 1955"><div data-bbox="124 1703 559 1955"><div data-bbox="124 1703 186 1955"></div><div data-bbox="217 1703 559 1955">Photograph Location and Direction</div></div><div data-bbox="590 1703 1087 1955"><div data-bbox="590 1703 652 1955"></div><div data-bbox="683 1703 1087 1955">Former Railroad</div></div><div data-bbox="590 1814 1087 1955"><div data-bbox="590 1814 652 1955"></div><div data-bbox="683 1814 1087 1955">Roads</div></div><div data-bbox="590 1874 1087 1955"><div data-bbox="590 1874 652 1955"></div><div data-bbox="683 1874 1087 1955">Excavation Area</div></div><div data-bbox="870 1703 1087 1955"><div data-bbox="870 1703 932 1955"></div><div data-bbox="963 1703 1087 1955">Area of Concern</div></div><div data-bbox="870 1814 1087 1955"><div data-bbox="870 1814 932 1955"></div><div data-bbox="963 1814 1087 1955">Former Building/Structure</div></div></div> <div data-bbox="1149 1703 1709 1955"><div data-bbox="1149 1703 1709 1955"><div data-bbox="1149 1703 1709 1955"></div><div data-bbox="1149 1703 1709 1955">0 250 500 Feet</div></div><div data-bbox="1149 1703 1709 1955"><div data-bbox="1149 1703 1709 1955"></div><div data-bbox="1149 1703 1709 1955">N W E S</div></div></div>

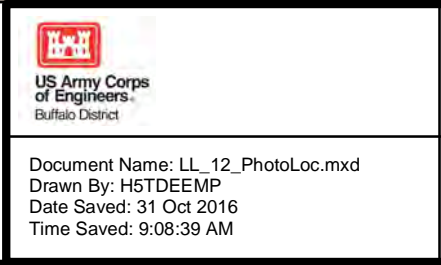

US Army Corps of Engineers
Buffalo District

Document Name: LL_12_PhotoLoc.mxd
Drawn By: H5TDEEMP
Date Saved: 31 Oct 2016
Time Saved: 9:08:39 AM


Load Line #12
Photo Locations

Camp Ravenna
Portage and Trumbull
Counties, Ohio

Figure A5 - 5



Photograph Location and Direction Fence Line	Former Railroad Roads Area of Concern Former Building/Structure Excavation Area	 	 Document Name: WPBG_PhotoLoc.mxd Drawn By: H5TDEEMP Date Saved: 31 Oct 2016 Time Saved: 9:21:12 AM	<p align="center">Winklepeck Burning Grounds Photo Locations</p> <p align="center">Camp Ravenna Portage and Trumbull Counties, Ohio</p>	<p align="center">Figure A5 - 6</p>
---	---	------	---	--	-------------------------------------

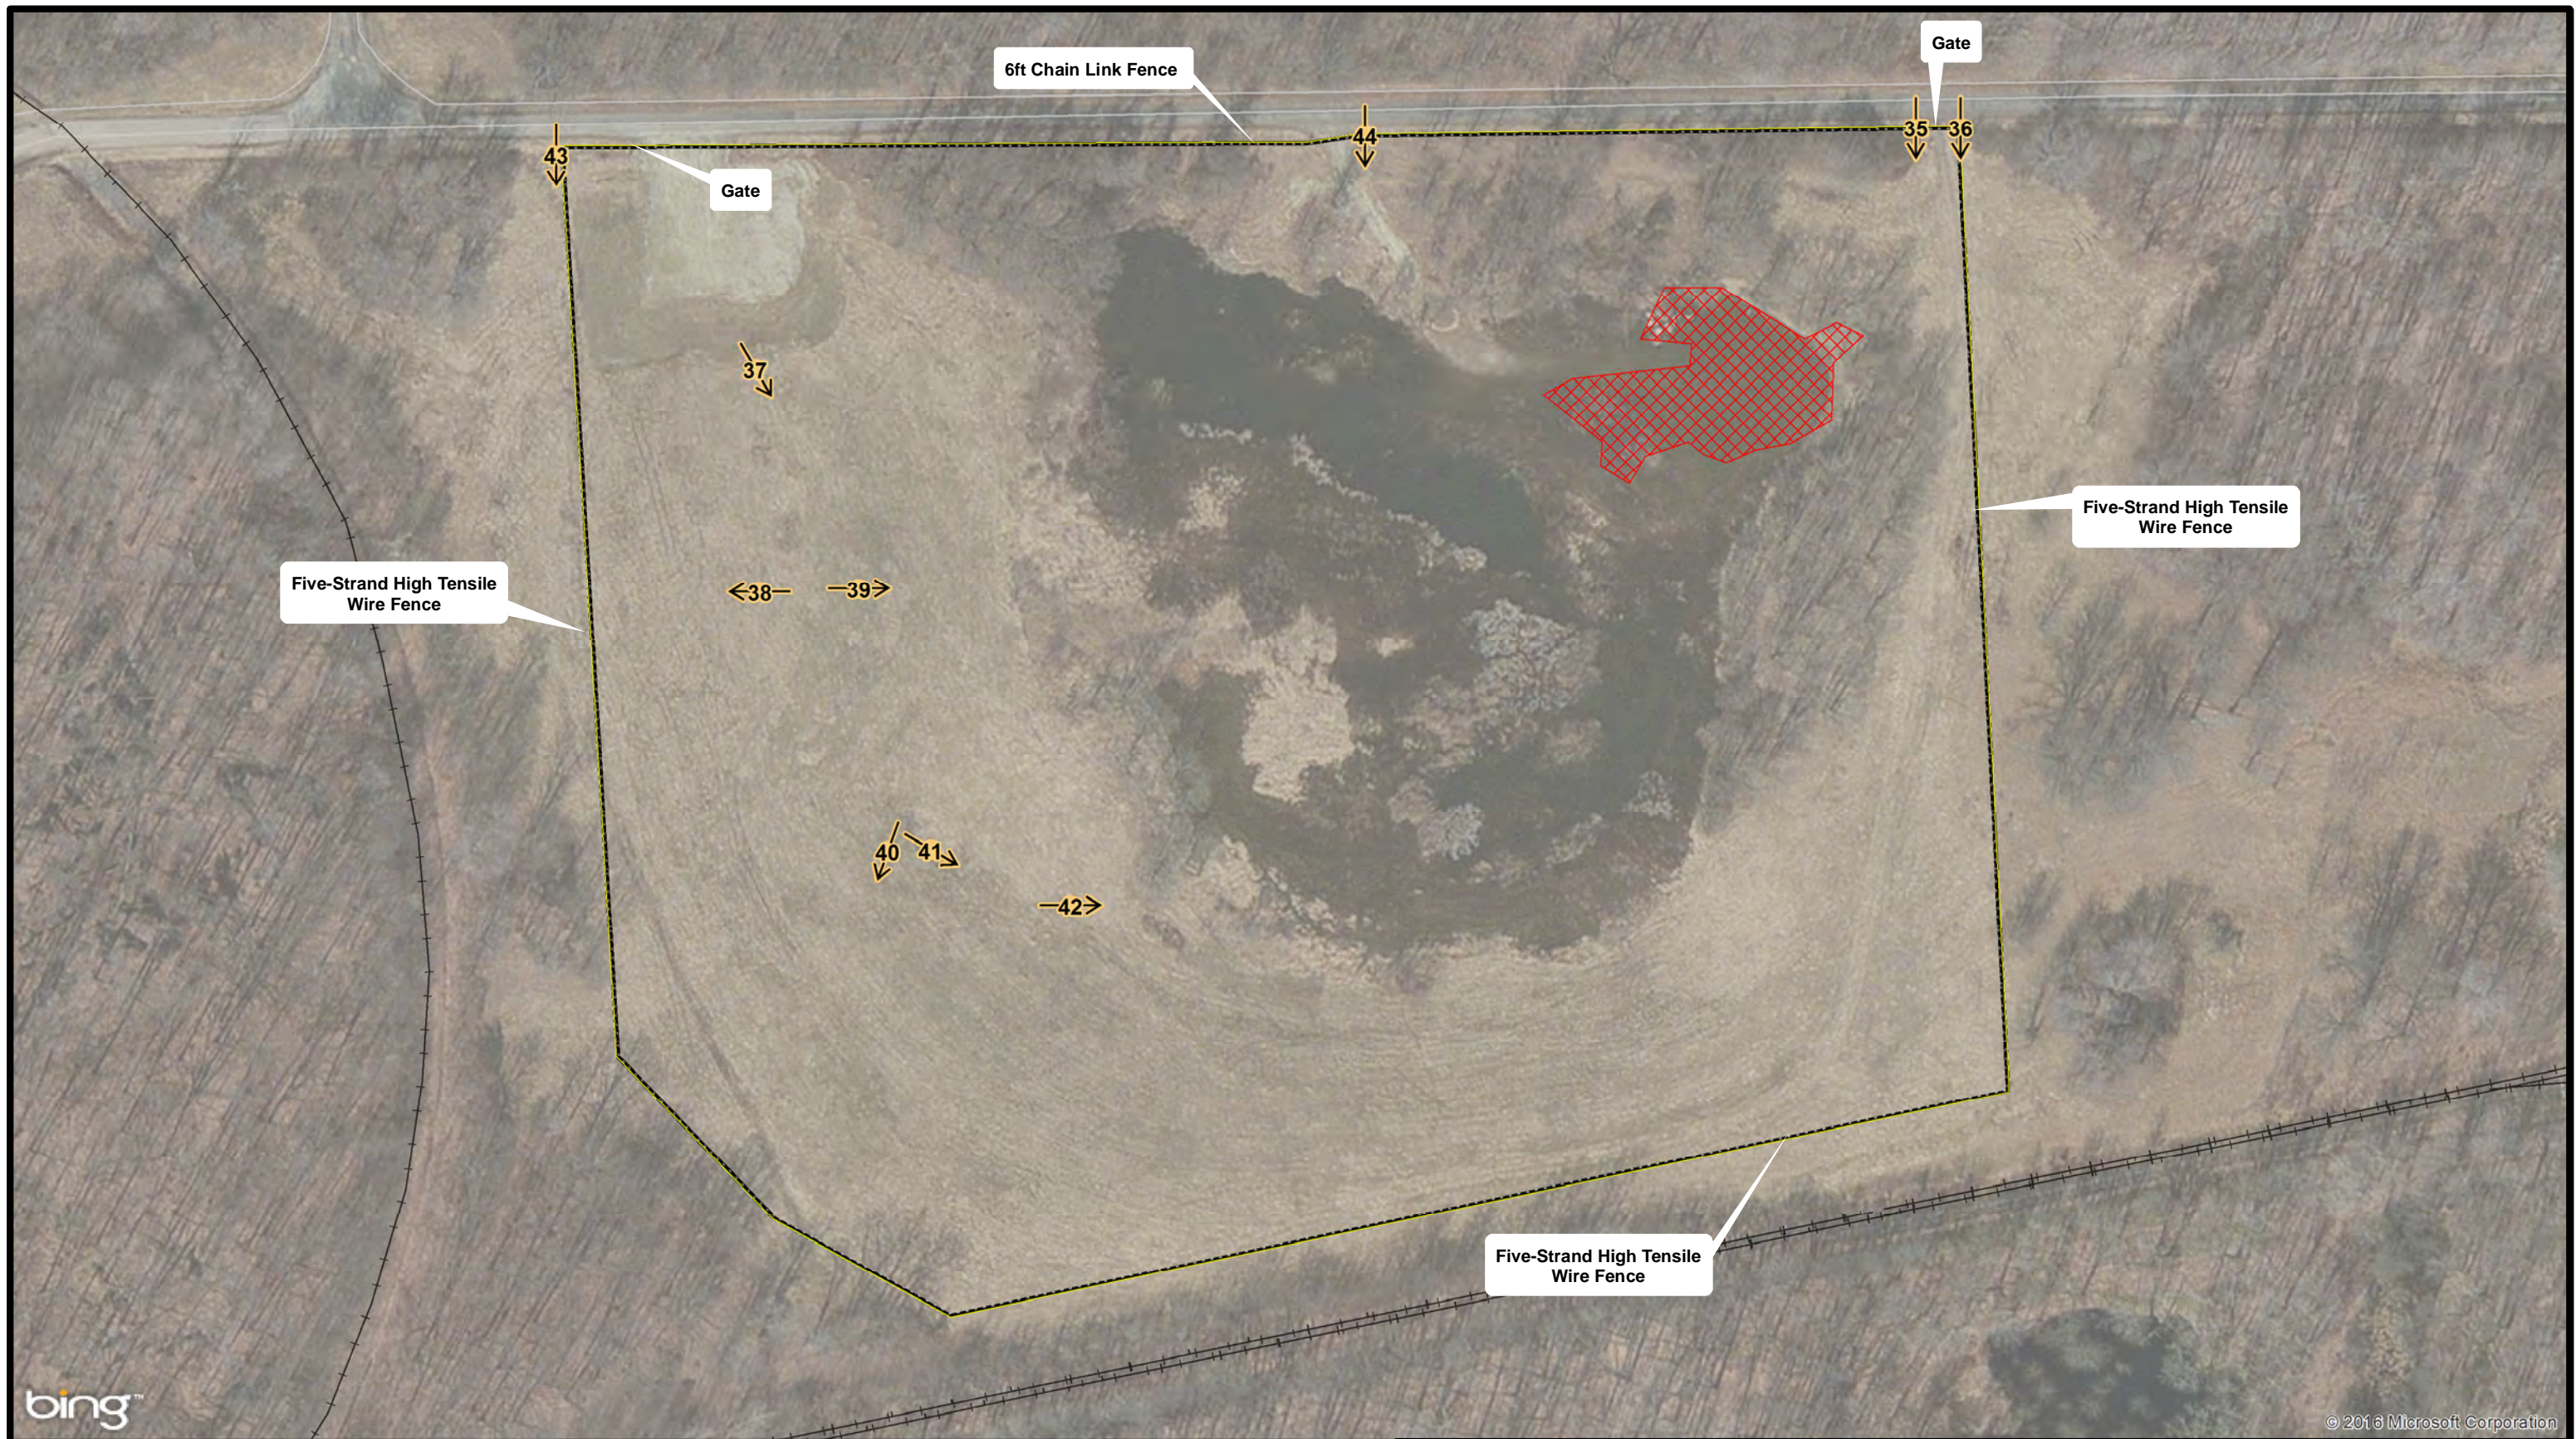

<p> Photograph Location and Direction</p> <p> Fence Line</p>	<p> Railroads</p> <p> Roads</p> <p> Excavation Area</p>	<p></p> <p>0 125 250 Feet</p>	<p> US Army Corps of Engineers Buffalo District</p> <p>Document Name: RQL_PhotoLoc.mxd Drawn By: H5TDEEMP Date Saved: 31 Oct 2016 Time Saved: 9:28:33 AM</p>	<p>Ramsdell Quarry Landfill Photo Locations</p> <p>Camp Ravenna Portage and Trumbull Counties, Ohio</p>	<p>Figure A5 - 7</p>
--	---	-------------------------------	--	---	----------------------

PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 1 (RVAAP-08)

Photo No. 1
(August 10, 2016)

Description:

Locked entrance
gate and warning
signs




Photo No. 2
(August 10, 2016)

Description:

Remediated area
between former
buildings CB-3
and CB-4A



PHOTOGRAPHIC RECORD Camp Ravenna	
Load Line 1 (RVAAP-08)	
Photo No. 3 (August 10, 2016)	
<u>Description:</u> Remediated areas at former building CB-4	
Photo No. 4 (August 10, 2016)	
<u>Description:</u> Remediated area at former building CB-10	

PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 1 (RVAAP-08)

Photo No. 5
(August 10, 2016)

Description:

Remediated area
at former
building
CB-13-A





Load Line 2 (RVAAP-09)

Photo No. 6
(August 10, 2016)

Description:

Locked entrance
gate and warning
signs



PHOTOGRAPHIC RECORD Camp Ravenna	
Load Line 2 (RVAAP-09)	
Photo No. 7 (August 10, 2016)	
<u>Description:</u> Remediated area at former building DB-3	
Photo No. 8 (August 10, 2016)	
<u>Description:</u> Remediated area at former buildings DB-13, DB-13A, and DB-13B	

PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 2 (RVAAP-09)

Photo No. 9
(August 10, 2016)

Description:

Remediated area
at former
building DB-27



Load Line 3 (RVAAP-03)

Photo No. 10
(August 10, 2016)

Description:

Locked entrance
gate and warning
signs



PHOTOGRAPHIC RECORD Camp Ravenna	
Load Line 3 (RVAAP-03)	
Photo No. 11 (August 10, 2016)	
<u>Description:</u> Remediated area at former building EB-22	
Photo No. 12 (August 10, 2016)	
<u>Description:</u> Damaged fence	

PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 3 (RVAAP-03)

Photo No. 13
(August 10, 2016)

Description:

Remediated area
at former
building EB-8A





Photo No. 14
(August 10, 2016)

Description:

Remediated area
at former
building EB
10/10A



PHOTOGRAPHIC RECORD Camp Ravenna	
Load Line 3 (RVAAP-03)	
Photo No. 15 (August 10, 2016)	
<u>Description:</u> Remediated area at former building EB-4	
Photo No. 16 (August 10, 2016)	
<u>Description:</u> Remediated area at northern section of the site	

PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 4 (RVAAP-11)

Photo No. 17
(August 10, 2016)

Description:

Locked entrance
gate and warning
sign





Photo No. 18
(August 10, 2016)

Description:

Remediated area
at former
building G-1A



PHOTOGRAPHIC RECORD Camp Ravenna	
Load Line 4 (RVAAP-11)	
Photo No. 19 (August 10, 2016)	
<u>Description:</u> Remediated area at former building G-4	
Photo No. 20 (August 10, 2016)	
<u>Description:</u> Remediated area at former rail line	

PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 4 (RVAAP-11)

Photo No. 21
(August 10, 2016)

Description:

Remediated area
at former
building G-12



Load Line 12 (RVAAP-12)

Photo No. 22
(August 10, 2016)

Description:

Locked entrance
gate and warning
signs



PHOTOGRAPHIC RECORD
Camp Ravenna

Load Line 12 (RVAAP-12)

Photo No. 23
(August 10, 2016)

Description:

Remediated area
at drainage ditch



Photo No. 24
(August 10, 2016)

Description:

Remediated area
at drainage ditch



PHOTOGRAPHIC RECORD Camp Ravenna	
Winklepeck Burning Grounds (RVAAP-05)	
Photo No. 25 (August 10, 2016)	
<u>Description:</u> Former burn pad 58 where MEC clearing was performed	
Photo No. 26 (August 10, 2016)	
<u>Description:</u> Monitoring well	

PHOTOGRAPHIC RECORD
Camp Ravenna

Winklepeck Burning Grounds (RVAAP-05)

Photo No. 27
(August 10, 2016)

Description:

Former burn pad
66 where soil
remediation will
be performed



Photo No. 28
(August 10, 2016)

Description:

Former burn pad
67 where soil
remediation will
be performed



PHOTOGRAPHIC RECORD
Camp Ravenna

Winklepeck Burning Grounds (RVAAP-05)

Photo No. 29
(August 10, 2016)

Description:

Former burn pad
70 where MEC
clearing was
performed



Photo No. 30
(August 10, 2016)

Description:

Former burn pad
38 where soil
remediation will
be performed



PHOTOGRAPHIC RECORD
Camp Ravenna

Winklepeck Burning Grounds (RVAAP-05)

Photo No. 31
(August 10, 2016)

Description:

Former burn pad
37 where MEC
clearing was
performed



Photo No. 32
(August 10, 2016)

Description:

Former burn pad
45 where MEC
clearing was
performed.
Monitoring well
in background.



PHOTOGRAPHIC RECORD
Camp Ravenna

Ramsdell Quarry Landfill (RVAAP-01)

Photo No. 33
(August 10, 2016)

Description:

Locked entrance
gate and warning
signs at the
northeast corner
of the landfill



Photo No. 34
(August 10, 2016)

Description:

Warning sign on
landfill fence



PHOTOGRAPHIC RECORD
Camp Ravenna

Ramsdell Quarry Landfill (RVAAP-01)

Photo No. 35
(August 10, 2016)

Description:

Warning sign on
perimeter fence



Photo No. 36
(August 10, 2016)

Description:

Fencing at
northeast corner
of landfill.



PHOTOGRAPHIC RECORD
Camp Ravenna

Ramsdell Quarry Landfill (RVAAP-01)

Photo No. 37
(August 10, 2016)

Description:

West side of
landfill







Photo No. 38
(August 10, 2016)



Description:

Monitoring well
RQLmw-15 and
perimeter fence
at west side of
landfill



PHOTOGRAPHIC RECORD Camp Ravenna	
Ramsdell Quarry Landfill (RVAAP-01)	
Photo No. 39 (August 10, 2016)	
<u>Description:</u> Site interior showing low area (wetland)	
Photo No. 40 (August 10, 2016)	
<u>Description:</u> Southwest section of landfill	

PHOTOGRAPHIC RECORD Camp Ravenna	
Ramsdell Quarry Landfill (RVAAP-01)	
Photo No. 41 (August 10, 2016)	
<u>Description:</u> Southwest section of landfill	
Photo No. 42 (August 10, 2016)	
<u>Description:</u> Site interior	

PHOTOGRAPHIC RECORD Camp Ravenna	
Ramsdell Quarry Landfill (RVAAP-01)	
Photo No. 43 (August 10, 2016)	
<u>Description:</u> Perimeter fence on west side of landfill	
Photo No. 44 (August 10, 2016)	
<u>Description:</u> Wetland at interior of site	

ATTACHMENT 6
Interview Records

INTERVIEW DOCUMENTATION FORM

Camp Ravenna

The following is a list of individuals interviewed for this five-year review. See the attached interview records for a detailed summary of the interviews.

<u>Mark Leeper, P.G., MBA</u>	<u>Environmental Cleanup</u> <u>Program Manager</u>	<u>ARNG</u>	<u>Nov. 7, 2016</u>
Name	Title/Position	Organization	Date
<u>Kevin Sedlak</u>	<u>Restoration Program</u> <u>Manager</u>	<u>ARNG</u>	<u>Nov. 4, 2016</u>
Name	Title/Position	Organization	Date
<u>Katie Tait</u>	<u>Environmental Specialist</u>	<u>Camp Ravenna</u> <u>(OHARNG)</u>	<u>Nov. 9, 2016</u>
Name	Title/Position	Organization	Date
<u>Gregory Moore</u>	<u>Project Manager</u>	<u>USACE Louisville</u> <u>District</u>	<u>Oct. 19, 2016</u>
Name	Title/Position	Organization	Date
<u>Nathaniel Peters</u>	<u>Environmental Engineer</u>	<u>USACE Louisville</u> <u>District</u>	<u>Nov. 15, 2016</u>
Name	Title/Position	Organization	Date
<u>Angela Schmidt</u>	<u>Risk Assessor</u>	<u>USACE Louisville</u> <u>District</u>	<u>Nov. 7, 2016</u>
Name	Title/Position	Organization	Date
<u>Allan Brillinger</u>	<u>Program Manager</u>	<u>Vista Sciences</u> <u>Corporation</u>	<u>Nov. 7, 2016</u>
Name	Title/Position	Organization	Date
<u>Various</u>	<u>NEDO DERR</u>	<u>Ohio EPA</u>	<u>Nov. 23, 2016</u>
Name	Title/Position	Organization	Date
<u>Tom Tadsen</u>	<u>Restoration Advisory</u> <u>Board (RAB) Co-Chair</u>	<u>RVAAP RAB</u>	<u>Nov. 5, 2016</u>
Name	Title/Position	Organization	Date

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time:	Date: <i>Nov. 7, 2016</i>
Type: <input type="checkbox"/> Telephone <input type="checkbox"/> Visit <input checked="" type="checkbox"/> Other (email)		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>Not applicable</i>			
Contact Made By			
Name: <i>James R Stachowski, PE</i>		Title: <i>Environmental Engineer</i>	
		Organization: <i>US Army Corps of Engineers, Buffalo District</i>	
Individual Contacted			
Name: <i>Mark Leeper, P.G., MBA</i>		Title: <i>Environmental Cleanup Program Manager</i>	
		Organization: <i>Army National Guard</i>	
Telephone No: <i>(703) 607-7955</i>		Street Address: <i>111 South George Mason Drive</i>	
Fax No:		City, State, Zip: <i>Arlington, VA 22204</i>	
E-Mail Address: <i>mark.s.leeper.civ@mail.mil</i>			
Summary Of Conversation			
General			
1. What is your role and responsibility with these projects? <u><i>I am the acting Restoration Branch Chief with program manager duties that include Camp Ravenna. I serve as the budgetary POC for Camp Ravenna and also participate in Ohio EPA, contractor and Army only meetings. I work with the Louisville COE regarding contracts and budget for Camp Ravenna.</i></u>			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -11)			
2. What is your overall impression of the project (general sentiment)? <u><i>The load lines sites are moving well through the system.</i></u>			
3. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results <u><i>I travel to Camp Ravenna approximately four times/year to complete site walks and attend meetings. I am in communication with Kevin Sedlak and Katie Tait at least three times per week.</i></u>			
4. Have there been any complaints, violations, or other incidents related to the site requiring a response by your office? If so, please give details of the events and results of the responses. <u><i>No</i></u>			
5. Do you feel well informed about the site's activities and progress? <u><i>Absolutely</i></u>			
6. Is the remedy functioning as intended? <u><i>Yes</i></u>			
7. Has any other information come to light that could call into question the protectiveness of the remedy? <u><i>No</i></u>			
8. Do you have any comments, suggestions, or recommendations regarding the site's management or operation? <u><i>No</i></u>			

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	Date: <i>Nov. 7, 2016</i>

Load Line 12 (RVAAP-12)

9. What is your overall impression of the project (general sentiment)?
The project is moving nicely. We submitted a Revised Phase II Remedial Investigation Report for Wet Sediment and Surface Water at RVAAP-12 Load Line 12 and have received Ohio EPA comments. We are pushing for no further action.
10. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results
Yes, we have been in communication on a weekly basis to discuss the path forward and responses to comments.
11. Have there been any complaints, violations, or other incidents related to the site requiring a response by your office? If so, please give details of the events and results of the responses.
No
12. Do you feel well informed about the site's activities and progress?
Yes
13. Is the remedy functioning as intended?
Not applicable
14. Has any other information come to light that could call into question the protectiveness of the remedy?
Not to my knowledge
15. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

Ramsdell Quarry Landfill (RVAAP-01)

16. What is your overall impression of the project (general sentiment)?
Land use controls are in place and the site is included the five-year review process. It appears the system is working well.
17. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results
Yes, there has been routine communication regarding the site.
18. Have there been any complaints, violations, or other incidents related to the site requiring a response by your office? If so, please give details of the events and results of the responses.
No
19. Do you feel well informed about the site's activities and progress?
Yes
20. Is the remedy functioning as intended?
Yes, the site is fenced-in, which restricts access.
21. Has any other information come to light that could call into question the protectiveness of the remedy?
There was liquid noticed at the ROL cap, it was not clear if it was leachate or runoff. No notice of violation is typically associated with this issue.
22. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	Date: <i>Nov. 7, 2016</i>

Winklepeck Burning Grounds (RVAAP-05)

23. What is your overall impression of the project (general sentiment)?
We are reopening the site for additional remediation so digging restrictions will be pulled and LUCs for the perimeter fence will not be required.

24. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results
Yes, there has been routine communication regarding the site activities. Ohio EPA has approved the Final Remedial Design for the ROD amendment.

25. Have there been any complaints, violations, or other incidents related to the site requiring a response by your office? If so, please give details of the events and results of the responses.
No

26. Do you feel well informed about the site's activities and progress?
Yes

27. Is the remedy functioning as intended?
Yes

28. Has any other information come to light that could call into question the protectiveness of the remedy?
No

29. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time: <i>14:00</i>	Date: <i>Nov. 4, 2016</i>
Type: <input checked="" type="checkbox"/> Telephone <input type="checkbox"/> Visit <input type="checkbox"/> Other		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>Not applicable</i>			
Contact Made By			
Name: <i>James R Stachowski, PE</i>		Title: <i>Environmental Engineer</i>	
Organization: <i>US Army Corps of Engineers, Buffalo District</i>			
Individual Contacted			
Name: <i>Kevin Sedlak</i>		Title: <i>Camp Ravenna Restoration Project Manager</i>	
Organization: <i>Army National Guard</i>			
Telephone No: <i>(614) 336-6000 (x 2053)</i>		Street Address: <i>1438 State Route 534 SW</i>	
Fax No:		City, State, Zip: <i>Newton Falls, OH 44444</i>	
E-Mail Address: <i>kevin.m.sedlak.ctr@mail.mil</i>			
Summary Of Conversation			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -11)			
1. What is your involvement with the project? <u><i>I oversee the project, review contractor documents, and provide comments and clarification, where necessary. I also work with Ohio EPA, provide requested information, and attend all meetings with Ohio EPA, USACE, and contractors.</i></u>			
2. Have any problems been encountered that required or will require changes to the remedial design or Record of Decision (ROD)? <u><i>The sites couldn't be used for military training after the Interim ROD removal action.</i></u>			
3. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <u><i>None</i></u>			
4. What is the status of additional characterization sampling and the feasibility study (FS) addendum for these sites? <u><i>The FS addendum is being prepared.</i></u>			
5. What is the intended future use of the sites? <u><i>Military training (maneuver range)</i></u>			
6. Has environmental data been evaluated to determine if additional sampling and/or remediation is needed at Load Line 3 to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above the cleanup levels identified in the Interim ROD? (First Five-Year Review report recommendation #2) <u><i>Check with our contractor (Leidos) on the status of these results.</i></u>			
7. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date? <u><i>No, although the grass is cut annually to prevent tree growth and snow is occasionally plowed to provide access.</i></u>			
8. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy? <u><i>None required.</i></u>			

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>14:00</i>
		Date:	<i>Nov. 4, 2016</i>

9. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
Not applicable
10. Is the remedy functioning as intended?
Yes, it functioned as originally intended. However, the remedy is no longer compatible with the intended use of the property because of restrictions placed on their use. The sites haven't been used since the Interim ROD remedy was implemented
11. Has any other information come to light that could call into question the protectiveness of the remedy?
None
12. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

Load Line 12 (RVAAP-12)

13. What is your involvement with the project?
I oversee the project, review contractor documents, and provide comments and clarification, where necessary. I also work with Ohio EPA, provide requested information, and attend all meetings with Ohio EPA, USACE, and contractors.
14. Have any problems been encountered that required or will require changes to the remedial design or ROD?
The sites couldn't be used for intended military training after the ROD removal action. Note, this site was used for ammonium nitrate production (as opposed to munitions load, assemble, and package operations).
15. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
None
16. What is the intended future use of the site?
Military training (maneuver range)
17. What is the status of additional characterization sampling and the FS addendum for this site?
The FS addendum is being prepared.
18. Has the Property Management Plan (PMP) been updated to include the land use control requirements identified in the ROD and remedial design?
Not yet
19. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
No, although the grass is cut annually to prevent tree growth and snow is occasionally plowed to provide access.
20. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
None are required.
21. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
Not applicable
22. Is the remedy functioning as intended?
Yes, it functioned as originally intended. However, the remedy is no longer compatible with the intended use of the property because of restrictions placed on their use. The site hasn't been used since the ROD remedy was implemented

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>14:00</i>
		Date:	<i>Nov. 4, 2016</i>

23. Has any other information come to light that could call into question the protectiveness of the remedy?

None

24. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

None

Ramsdell Quarry Landfill (RVAAP-01)

25. What is your involvement with the project?

I oversee the project, review contractor documents, and provide comments and clarification, where necessary. I also work with Ohio EPA, provide requested information, and attend all meetings with Ohio EPA, USACE, and contractors.

26. Have any problems been encountered that required or will require changes to the remedial design or ROD? *An Engineering Evaluation/Cost Analysis and ROD Amendment were prepared because friable asbestos was encountered during the ROD removal action. The revised remedial action (restricted access) has been implemented.*

27. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?

None

28. Has the PMP been updated to include the land use control requirements identified in the ROD, ROD amendment, and remedial designs?

Land use requirements will be incorporated into a new version of the PMP (not released yet).

29. What is the intended future use of the site?

Restricted access.

30. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?

None

31. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.

None

32. Is the remedy functioning as intended?

Yes

33. Has any other information come to light that could call into question the protectiveness of the remedy?

None

34. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

None

Winklepeck Burning Grounds (RVAAP-05)

35. What is your involvement with the project?

I oversee the project, review contractor documents, and provide comments and clarification, where necessary. I also work with Ohio EPA, provide requested information, and attend all meetings with Ohio EPA, USACE, and contractors.

36. Have any problems been encountered that required or will require changes to the remedial design or ROD? *Additional sampling was performed and an Explanation of Significant Differences was prepared to enable use of the site as a multi-purpose machine gun range.*

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>14:00</i>	Date: <i>Nov. 4, 2016</i>

<p>37.</p> <p>38.</p> <p>39.</p> <p>40.</p> <p>41.</p> <p>42.</p> <p>43.</p> <p>44.</p>	<p>Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <u>None</u></p> <p>What is the status of the remedial action for post-ROD changes? <u>The removal actions are ongoing and expected to be complete by the end of November, 2016.</u></p> <p>What is the intended future use of the site? <u>Multi-purpose machine gun range.</u></p> <p>Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy? <u>None</u></p> <p>Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details. <u>Not applicable</u></p> <p>Is the remedy functioning as intended? <u>Yes, it functioned as originally intended. However, training requirements have changed and the remedy is no longer compatible with the intended use of the property.</u></p> <p>Has any other information come to light that could call into question the protectiveness of the remedy? <u>None</u></p> <p>Do you have any comments, suggestions, or recommendations regarding the site's management or operation? <u>None</u></p>
---	--

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time: <i>15:00</i>	Date: <i>Nov. 9, 2016</i>
Type: <input checked="" type="checkbox"/> Telephone <input type="checkbox"/> Visit <input type="checkbox"/> Other		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>Not applicable</i>			
Contact Made By			
Name: <i>James R Stachowski, PE</i>		Title: <i>Environmental Engineer</i>	
		Organization: <i>US Army Corps of Engineers, Buffalo District</i>	
Individual Contacted			
Name: <i>Katie Tait</i>		Title: <i>Environmental Specialist 2</i>	
		Organization: <i>Ohio Army National Guard</i>	
Telephone No: <i>(614) 336-6136</i>		Street Address: <i>1438 State Route 534 SW</i>	
Fax No:		City, State, Zip: <i>Newton Falls, OH 44444</i>	
E-Mail Address: <i>Kathryn.s.tait.nfg@mail.mil</i>			
Summary Of Conversation			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -11)			
1. What is your involvement with the project? <u><i>I am the Camp Ravenna Restoration Program Manager for OHARNG. I represent OHARNG and their interests for the RVAAP restoration program. I also serve as a liaison for the OHARNG with Ohio EPA.</i></u>			
2. Have any problems been encountered that required or will require changes to the remedial design or Record of Decision (ROD)? <u><i>None</i></u>			
3. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <u><i>None, the project is moving forward as intended.</i></u>			
4. What is the status of additional characterization sampling and a feasibility study (FS) addendum for these sites? <u><i>The FS addendum is being prepared. Additional sampling wasn't done at LL-1, -3, and -4 because adequate data was available for soil and dry sediment at these sites. Additional sediment samples were collected at LL-2. The plan is to clean up the sites to a commercial/industrial standard.</i></u>			
5. What is the intended future use of the sites? <u><i>Heavy maneuver area (tank obstacle course).</i></u>			
6. Has environmental data been evaluated to determine if additional sampling and/or remediation is needed at Load Line 3 to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above the cleanup levels identified in the Interim ROD? (First Five-Year Review report recommendation #2) <u><i>Additional sampling has not been done at this site. The FS addendum should evaluate this data.</i></u>			
7. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date? <u><i>The sites are maintained for restricted access and the gates are kept locked. An annual training memo identifies these areas as "restricted access". Occasional grass mowing and natural resources management activities are performed.</i></u>			

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>15:00</i>	Date: <i>Nov. 9, 2016</i>

8. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Not applicable

9. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
Not applicable

10. Is the remedy functioning as intended?
Yes, exposures are not occurring because access to the sites is restricted.

11. Has any other information come to light that could call into question the protectiveness of the remedy?
None

12. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

Load Line 12 (RVAAP-12)

13. What is your involvement with the project?
I am the Camp Ravenna Restoration Program Manager for OHARNG. I represent OHARNG and their interests for the RVAAP restoration program. I also serve as a liaison for the OHARNG with Ohio EPA.

14. Have any problems been encountered that required or will require changes to the remedial design or ROD?
None

15. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
None, the project is moving forward as intended.

16. What is the intended future use of the site?
Heavy maneuver area (tank obstacle course).

17. What is the status of additional characterization sampling and a FS addendum for the site?
The FS addendum is being prepared. Additional sampling wasn't done because adequate data was available for soil and dry sediment at these sites. The plan is to clean up the sites to a commercial/industrial standard.

18. Has the Property Management Plan (PMP) been updated to include the land use control requirements identified in the ROD and remedial design?
No, it will be included in a future edition of the PMP.

19. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
The site is maintained for restricted access and the gate is kept locked. An annual training memo identifies these areas as "restricted access". Occasional grass mowing and natural resources management activities are performed.

20. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Not applicable

21. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
Not applicable

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>15:00</i>	Date: <i>Nov. 9, 2016</i>

22. Is the remedy functioning as intended?
Yes, exposures are not occurring because access to the sites is restricted.

23. Has any other information come to light that could call into question the protectiveness of the remedy?
None

24. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

Ramsdell Quarry Landfill (RVAAP-01)

25. What is your involvement with the project?
I am the Camp Ravenna Restoration Program Manager for OHARNG. I represent OHARNG and their interests for the RVAAP restoration program. I also serve as a liaison for the OHARNG with Ohio EPA and administer LUC awareness contractor briefs for the site.

26. Have any problems been encountered that required or will require changes to the remedial design or ROD?
None since the ROD addendum

27. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
None

28. Has the PMP been updated to include the land use control (LUC) requirements identified in the ROD, ROD amendment, and remedial designs?
A paper copy of the PMP at Camp Ravenna has been updated to include these LUC requirements.

29. What is the intended future use of the site?
Restricted access

30. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
None

31. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
None

32. Are the remedies functioning as intended?
Yes

33. Has any other information come to light that could call into question the protectiveness of the remedy?
No

34. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

Winklepeck Burning Grounds (RVAAP-05)

35. What is your involvement with the project?
I am the Camp Ravenna Restoration Program Manager for OHARNG. I represent OHARNG and their interests for the RVAAP restoration program. I also serve as a liaison for the OHARNG with Ohio EPA and administer LUC awareness contractor briefs for the site.

36. Have any problems been encountered that required or will require changes to the remedial design or ROD?
An Explanation of Significant Differences (ESD) was prepared.

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>15:00</i>	Date: <i>Nov. 9, 2016</i>

37.	Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <u><i>None</i></u>
38.	What is the status of the remedial action for post-ROD changes? <u><i>The ESD remedy is being implemented (Nov. 2016).</i></u>
39.	What is the intended future use of the site? <u><i>Machine gun range</i></u>
40.	Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy? <u><i>None</i></u>
41.	Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details. <u><i>The time and cost required to inspect the Camp Ravenna perimeter fence was significant. Ohio EPA agreed that this is no longer required.</i></u>
42.	Is the remedy functioning as intended? <u><i>Yes</i></u>
43.	Has any other information come to light that could call into question the protectiveness of the remedy? <u><i>None</i></u>
44.	Do you have any comments, suggestions, or recommendations regarding the site's management or operation? <u><i>None</i></u>

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time: <i>1045 - 1125</i>	Date: <i>Oct 19, 2016</i>
Type: <input type="checkbox"/> Telephone <input checked="" type="checkbox"/> Visit <input checked="" type="checkbox"/> Other (completed via email)		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>US Army Corps of Engineers, Louisville District Office (CELRL)</i>			
Contact Made By			
Name: <i>Karen Keil</i>		Title: <i>Environmental Toxicologist</i>	Organization: <i>US Army Corps of Engineers, Buffalo District</i>
Individual Contacted			
Name: <i>Gregory Moore</i>		Title: <i>Project Manager</i>	Organization: <i>CELRL</i>
Telephone No: <i>(502) 315-6902</i>		Street Address: <i>600 Dr. Martin Luther King Pl.</i>	
Fax No:		City, State, Zip: <i>Louisville, KY 40402</i>	
E-Mail Address: <i>Gregory.F.Moore@usace.army.mil</i>			
Summary Of Conversation			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -10)			
1. What is your involvement with the project? <u><i>I have been the USACE Project Manager for a little over 2 years.</i></u>			
2. Have any problems been encountered that required or will require changes to the remedial design or Record of Decision (ROD)? <u><i>LUCs, as interpreted by Ohio EPA, would be too restrictive for the Army during training (e.g., fence maintenance and monitoring requirements). LL 12 is currently undergoing a "soil optimization study" to eliminate the need for full cleaning of military vehicles (wheels) when traversing the load lines during training. A preliminary draft FS addendum is currently under Army review; you may get a copy from Angela Schmidt. The objective is to meet industrial land use clean up goals.</i></u>			
3. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <u><i>See above, remove restrictions on the end user.</i></u>			
4. What is the status of additional characterization sampling and the FS addendum for these sites? <u><i>PBA-2013 (performance based acquisition contract) to look at LL 1 -4 and surface water (site-wide) is currently on-going.</i></u>			
5. What is the intended future use of the sites? <u><i>Military training</i></u>			
6. Has environmental data been evaluated to determine if additional sampling and/or remediation is needed at Load Line 3 to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above the cleanup levels identified in the Interim ROD? (First Five-Year Review report recommendation #2) <u><i>I don't know, ask Nate Peters or Angela Schmidt.</i></u>			

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>1045 - 1125</i>	Date: <i>Oct 19, 2016</i>

7. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
I'm not sure if inspections are performed. Check with Camp Ravenna staff and/or Vista Sciences Corp. (Environmental support contractor).
8. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Yes, see above. We're looking at changing the remedies, especially the interim remedies at the load lines.
9. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
The sites have not been used and there are no ongoing monitoring and maintenance activities associated with the Interim ROD remedy.
10. Is the remedy functioning as intended?
Maybe
11. Has any other information come to light that could call into question the protectiveness of the remedy?
No new data or evidence of soil impact on surface water has been obtained. There are explosives in groundwater south of the LL's that appear to be leaving the installation, but we don't know what the source is yet. This is being investigated under facility-wide groundwater (RVAAP 66).
12. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No, I am awaiting the next round of sampling results.

Load Line 12 (RVAAP-12)

13. What is your involvement with the project?
I have been the USACE Project Manager for a little over 2 years.
14. Have any problems been encountered that required or will require changes to the remedial design or ROD?
LUCs, as interpreted by Ohio EPA, would be too restrictive for the Army during training (e.g., fence maintenance and monitoring requirements). LL 12 is currently undergoing a "soil optimization study" to eliminate the need for full cleaning of military vehicles (wheels) when traversing the load lines during training. A preliminary draft FS addendum is currently under Army review; you may get a copy from Angela Schmidt. The objective is to meet industrial land use clean up goals.
15. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
See above, remove restrictions on the end user.
16. What is the intended future use of the site?
Military training.
17. What is the status of additional characterization sampling and the FS addendum for this site?
PBA-2013 (performance based acquisition contract) to look at LL 12 and surface water (site-wide) is currently on-going.
18. Has the Property Management Plan (PMP) been updated to include the land use control requirements identified in the ROD and remedial design?
We have this planned in [fiscal year] FY 17.
19. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
I'm not sure if inspections are performed. Check with Camp Ravenna staff and/or Vista Sciences Corp. (Environmental support contractor).

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>1045 - 1125</i>	Date: <i>Oct 19, 2016</i>

20. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Yes, see above. We're looking at changing the remedies, especially the interim remedies at the load lines.

21. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
The site has not been used and there are no ongoing monitoring and maintenance activities associated with the ROD remedy.

22. Is the remedy functioning as intended?
Maybe

23. Has any other information come to light that could call into question the protectiveness of the remedy?
No new data or evidence of soil impact on surface water. For example, there are explosives in groundwater south of the LL's that appear to be leaving the installation, but we don't know what the source is yet. This is investigated under facility wide groundwater (RVAAP 66).

24. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No, I am awaiting the next round of sampling.

Ramsdell Quarry Landfill (RVAAP-01)

25. What is your involvement with the project?
I have been the USACE Project Manager for a little over 2 years.

26. Have any problems been encountered that required or will require changes to the remedial design or ROD?
Nothing is going on except groundwater and surface water monitoring. Results indicate that conditions are fairly stable.

27. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
No

28. Has the PMP been updated to include the land use control requirements identified in the ROD, ROD amendment, and remedial designs?
Planned in FY 17.

29. What is the intended future use of the site?
As a landfill.

30. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
No

31. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
No

32. Is the remedy functioning as intended?
Yes, quarterly inspections of the fence and landfill are performed. The wetlands are avoided.

33. Has any other information come to light that could call into question the protectiveness of the remedy?
No

34. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>1045 - 1125</i>
		Date:	<i>Oct 19, 2016</i>

Winklepeck Burning Grounds (RVAAP-05)

35. What is your involvement with the project?
I have been the USACE Project Manager for a little over 2 years.
36. Have any problems been encountered that required or will require changes to the remedial design or ROD?
An Explanation of Significant Differences (ESD) and remedial design were completed. Additional soil removal will take place next month.
37. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
Currently under construction
38. What is the status of the remedial action for post-ROD changes?
A contract (with TetraTech) for soil removal is currently on-going.
39. What is the intended future use of the site?
Machine Gun Range/Military Training.
40. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Currently under construction
41. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
Difficulties in maintaining the LUCs (perimeter fence repairs).
42. Is the remedy functioning as intended?
Currently under construction
43. Has any other information come to light that could call into question the protectiveness of the remedy?
The ESD is resolving issues that will make the site more protective.
44. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time:	Date: <i>Nov. 15, 2016</i>
Type: <input type="checkbox"/> Telephone <input checked="" type="checkbox"/> Visit <input checked="" type="checkbox"/> Other (completed via email)		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>US Army Corps of Engineers, Louisville District Office</i>			
Contact Made By			
Name: <i>Karen Keil</i>	Title: <i>Environmental Toxicologist</i>	Organization: <i>US Army Corps of Engineers, Buffalo District</i>	
Individual Contacted			
Name: <i>Nathaniel Peters</i>	Title: <i>Environmental Engineer</i>	Organization: <i>CELRL</i>	
Telephone No: <i>502-315-2624</i>		Street Address: <i>600 Dr. Martin Luther King Pl.</i>	
Fax No:		City, State, Zip: <i>Louisville, KY 40402</i>	
E-Mail Address: Nathaniel.Peters.II@usace.army.mil			
Summary Of Conversation			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -10)			
1. What is your involvement with the project? <u><i>I am the contracting officer's representative (COR) for a contract to develop a Feasibility Study Amendment (FSA) for LL1 – 4 and -12, a senior engineer for the technical team, and a senior engineer reviewer/ technical team lead.</i></u>			
2. Have any problems been encountered that required or will require changes to the remedial design or Record of Decision (ROD)? <u><i>No, soil removal is the decision. We've already cleaned the site to be protective of a National Guard Trainee exposure. The established risk assessment approach was changed by the Army National Guard (ARNG) and Ohio EPA in a 2014 Tech Memo. The Ohio EPA didn't want all 12 exposures, just industrial or residential land use. Ohio EPA equates the exposure to land uses, which was always military training. Ohio EPA wants the USEPA RSL applied for industrial exposure. The OHARNG agreed but Ohio EPA indicates a need to monitor the military training exposure. For example, a guard shack could be built on the site. The FSA will evaluate further cleanup to residential or industrial land uses. It should not be necessary to review all trainees' exposures because the exposure assessment was already comprehensive and conservative. Bottom line is that we may perform more soil removal for residential or industrial land use, but the remedy still remains soil removal unless a treatment option is used for PAHs.</i></u>			
3. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <u><i>I will support the recommendations that will be coming out of the FSA. The building slabs were removed after the 1st interim ROD was signed. Originally, the slabs were intended as a cap for the soil contamination. After slabs were removed, more TNT was found, and additional removals were performed. This FSA covers everything (incorporates all sampling and results) and all previous removal actions.</i></u>			
4. What is the status of additional characterization sampling and the Remedial Investigation/Feasibility (RI/FS) supplement for these sites? <u><i>Sampling and analytical results will be incorporated into the FSA. The pre-draft is currently under USACE review and the draft will be available in early November. The Buffalo District can get a copy at that time.</i></u>			

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	Date: <i>Nov. 15, 2016</i>

5. What is the intended future use of the sites?
Military training, but it will be called commercial/industrial so that full-time workers are protected and all personnel (trainees and civilians) can work there without being monitored.
6. Has environmental data been evaluated to determine if additional sampling and/or remediation is needed at Load Line 3 to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above the cleanup levels identified in the Interim ROD? (First Five-Year Review report recommendation #2)
Yes, it will be included in the FSA.
7. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
No, because it's not used. Instead, it is fenced and closed. As soon as they removed the slabs, a decision was made not to use the sites until a re-evaluation was completed.
8. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
No, because the sites are not currently being used. If they were being used, OHARNG would have to monitor the exposure of the trainees. The Ohio EPA wants hot spot exposure point concentrations determined, so we will look to remove LUCs on large outlying areas.
9. Have there been unexpected monitoring/maintenance difficulties or increased costs at the sites since start-up? If so, please give details.
No because the OHARNG is not using them.
10. Is the remedy functioning as intended?
Yes, it made it protective for National Guard Trainees.
11. Has any other information come to light that could call into question the protectiveness of the remedy?
Although the commercial/industrial USEPA regional risk-based screening levels may not match the military trainee exposure at the site, it should be noted that perhaps the chosen risk-based cleanup levels for the military trainee are over protective because they are identified at the 10^{-5} cancer risk level (as per Ohio EPA preference). The military trainee cleanup goals are all lower than the 10^{-4} level of the EPA regional risk-based cleanup levels for industrial/commercial use (but I will defer to the risk assessor expertise on this question).
12. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

Load Line 12 (RVAAP-12)

13. What is your involvement with the project?
I am the COR for the LLI – 4 and 12 FSA contract, senior engineer for the technical team, and senior engineer reviewer/technical team lead.
14. Have any problems been encountered that required or will require changes to the remedial design or ROD?
I will support the recommendations that will be coming out of the FSA. The building slabs were removed after the 1st interim ROD was signed. The slabs were intended as a cap for the soil contamination. After slabs were removed, more TNT was found, and additional removals were performed. This FSA covers everything (incorporates all sampling and results) and all previous removal actions.
15. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
The Army will need to implement the preferred alternate identified in the FSA for LL – 4 and -12.

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	Date: <i>Nov. 15, 2016</i>

16. What is the intended future use of the site?
Military training, but it will be called commercial/industrial so that full-time workers are protected and all personnel (trainees and civilians) can work there without being monitored.
17. What is the status of additional characterization sampling and the RI/FS supplement for this site?
Sampling and analyses will be incorporated into the FSA. The pre-draft is currently under USACE review and the draft will be available in early November. The Buffalo District can get a copy at that time.
18. Has the Property Management Plan (PMP) been updated to include the land use control requirements identified in the ROD and remedial design?
No, because it's not used. Instead, it is fenced and closed. As soon as they removed the slabs, a decision was made not to use the sites until a re-evaluation was completed.
19. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
Same as above.
20. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
No, because the sites are not currently being used. If they were being used, OHARNG would have to monitor the exposure of the trainees. Now that Ohio EPA wants hot spot exposure point concentrations determined, we will look to remove LUCs on large outlying areas.
21. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
No because the OHARNG is not using them.
22. Is the remedy functioning as intended?
Yes, it made it protective for National Guard Trainees.
23. Has any other information come to light that could call into question the protectiveness of the remedy?
No, see question #11.
24. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

Ramsdell Quarry Landfill (RVAAP-01)

25. What is your involvement with the project?
I am the COR for the LLI – 4 and 12 FSA contract, senior engineer for the technical team, and senior engineer reviewer/technical team lead.
26. Have any problems been encountered that required or will require changes to the remedial design or ROD?
No
27. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
No
28. Has the PMP been updated to include the land use control requirements identified in the ROD, ROD amendment, and remedial designs?
An update to the PMP is in draft form, monitoring and maintenance requirements have been implemented.
29. What is the intended future use of the site?
It is intended to remain as a landfill with no other use planned.

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	Date: <i>Nov. 15, 2016</i>

30. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?

No

31. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.

No

32. Is the remedy functioning as intended?

Yes

33. Has any other information come to light that could call into question the protectiveness of the remedy?

No

34. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

No

Winklepeck Burning Grounds (RVAAP-05)

35. What is your involvement with the project?

I am the COR for the LL1 – 4 and 12 FSA contract, senior engineer for the technical team, and senior engineer reviewer/technical team lead.

36. Have any problems been encountered that required or will require changes to the remedial design or ROD?

An ESD and RD for post-ROD changes have been written and accepted to perform additional soil removal. That Remedial Action is in progress now. The purpose is to remove some soil that previously met NGT standards, but does not meet the industrial RSLs for fulltime worker exposure. The ARNG made the decision to do additional soil removal to support the potential for fulltime workers in the future.

37. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?

No

38. What is the status of the remedial action for post-ROD changes?

That remedial action began in early November and the field work is expected to be completed by the middle of December.

39. What is the intended future use of the site?

Military Training is the intended future use. Specifically the site is slated to be used as a Multi-Purpose Machine Gun Range.

40. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?

No

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	Date: <i>Nov. 15, 2016</i>

41. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
The original ROD identified the Camp Ravenna perimeter fence as an engineering control for this site. Consequently, Camp Ravenna is required to perform very time-consuming and costly inspections of the full length of the perimeter fence on a quarterly basis. They have limited O&M funds; therefore, it is not always possible to make all fence repairs as soon as they are noted in inspection forms. Additionally, the installation status is such that the type of fence that is in place is not even required. The ESD for this site changed the LUCs so that the Camp Ravenna perimeter fence will no longer be one of the LUCs. However, this change will not be effective until the RA is complete and the RA report is accepted. At that time, a revised PMP will be submitted for Ohio EPA review and approval. Then, the perimeter fence will no longer be an engineering control for any of the AOCs that do not meet UU/UE.

42. Is the remedy functioning as intended?
Yes

43. Has any other information come to light that could call into question the protectiveness of the remedy?
No

44. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time: <i>1300 - 1400</i>	Date: <i>Oct 19, 2016</i>
Type: <input type="checkbox"/> Telephone <input checked="" type="checkbox"/> Visit <input checked="" type="checkbox"/> Other (completed via email)		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>US Army Corps of Engineers, Louisville District Office</i>			
Contact Made By			
Name: <i>Karen Keil</i>	Title: <i>Environmental Toxicologist</i>	Organization: <i>US Army Corps of Engineers, Buffalo District</i>	
Individual Contacted			
Name: <i>Angela Schmidt</i>	Title: <i>Risk Assessor</i>	Organization: <i>CELRL</i>	
Telephone No: <i>(502) 315-6313</i>		Street Address: <i>600 Dr. Martin Luther King Pl.</i>	
Fax No:		City, State, Zip: <i>Louisville, KY 40402</i>	
E-Mail Address: <i>Angela.L.Schmidt@usace.army.mil</i>			
Summary Of Conversation			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -10)			
<ol style="list-style-type: none"> What is your involvement with the project? <i>I have been the USACE project risk assessor and technical reviewer since 2008/2009.</i> Have any problems been encountered that required or will require changes to the remedial design or Record of Decision (ROD)? <i>Yes, the sites cannot be used as intended. We have difficulty using the site for military training land use as intended and have to basically clean it up again for residential or industrial land use. The depth of exposure/cleanup will be the actual depth of contamination, although Ohio EPA typically assumes a depth down to 13 feet (ft) below ground surface (bgs), which applies to residential exposure and not the depth for military training land use (for 0 to 4 ft bgs and 4 to 7 ft bgs) or with the expected surface soil exposure for commercial/industrial land use using the USEPA's composite worker receptor.</i> Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <i>There was a technical memorandum from OHARNG to Ohio EPA, signed February 2014. It stipulates that commercial/industrial land use and associated USEPA regional risk-based screening levels (RSLs) are protective of military training that would occur at RVAAP. However, it's not completely clear. The new POC at OHARNG (arrived after the memo was signed) recognized that the Risk Assessment Land Use Tech Memo confused some of the issues in the consideration of exposure as well as media and risk assessment. However, Ohio EPA continues to approve recent site documents, so it may not be necessary to revise the Tech Memo in order to obtain Ohio EPA concurrence on site decision-making documents. (Angela noted that the USEPA RSLs for industrial use doesn't really fit exposure assessment for a National Guard Trainee. A site specific exposure assessment was originally used to develop site-wide cleanup goals, as documented in 2009 and revised in 2012. She clarified how to update facility-wide cleanup goals (with equations, etc.) based on USEPA updates to recommended exposure factor values and toxicity criteria, and how to address sediment (vs. soil) contamination, which could raise the FWCUGs and relieve the Army of cleaning up sites unnecessarily.)</i> 			

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>1300 - 1400</i>
		Date:	<i>Oct 19, 2016</i>

4. What is the status of additional characterization sampling and the Feasibility Study (FS) addendum for these sites?
Sampling and analysis is incorporated into a FS Addendum. The pre-draft is currently under USACE review and the draft version will be available in early November. The Buffalo District Corps of Engineers can get a copy at that time.
5. What is the intended future use of the sites?
Military training with exposure to 7 ft bgs. The industrial/commercial cleanup standard will be applied to 13 ft bgs. Cleanup goals were set in the facility-wide cleanup goal document from 2010 but are not fully recognized by some Ohio EPA personnel.
6. Has environmental data been evaluated to determine if additional sampling and/or remediation is needed at Load Line 3 to address the presence of benzo(a)pyrene, Aroclor-1254, and manganese above the cleanup levels identified in the Interim ROD? (First Five-Year Review report recommendation #2)
Unsure, it seems it would be to the Army's benefit to look at these numbers and potential changes to ensure they are still protective and that the LUCS are still needed.
7. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
Maybe the fence is maintained?
8. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
There may be some smaller pockets needing LUCs and other areas that could be released. We had been taking samples across the AOC and averaging across the entire AOC to develop the exposure point concentrations (EPCs) for risk determination as referenced in Facility-Wide Human Health Risk Assessment Manual (FW HHRAM). We had a process in place to remove hot spots and then re-calculate exposure, but Ohio EPA did not agree with the approach. Ohio EPA wants EPCs developed across hot spots only. Removing outlying areas of the AOC from EPC development should allow many areas to meet residential use and eliminate the need for LUCs. Also, Ohio EPA does not recognize the bias in the sampling approach that we have used since imitating the IRP at Ravenna.
9. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
Yes, because OHARNG is not able to use the site due to monitoring requirements.
10. Is the remedy functioning as intended?
Yes, the remedy is functioning but the site is not being used as needed.
11. Has any other information come to light that could call into question the protectiveness of the remedy?
The commercial/industrial USEPA regional RSLs may not be protective of a military trainee exposure at the site and it is not site-specific.
12. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
Changes in the Tech Memo (for site-wide risk-based cleanup goal development) have made management of the site difficult and are not considerate for the Army.

Load Line 12 (RVAAP-12)

13. What is your involvement with the project?
I have been the USACE project risk assessor and technical reviewer since 2008/09.

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>1300 - 1400</i>	Date: <i>Oct 19, 2016</i>

14. Have any problems been encountered that required or will require changes to the remedial design or ROD?
Yes, the site cannot be used as intended. We have difficulty using the site for military training as intended and have to basically clean it up again for residential or industrial land use. The depth of exposure/cleanup will be the actual depth of contamination, although Ohio EPA typically assumes a depth down to 13 feet (ft) below ground surface (bgs), which applies to residential exposure and not the depth for military training land use (for 0 to 4 ft bgs and 4 to 7 ft bgs) or with the expected surface soil exposure for commercial/industrial land use using the USEPA's composite worker receptor.

15. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
There was a technical memorandum from OHARNG to Ohio EPA, signed February 2014. It stipulates that commercial/industrial land use and associated USEPA regional risk-based screening levels (RSLs) are protective of military training that would occur at RVAAP. However, it's not completely clear. The new POC at OHARNG (arrived after that memo was signed) recognized that the Risk Assessment Land Use Tech Memo confused some of the issues in the consideration of exposure as well as media and risk assessment. However, Ohio EPA continues to approve recent site documents, so it may not be necessary to revise the Tech Memo in order to obtain Ohio EPA concurrence on site decision-making documents. (Angela noted that the USEPA RSLs for industrial use doesn't really fit exposure assessment for a National Guard Trainee. A site specific exposure assessment was originally used to develop site-wide cleanup goals, as documented in 2009 and revised in 2012. She clarified how to update facility-wide cleanup goals (with equations, etc.) based on USEPA updates to recommended exposure factor values and toxicity criteria, and how to address sediment (vs. soil) contamination, which could raise the FWCUGs and relieve the Army of cleaning up sites unnecessarily.)

16. What is the intended future use of the site?
Military training with exposure to 7 ft bgs. The industrial/commercial cleanup standard will be applied to 13 ft bgs. Cleanup goals were set in the facility-wide cleanup goal document from 2010 but are not fully recognized by some Ohio EPA personnel.

17. What is the status of additional characterization sampling and the FS addendum for this site?
Sampling and analyses are incorporated into a draft FS Addendum. The pre-draft is currently under USACE review and the draft version will be available in early November. The Buffalo District Corps of Engineers can get a copy at that time.

18. Has the Property Management Plan (PMP) been updated to include the land use control requirements identified in the ROD and remedial design?
Unknown, I believe it needs to be.

19. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
Unsure, but I assume it is being completed as directed.

20. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Yes, because OHARNG is not able to use the site because of the monitoring requirements.

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>1300 - 1400</i>
		Date:	<i>Oct 19, 2016</i>

21. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
There may be some smaller pockets needing LUCs and other areas that could be released. We had been taking samples across the AOC and averaging across the entire AOC to develop the exposure point concentrations (EPCs) for risk determination as referenced in Facility-Wide Human Health Risk Assessment Manual (FW HHRAM). We had a process in place to remove hot spots and then re-calculate exposure, but Ohio EPA did not agree with the approach. Ohio EPA wants EPCs developed across hot spots only. Removing outlying areas of the AOC from EPC development should allow many areas to meet residential use and eliminate the need for LUCs. Also, Ohio EPA does not recognize the bias in the sampling approach that we have used since imitating the IRP at Ravenna.
22. Is the remedy functioning as intended?
Yes, but the AOC is not being used.
23. Has any other information come to light that could call into question the protectiveness of the remedy?
The commercial/industrial USEPA regional RSLs may not be protective of a military trainee exposure at the site and it is not site-specific.
24. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
Changes in the Tech Memo (for site-wide risk-based cleanup goal development) have made management of the site difficult and are not considerate for the Army.

Ramsdell Quarry Landfill (RVAAP-01)

25. What is your involvement with the project?
I have been the USACE project risk assessor and technical reviewer since 2008/09.
26. Have any problems been encountered that required or will require changes to the remedial design or ROD?
A ROD amendment was prepared in 2013 to address the presence of friable asbestos.
27. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
None
28. Has the PMP been updated to include the land use control requirements identified in the ROD, ROD amendment, and remedial designs?
Unknown, I believe it needs to be.
29. What is the intended future use of the site?
Landfill, restricted access.
30. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
Routine LUC monitoring is being performed since the ROD amendment remedial action was implemented.
31. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
None
32. Has any other information come to light that could call into question the protectiveness of the remedy?
None
33. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>1300 - 1400</i>
		Date:	<i>Oct 19, 2016</i>

Winklepeck Burning Grounds (RVAAP-05)

34. What is your involvement with the project?
I have been the USACE project risk assessor and technical reviewer since 2008/09.
35. Have any problems been encountered that required or will require changes to the remedial design or ROD?
There have been many issues with the site. The Army identified small areas that needed to be remediated to meet unrestricted (residential) land use at the Site. The Ohio EPA did not agree with this approach. The Army prepared a RAAD that was approved but afterwards it was determined that a full time receptor needed to be added and the screening had to be redone in areas where there were elevated concentrations not necessarily related to the overall distribution from a site-wide basis.
36. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
None
37. What is the status of the remedial action for post-ROD changes?
Unsure
38. What is the intended future use of the site?
Restricted access (closed landfill).
39. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
The intended future use of this site has changed and additional areas will be remediated.
40. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
The majority of monitoring is either done for safety from UXO or for OSHA standards.
41. Has any other information come to light that could call into question the protectiveness of the remedy?
The commercial/industrial USEPA regional RSLs may not be protective of a military trainee exposure at the site and is not site-specific.
42. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
Redo the analysis and do not consider the composite receptor as a full time occupational exposure potential.

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time: <i>11:30 am</i>	Date: <i>Nov. 08, 2016</i>
Type: <input type="checkbox"/> Telephone <input type="checkbox"/> Visit <input checked="" type="checkbox"/> Other (completed via email)		<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>Not applicable</i>			
Contact Made By			
Name: <i>James R Stachowski, PE</i>		Title: <i>Environmental Engineer</i>	
Organization: <i>US Army Corps of Engineers, Buffalo District</i>			
Individual Contacted			
Name: <i>Allan Brillinger</i>		Title: <i>Program Manager</i>	
Organization: <i>Vista Environmental Services</i>			
Telephone No: <i>(330) 872-8009</i>		Street Address: <i>1438 State Route 534 SW</i>	
Fax No:		City, State, Zip: <i>Newton Falls, OH 44444</i>	
E-Mail Address: <i>allan.brillinger@vistasciences.com</i>			
Summary Of Conversation			
Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -11)			
1. What is your involvement with the project? <i>None</i>			
Load Line 12 (RVAAP-12)			
2. What is your involvement with the project? <i>None</i>			
Ramsdell Quarry Landfill (RVAAP-01)			
3. What is your involvement with the project? <i>Vista Sciences Corporation (VSC) has been under contract with USACE for over 10 years to provide maintenance and inspection services for the Ramsdell Quarry Landfill (RQL). These services have historically included annual mowing, soil repairs (as needed), and weekly inspections.</i>			
4. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)? <i>No</i>			
5. Has the PMP been updated to include the land use control requirements identified in the ROD, ROD amendment, and remedial designs? <i>Yes, VSC's PMP has been updated to include inspections of the Land Use Controls (LUCs) that were initiated in December 2014.</i>			
6. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy? <i>Yes, on behalf of OHARNG, VSC as of September 2016 will be conducting quarterly inspections and submitting the quarterly Closed Municipal Solid Waste (MSW) Landfill Inspection checklist to the Ohio EPA. VSC will also be submitting an annual report to the Ohio EPA to comply with the regulations for closed MSW landfills in Ohio. Fulfilling these reporting requirements will improve the record-keeping for the facility and will ensure the continued effectiveness of the LUCs and cap system in place.</i>			

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>11:30 am</i>	Date: <i>Nov. 08, 2016</i>

7. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
The addition of the quarterly and annual report have not significantly increased the costs for VSC's involvement.
8. Is the remedy functioning as intended?
Yes
9. Has any other information come to light that could call into question the protectiveness of the remedy?
No
10. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

Winklepeck Burning Grounds (RVAAP-05)

11. What is your involvement with the project?
VSC provides quarterly inspections and reporting for the Winklepeck Burning Grounds (WBG) LUCs.
12. Do you have any comments, suggestions, or recommendations regarding the project (i.e. design, construction documents, constructability, management, regulatory agencies, etc.)?
No
13. Are routine inspections performed and records maintained? If so, describe how they are performed and their frequency. Is the reporting up to date?
VSC conducts and submits quarterly LUC inspection reports to the Ohio EPA. The LUC inspection involves inspecting the Camp Ravenna perimeter fence (which is a LUC for WBG) and documenting any damage to the fence, and conducting interviews with appropriate personnel to ensure the LUCs are in place and operating effectively. The quarterly and annual reports are all up to date.
14. Have there been significant changes in the monitoring requirements, maintenance schedules, or sampling routines since start-up? If so, do they affect the remedy?
No
15. Have there been unexpected monitoring/maintenance difficulties or increased costs at the site since start-up? If so, please give details.
No
16. Has any other information come to light that could call into question the protectiveness of the remedy?
No
17. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
None

INTERVIEW RECORD

Ohio EPA (Nov. 23, 2016)

General Comments

Rodney Beals:

The current copy of the Property Management Plan in the Ohio EPA file does not include LUCs for Ramsdell Quarry or Load Line 12. This was identified as an issue in the first five-year review (August 2012).

The 2007 Interim ROD for Load Lines 1 - 4 did not include LUCs, but should have since waste was left in place. Ohio EPA recognizes that OHARNG has not used this AOC and that additional work is on-going that will support a less restrictive future use.

Load Lines 1, 2, 3, and 4

1. What is your role and responsibility with this project?

Response: Sue Watkins is project lead reviewer for the Winklepeck Burning Grounds revised ROD activities and lead reviewer for the additional remedial investigation activities at Load Lines 1 – 4 and 12.

2. What is your overall impression of the project (general sentiment)?

Response: The purpose of sampling at these AOCs is to address questions regarding potential contamination dragged out from areas that had undergone removal activities after other areas had been cleaned up. Changes in the land use receptors has also resulted in re-evaluation of these AOCs. There are some challenges regarding the interpretation of previous sample collection activities through incremental sampling and ensuring exposure areas are adequately characterized.

3. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results.

Response: Ohio EPA participates in monthly calls with the USACE and Ohio National Guard. We receive updates through this venue. We usually conduct site visits to these AOCs annually. There has not been actual changes to the use of these AOCs.

4. Have there been any complaints, violations, or other incidents related to the site requiring a response by your office? If so, please give details of the events and results of the responses.

Response: None

5. Do you feel well informed about the site's activities and progress?

Response: I don't have a great sense when sampling activities are being conducted. Results are provided to us when they have been compiled into a report. Ohio EPA provided comments on the RI in February 2016.

6. Is the remedy functioning as intended?

Response: Soil removal activities have been conducted at these load lines in the past. The planned additional RI activities are intended to determine if additional removal actions are needed. I'm not sure of the status of the sampling activities.

INTERVIEW RECORD

Ohio EPA (Nov. 23, 2016)

7. Has any other information come to light that could call into question the protectiveness of the remedy?

Response: No

8. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

Response: The monthly calls could include more details regarding status of activities at these AOCs. Generally the monthly calls focus only on deliverable reports and the timing of getting these reports to each other.

Load Line 12

9. What is your overall impression of the project (general sentiment)?

Response: Focus of the additional sampling is on the surface water and sediments at this AOC. Ohio EPA provided comments on October 24, 2016 on the Draft Phase III Remedial Investigation. Ensuring that detections of COCs on this AOC are evaluated and considered

10. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results.

Response: Ohio EPA participates in monthly calls with the US ACE and Ohio National Guard. We receive updates through this venue. We usually conduct site visits to the AOCs annually. There has not been changes to the use of this AOC.

11. Have there been any complaints, violations, or other incidents related to the site requiring a response by your office? If so, please give details of the events and results of the responses.

Response: None

12. Do you feel well informed about the site's activities and progress?

Response: We have conversations with the US ACE regarding RI development to reach consensus. I don't have a great sense when sampling activities are being conducted. Results are provided to us when they have been compiled into a report for our review.

13. Is the remedy functioning as intended?

Response: Yes, however the evaluation of sediments and surface water as well as sampling the ground water in the area of this AOC will help evaluate the success of prior soil removal activities in this AOC. Other investigations (site wide sewers, site wide ground water and Atlas Scrap) may show that these other AOC may be impacting Load Line 12 or that there may be sources of COCs remaining on LL 12. These other AOC evaluations underway as well as Ohio EPA's recommendation to further evaluate surface water/sediments on Load Line 12 will help evaluate these questions.

14. Has any other information come to light that could call into question the protectiveness of the remedy?

Response: Not at this time.

INTERVIEW RECORD

Ohio EPA (Nov. 23, 2016)

15. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

Response: The monthly calls could include more details regarding status of activities at the AOCs. Generally the monthly calls focus only on deliverable reports and the timing of getting these reports.

Winklepeck Burning Grounds

16. What is your overall impression of the project (general sentiment)?

Response: The cleanups conducted on this AOC appear to have addressed direct contact exposures to COCs. The AOC still has a Land Use Control in place (fence), but this will no longer be needed after the current remedial activities outlined in the Sept 2015 ESD changes are completed. The fence will remain around the entire RVAAP to keep trespassers from entering the facility, but it will not be needed for environmental remedial measures at Winklepeck. Ground water in this area will continue to be monitored through site wide ground water monitoring activities. Winklepeck Burning Grounds continues to be used actively by the Ohio National Guard for military training. MEC items were found during the recent post ROD remedy activities. It is likely the MEC will continue to be discovered at Winklepeck over time.

17. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results.

Response: In September 2015 Ohio EPA approved the ESD for Winklepeck. The land use changes at this AOC required additional removal actions at several former burn pad locations on the AOC. Ohio EPA recently visited Winklepeck to view the remedy underway.

18. Have there been any complaints, violations, or other incidents related to the site requiring a response by our office? If so, please give details of the events and results of the responses.

Response: I am not aware of any complaints, violations or incidents that required a response by our office.

19. Do you feel well informed about the site's activities and progress?

Response: Yes, I received notice both via e-mail and letter that activities were going to start at this AOC. The activities began on October 31, 2016.

20. Is the remedy functioning as intended?

Response: On-going activities at Winklepeck are designed to address use changes. Existing LUCs are in place until the remedy is complete.

21. Has any other information come to light that could call into question the protectiveness of the remedy?

Response: No

22. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

INTERVIEW RECORD

Ohio EPA (Nov. 23, 2016)

Response: Ohio EPA visited the AOC on November 10th. All parties involved with the current remedial actions were conducting the remedy in a manner that seems consistent with the post – ROD changes.

Ramsdell Quarry Landfill

Nicholas Roope is the Ohio EPA Site Coordinator for Ramsdell Quarry Landfill AOC.

23. What is your overall impression of the project (general sentiment)?

Response: My overall impression of the site is that it remains protective to human health with restricted access to the area, and a fence that is being maintained to deter entrance to the area. There is still work remaining to maintain protection of the environment under different programs (MMRP, surface water and sediment, etc.).

24. Have there been routine communications or activities (site visits, inspections, reporting activities, etc.) conducted by your office regarding the site? If so, please give purpose and results.

Response: Routine communications have been made. Multiple site visits have occurred in the last year (2016). The site visits were prompted by the surface water and sediment investigation at the site. During that investigation the integrity of the cap, signs, and fence as part of the LUC were completed and noted to be in excellent condition. The results of the previous site visit at low water level revealed some solid wastes, and Asbestos Containing Material (ACM). Other than that training has occurred to inform guard staff why the site is restricted, and the requirement of signing in to access the site is completed routinely.

25. Have there been any complaints, violations, or other incidents related to the site requiring a response by our office? If so, please give details of the events and results of the responses.

Response: To the best of my knowledge, I am unaware of any complaints, violations, or incidents requiring response from our agency.

26. Do you feel well informed about the site's activities and progress?

Response: Yes, I feel well informed about the site's activities and progress, and have been in contact with Kathryn Tait for every inspection to date.

27. Is the remedy functioning as intended?

Response: The fence to prevent human exposure and access to the site appears to be in good shape, and acts as an effective barrier with signs evenly spaced and restricting access and digging of any kind. The cap on the surface appears to be well vegetated to prevent runoff and the gradual weathering of the cap. However, after viewing the water at low levels in the wetland it was evident that some material is uncapped, and at times of drought allows for complete access to ACM and other wastes. However, the area is restricted, no digging has occurred, and the exposed items normally are not exposed due to the contact with a wetland. Further discussion may be warranted.

28. Has any other information come to light that could call into question the protectiveness of the remedy?

Response: After viewing the water at low levels in the wetland it was evident that some material is uncapped, and at times of drought ACM and other wastes are exposed. However, the area is restricted.

INTERVIEW RECORD

Ohio EPA (Nov. 23, 2016)

29. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

Response: I believe the site is being properly managed to maintain safety and provides protection to human health. However, I have concerns for the remaining material that is below the surface of the water in the wetland area may have the potential to cause an environmental impact and human exposure at low water levels (i.e. during a drought).

INTERVIEW RECORD

Site Name: <i>Camp Ravenna</i>	EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time: <i>1447 hrs.</i>	Date: <i>Nov. 5, 2016</i>
Type: <input type="checkbox"/> Telephone <input type="checkbox"/> Visit <input checked="" type="checkbox"/> Other (completed via email)	<input type="checkbox"/> Incoming <input type="checkbox"/> Outgoing	
Location of Visit: <i>Not applicable</i>		

Contact Made By

Name: <i>James R Stachowski, PE</i>	Title: <i>Environmental Engineer</i>	Organization: <i>US Army Corps of Engineers, Buffalo District</i>
--	---	--

Individual Contacted

Name: <i>Tom Tadsen</i>	Title: <i>RAB Co-Chair</i>	Organization: <i>RVAAP RAB</i>
--------------------------------	-----------------------------------	---------------------------------------

Telephone No: <i>330-256-0921</i> Fax No: <i>N/A</i> E-Mail Address: <i>ttadsen@neo.rr.com</i>	Street Address: <i>7657 W Lake Blvd</i> City, State, Zip: <i>Kent OH 44240</i>
---	---

Summary Of Conversation

General

1. How does the community use Camp Ravenna in general?
Community members train there as military personnel. Contractors work there and contribute to the local economy. The Ohio Army National Guard provides occasional facility tours for area civic and other organizations. Hunters apply to hunt the unrestricted portions of the facility during controlled deer hunts each fall. Vendors provide support services, such as fuel and prepared foods for troops in training.

Load Lines 1, 2, 3, and 4 (RVAAP-08, -09, -10, & -11)

2. What is your overall impression of the project (general sentiment)?
The project has been going well and progressing as planned, subject to budgetary limitations. During the project, some procedures and specific goals have changed as a result of unexpected findings onsite. The army has honored its pledge to follow the evidence in its deliberate search for contaminants and has spent extra care in ensuring that any known contaminated areas were remediated to the required standard, and any contaminants in surface and groundwater were tracked accurately, whether the contaminants were limited to the area within the installation boundary, or outside.
3. What effects have site operations had on the surrounding community?
The surrounding community has always been very suspicious that the Army has been hiding something inside the fence. Suspicions have led to development of many rumors over the years about what goes on inside the fence. The surrounding communities are more concerned about potential contamination leaving the facility and potential long term effects of the contamination. When Load Line 9 was burned, local opposition was at its highest ever. It was a good idea for the Army to finish remediating and demolishing buildings by means other than fire.

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>1447 hrs.</i>
		Date:	<i>Nov. 5, 2016</i>

4. Are you aware of any community concerns regarding the site or its operation and administration? If so, please give details.
The community is quite concerned about hexavalent chromium leaving the facility in the groundwater, it's eventual resting place and potential impacts on flora and fauna – mostly on humans, though. The community is also concerned that the explosive and SVOC contamination in groundwater leaving the installation is followed to its eventual resting place and properly treated and/or disposed of. A lingering rumor has been the suspected occurrence of cancer clusters in the Minyoung Road area historically. The Director of the Portage County Health Department made a RAB presentation years ago, and disproved the existence of cancer clusters related to RVAAP, but the suspicion still lingers and infrequently rears its ugly head. There's also concern about groundwater contamination from Ramsdell Quarry Landfill, based on fairly unique potentiometric results there, based on ground water flow. The community is always concerned about development of live-fire weapons ranges, especially when they are overlaid on contaminated ground. Winklepeck Burning Ground is one such area. The public would like to see it remediated to an unrestricted use category and all unexploded ordnance and contaminants removed.
5. Are you aware of any events, incidents, or activities at the site such as vandalism, trespassing, or emergency responses from local authorities? If so, please give details.
There have been very infrequent cases of trespassing and vandalism inside the fence over the years, and only a few times law enforcement agencies were called to apprehend and expel trespassers. In the fairly recent past, a number of police agencies chased two suspected felons into the installation through the Charlestown gate, then had to apprehend and arrest them. Over many years (since the end of WWII), poachers from outside the Northern boundary have cut the fence and poached deer and other wildlife. The Portage County (ODO) Wildlife Enforcement Officer responded to many of these calls and removed a number of poachers. A car drove through the fence on State Route 5 at the George Road Sewage Plant sometime in the last ten years.
6. Do you feel well informed about the site's activities and progress?
Yes
7. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
Follow the contamination emanating from load lines 3 and 12 to its conclusion and initiate appropriate remedial actions.

Load Line 12 (RVAAP-12)

8. What is your overall impression of the project (general sentiment)?
Progressing as scheduled.
9. What effects have site operations had on the surrounding community?
Very little, if any, except causing anxiety over unknowns.
10. Are you aware of any community concerns regarding the site or its operation and administration? If so, please give details.
Yes – specifically, establishment, memorialization and enforcement of land use controls – as in the Landfill North of WBG.
11. Are you aware of any events, incidents, or activities at the site such as vandalism, trespassing, or emergency responses from local authorities? If so, please give details.
Load Line 12 was the site of a fatal building collapse during the building demolition process.
12. Do you feel well informed about the site's activities and progress?
Yes

INTERVIEW RECORD

Site Name:	<i>Camp Ravenna</i>	EPA ID No.:	<i>OH5210020736</i>
Subject:	<i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>	Time:	<i>1447 hrs.</i>
		Date:	<i>Nov. 5, 2016</i>

13. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?

Follow the contamination emanating from Load Line 12 to its conclusion and initiate appropriate remedial actions.

Ramsdell Quarry Landfill (RVAAP-01)

1. What is your overall impression of the project (general sentiment)?
Good – somewhat concerned. Want to ensure that there's no residual contamination from dumping, VOC's, SVOC's and explosives migrating outward in the ground water.
14. What effects have site operations had on the surrounding community?
Not much
15. Are you aware of any community concerns regarding the site or its operation and administration? If so, please give details.
No
16. Are you aware of any events, incidents, or activities at the site such as vandalism, trespassing, or emergency responses from local authorities? If so, please give details.
No
17. Are you aware of any events, incidents, or activities at the site such as vandalism, trespassing, or emergency responses from local authorities? If so, please give details.
No
18. Do you feel well informed about the site's activities and progress?
Yes
19. Do you have any comments, suggestions, or recommendations regarding the site's management or operation?
No

Winklepeck Burning Grounds (RVAAP-05)

20. What is your overall impression of the project (general sentiment)?
The project has progressed in starts and stops since the beginning, due to found UXO and contamination not memorialized clearly in historical records. Halts in re-development projects resulted, delaying re-use.
21. What effects have site operations had on the surrounding community?
Very little. Occasionally, neighbors comment on hearing weapons firing when the winds carry the noise in their direction. All ranges comply with required federal and state noise and noise control requirements, so this is really a non-issue.
22. Are you aware of any community concerns regarding the site or its operation and administration? If so, please give details.
The community is concerned anytime the military weaponry to be used is superseded by more modern or newer systems with different range/targetry requirements. The Army (OHARNG) responds to Army requirements and makes changes IAW directives from DA, when funding supports required modifications.
23. Are you aware of any events, incidents, or activities at the site such as vandalism, trespassing, or emergency responses from local authorities? If so, please give details.
No
24. Are you aware of any events, incidents, or activities at the site such as vandalism, trespassing, or emergency responses from local authorities? If so, please give details.
No

INTERVIEW RECORD			
Site Name: <i>Camp Ravenna</i>		EPA ID No.: <i>OH5210020736</i>	
Subject: <i>Second Five-Year Review of Remedial Actions for Load Lines 1 – 4, Load Line 12, Ramsdell Quarry Landfill, and Winklepeck Burning Grounds</i>		Time: <i>1447 hrs.</i>	Date: <i>Nov. 5, 2016</i>
<p>25. Do you feel well informed about the site's activities and progress? <u>Generally, it might be good to have an update from the OHARNG on intended range modifications, environmental considerations and potential problem areas resulting from modifications.</u></p> <p>26. Do you have any comments, suggestions, or recommendations regarding the site's management or operation? <u>No</u></p>			

ATTACHMENT 7
ARAR Evaluation

ARAR EVALUATION

BACKGROUND

Section 121 (d)(2)(A) of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) specifies that remedial actions must meet federal standards, requirements, criteria, or limitations that are determined to be legally applicable or relevant and appropriate requirements (ARARs). ARARs are those standards, criteria, or limitations promulgated under federal or state law that specifically address a hazardous substance, pollutant, contaminant, remedial action, location, or other circumstance at a CERCLA site. To-be-considered (TBC) criteria are non-promulgated advisories and guidance that are not legally binding, but should be considered in determining the necessary level of cleanup for protection of human health or the environment.

The final remedy selected for a site should be designed to meet all chemical-specific, action-specific, and location-specific ARARs and consider all TBCs. Chemical-specific ARARs are health- or risk-based numerical values for individually listed contaminants in specific media. Action-specific ARARs are technology- or activity-based limitations or requirements that are selected to accomplish a remedy. Location-specific ARARs are restrictions placed on the concentration of chemicals or conduct of operations based on the location of a site.

OBJECTIVE

Camp Ravenna, formerly known as the Ravenna Army Ammunition Plant (RVAAP), is located in northeastern Ohio within Portage and Trumbull counties. The facility was constructed in 1940 and 1941 and used for ammunition assembly, loading, and demilitarization activities. It encompassed 21,683 acres. Administrative accountability for all of the acreage was transferred to the U.S. Property and Fiscal Officer in September 2013 and licensed to the Ohio Army National Guard as a military training site known as Camp Ravenna Joint Military Training Center (Camp Ravenna).

This is the second five-year review of the following Camp Ravenna sites:

- Load Line 1
- Load Line 2
- Load Line 3
- Load Line 4
- Load Line 12
- Winklepeck Burning Grounds
- Ramsdell Quarry Landfill

This evaluation was prepared to address Question B of the CERCLA five-year review, “*Are the exposure assumptions, toxicity data, cleanup levels, and remedial action objectives used at the time of the remedy selection still valid?*”

EVALUATION

Load Lines 1 Through 4

Industrial operations at RVAAP primarily consisted of 12 munitions assembly facilities referred to as load lines (LLs). LL 1-4 were used between 1941 and 1971 to melt and load trinitrotoluene

(TNT) and Composition B (a mixture of TNT and cyclotrimethylenetrinitramine [RDX]) into large-caliber shells. In 1951, soils contaminated with accumulated explosives were removed from LL 1 and replaced with clean fill.

Chemical contaminants detected in soil and dry sediment at LLs 1-4 above risk-based cleanup goals consisted of inorganics, explosives, polychlorinated biphenyls (PCBs) and semivolatile organic compounds (SVOCs). The soil and sediment contamination detected at LLs 1-4 was generally surficial in nature, between 0 and 4 feet (ft) below ground surface (bgs). In isolated areas, the contamination may have extended to 6 ft bgs.

The remedy selected in the Interim Record of Decision (ROD) [USACE 2007] to address contaminated surface and subsurface soils and dry sediment at LLs 1-4 consisted of the following:

- Excavation of discrete areas of contaminated surface and subsurface soils and dry sediment with concentrations of contaminants exceeding risk-based clean-up goals
- Temporary on-site storage via stockpiling for characterization
- Off-site disposal of soils at a permitted landfill and, as needed, disposal at a TSCA and/or RCRA permitted landfill
- Replacement of excavated material with clean compacted backfill
- Groundwater monitoring to ensure the remedy did not impact groundwater
- Maintenance of building slabs and foundations
- Five year reviews in accordance with CERCLA 121(c) and 300.430(f)(4)(ii)

No chemical-specific ARARs were identified in the Interim ROD [USACE 2007]. The location- and action-specific ARARs, listed in Attachment 1 of the Interim ROD and included in Appendix A of this ARAR evaluation, were potential ARARs for the conduct of the remediation, and therefore are no longer relevant and appropriate.

The U.S. Army issued a change memorandum to the Interim ROD [Army 2008] which committed to sampling soil underneath concrete slabs and building foundations to determine the need to perform a removal action of contaminated soil.

Between August and November of 2007, 1,752 tons of PCB soils and 9,489 tons of non-hazardous soils were excavated from LLs 1-4 [USACE 2008]. Following remedial action, sub-slab soil sampling was conducted to determine if the removal of contaminated sub-slab soil was necessary. The sub-slab soil remedial completion report [URS 2010] documents the removal of contaminated sub-slab soil at building footprints within Load Lines 2 and 3. It also documents the removal and disposal of soil piles stored within three buildings at Load Line 4 (i.e., G-1, G-1A and G-3). This material was removed so that these three buildings could be demolished, the slabs removed, and the underlying soil subsequently sampled. The subsurface characterization performed after the floor slabs were removed extended to a depth of 4 ft bgs and the resulting subsurface samples were field screened only.

In December 2009 and August 2010, subsurface soil beneath former building slabs was sampled using a subsurface soil incremental sampling methodology (ISM) to determine if there was residual soil contamination above risk-based project cleanup goals over the depth range of 1 to 7 ft bgs [Prudent 2011].

Additional ISM sampling was conducted at LLs 1-4 and other areas of concern in June and July 2011 to bound areas requiring further soil remediation and documented in a characterization

sampling report [Prudent 2013]. Table 7-2 of the characterization report [Prudent 2013] identifies characterization samples exceeding risk-based child resident, adult resident, and National Guard trainee cleanup goals.

The sample and analysis plan addendum for surface water and sediment at LLs 1-4 [Leidos 2016] provides recommendations, procedures, and locations for conducting surface water and sediment sampling at LLs 1-4 to define the nature and extent of contamination for incorporation into a feasibility study addendum for soil, sediment, and surface water at LLs 1-4 and LL 12.

There are no new standards or performance requirements affecting the protectiveness of the remedy at LLs 1-4. A review of the risk assessment methods and toxicity criteria that prompted remedial action at LLs 1-4 is located in Attachment 8.

CONCLUSION

There are no changes to the ARARs or newly promulgated or modified requirements of federal or state environmental laws that would change the protectiveness of the remedy implemented at LLs 1 - 4.

RVAAP-12 (Load Line 12)

From 1946 to 1949, LL 12 was used to produce ammonium nitrate for explosives and fertilizers prior to its use as a weapons demilitarization facility [SAIC 2006b].

Arsenic was detected in dry sediment in a main ditch at LL 12 above the risk-based cleanup goals of 31 milligrams per kilogram (mg/kg) for a National Guard trainee (mounted training with no digging).

The remedy selected in the ROD for LL 12 [SAIC 2009b] to address arsenic in dry sediment in the main ditch consisted of excavation and off-site disposal of contaminated soil and dry sediment above National Guard Trainee clean-up goals. Components of the selected remedy included:

- Remedial design plan
- Excavation
- Handling of waste materials
- Off-site disposal
- Confirmatory sampling
- Restoration
- Land use controls
- Five-year reviews

No chemical- or location-specific ARARs were identified in the ROD [SAIC 2009b]. The action-specific ARARs, listed in Attachment A of the ROD and included in Appendix A of this ARAR evaluation, were potential ARARs for the conduct of the remediation, and therefore are no longer relevant and appropriate.

In June 2010, approximately 1.212 tons of non-hazardous material was transported off-site for disposal. Table 7-2 of the Remedial Action Report [SAIC 2010] shows that the confirmation sample results below the risk-based cleanup goal.

There are no new standards or performance requirements affecting the protectiveness of the remedy at LL 12. A review of the risk assessment methods and toxicity criteria that prompted remedial action at LL 12 is located in Attachment 8.

CONCLUSION

There are no changes to the ARARs or newly promulgated or modified requirements of federal or state environmental laws that would change the protectiveness of the remedy implemented at LL 12.

RVAAP-05 Winklepeck Burning Grounds

The Winklepeck Burning Grounds (WBG) is a 200-acre site located in the central part of Camp Ravenna. Historical activities at WBG included destruction of explosives in munitions, bulk explosives, propellants, and explosives-contaminated combustible material using open burning. Approximately 180 acres of WBG has been used for a Mark 19 (MK19) Grenade Machinegun Range, a target practice range for use in firing non-explosive practice rounds. In advance of site transfer and range construction, the U.S. Army Joint Munitions Command removed munitions and explosives of concern (MEC) in August 2005.

Chemical contaminants detected in soil and dry sediment at WBG above risk-based cleanup goals consisted of the explosive RDX and polycyclic aromatic hydrocarbons (benzo(a)pyrene, dibenz(a,h)anthracene, benzo(a)anthracene, benzo(b)fluoranthene, and indeno(1,2,3-cd) pyrene).

A ROD was signed on 19 August 2008 [SAIC 2008] that established a selected remedy with the following components for COCs in soil and dry sediment:

- clearing of vegetation
- geophysical surveys and visual inspections for identifying metal debris
- removal of transite and friable asbestos from the surface and subsurface within the footprint of Pad 70
- excavation of contaminated soil by layers to a depth of 0.3 to 1.2 meters (1 to 4 ft)
- screening (sifting) of the excavated soil for metal debris (potential MEC)
- confirmation sampling of the chemical characteristics of the remaining soil and for the absence of visible asbestos within the sides and bottom of the excavation
- multi-increment sampling and testing of sifted soil to determine disposal requirements
- disposal of contaminated soil (above remedial goals) at an approved off-site facility
- backfill of the excavations using fill material from a source approved by the U. S. Army and Ohio EPA
- site restoration
- implementation of LUCs for the site
- conducting 5-year reviews of the performance of the selected remedy

No chemical-specific ARARs were identified in the ROD [SAIC 2008]. Location- and action-specific ARARs, listed in Table 4 of the ROD and included in Appendix A of this ARAR evaluation, were potential ARARs for the conduct of the remediation, and therefore are no longer relevant and appropriate.

A total of 7,294 cubic yards of soils contaminated with transite ACM, friable asbestos, and/or MEC was excavated from WBG Pads 61/61A, 67, and 70 to protect future range maintenance soldiers from exposure to contaminants in soil exceeding risk-based cleanup goals listed in the

WBG ROD [SAIC 2008]. Although ACM (transite) was present in the soil at pads 61/61A and 70, the Ohio Department of Health did not consider soil excavation and processing operations an abatement operation. Therefore, the excavations were not required to be performed in accordance with State of Ohio (Ohio Administrative Code [OAC] 3745-20) asbestos emission control regulations. However, the loadout of asbestos-contaminated soil for off-site disposal was considered an asbestos abatement operation and was conducted in accordance with 40 CFR Part 61, Subpart M and State of Ohio (OAC 3745-20) asbestos emission control regulations [MKM 2009].

The remedial action was conducted on the basis of a limited site characterization to accelerate the timeframe in which the AOC could be developed and used as a MK19 Range. Although remedial actions were completed for WBG, the associated LUCs/restrictions placed on the AOC limited the use and future development of the AOC. Additional development of the AOC as a Multi-Purpose Machine Gun range was planned and therefore the AOC was reassessed to fully define the nature and extent of remaining contamination (if any) and LUCs/restrictions were re-evaluated to facilitate range construction and future use and management of the AOC as an operational range.

A 2015 Explanation of Significant Differences [USACE 2015] documents additional areas of soil excavation required to meet the commercial/industrial land use and associated changes to the LUCs. The only LUCs for the WBG AOC are:

- The AOC cannot be used for unrestricted (residential) land use unless or until additional evaluation shows that risk levels resulting from residual contamination have been reduced to levels acceptable for residential land use and any residual MEC hazards have been removed
- Groundwater use or extraction of groundwater located at or underlying WBG or any portion thereof is prohibited, except for the following:
 - The installation, development, purging, and sampling of new or existing monitoring wells in accordance with the most recent Facility-Wide Sampling and Analysis Plan as part of the Area of Concern (AOC)-specific Installation Restoration Program, the Facility-Wide Ground Water Monitoring Program Plan (FWGWMPP), or the Facility-Wide Groundwater Remedial Investigation
 - The modification of existing monitoring wells, if necessary, to allow for construction on the range
 - The abandonment and replacement of monitoring wells damaged by activities or removed for construction, and abandonment of wells no longer utilized as part of IRP or FGWMPP activities, in accordance with Ohio EPA guidance, the most recent Facility-Wide Sampling and Analysis Plan, and applicable OAC requirements

The Explanation of Significant Differences did not identify any changes to the ARARs listed in the ROD.

There are no new standards or performance requirements affecting the protectiveness of the remedy at the WBG. A review of the risk assessment methods and toxicity criteria that prompted remedial action at WBG is located in Attachment 8.

208 **CONCLUSION**

209 There are no changes to the ARARs or newly promulgated or modified requirements of federal
210 or state environmental laws that would change the protectiveness of the remedy implemented at
211 WBG.

212 **RVAAP-01 Ramsdell Quarry Landfill**

213 The Ramsdell Quarry landfill (RQL) is a 14-acre abandoned quarry with a 10-acre unlined
214 landfill that was used for domestic, commercial, industrial, and solid wastes that included
215 explosives (TNT and Composition B), napalm, gasoline, acid-dip liquor, annealing residue,
216 aluminum chloride, and inert material. Land surface burning was also performed to destroy
217 waste explosives from Load Line 1 and napalm bombs. A four-acre portion of the landfill was
218 operated as a state of Ohio permitted sanitary landfill in 1978 and was closed under state of Ohio
219 solid waste regulations in 1990.

220 Chemical contaminants detected in soil and dry sediment at RQL above risk-based cleanup goals
221 consisted of polycyclic aromatic hydrocarbons (benzo(a)anthracene, benzo(a)pyrene,
222 benzo(b)fluoranthene, dibenzo(a,h)anthracene, and indeno(1,2,3-cd) pyrene).

223 A ROD was signed on 20 August 2009 [SAIC 2009a] that established a selected remedy for
224 excavation and off-site disposal of chemically-contaminated soil and dry sediment. Other
225 components of the remedy included LUCs and five-year reviews to assess performance of the
226 remedial action. Remediation started in 2010 and was not completed because asbestos-containing
227 material (ACM) was encountered in the subsurface. The presence of ACM in the landfill was
228 not known prior to discovery, and the ROD did not account for this material. The excavation
229 was stopped once ACM was no longer visible, and the excavated ACM was disposed off-site.
230 Not all of the chemically-contaminated areas were remediated. Because of the discovery of
231 friable ACM, new remedial alternatives were evaluated and the selected remedy was established
232 in a ROD Amendment [SAIC 2013].

233 The remedy selected in the ROD amendment consisted of the following:

- 234 • Installation of a fence at the perimeter of RQL to encompass the closed landfill, quarry
235 bottom, and wetlands
- 236 • Implementing a best management practice to remove surficial ACM through non-
237 intrusive/no-digging methods

238 Part V of the ROD amendment refers to the RQL feasibility study [SAIC 2006a], the original
239 ROD [SAIC 2009a], and OAC 3745-20-07 for ARARs.

240 Many of the action-specific ARARs, listed in Table 4-1 of the RQL feasibility study and
241 Attachment A of the original ROD and included in Appendix A of this ARAR evaluation, were
242 potential ARARs for RCRA hazardous waste that would be disposed of on-site, and therefore are
243 no longer relevant and appropriate.

244 Part III of the ROD amendment states that the discovery of ACM in RQL during the
245 implementation of 2010 remedial action, under the original ROD invoked the following relevant
246 and appropriate requirements stated in OAC, Asbestos Emissions Control ~ OAC 3745-20 and
247 Standard of Inactive Asbestos Waste Disposal Sites ~ OAC 3745-20-07:

- 248 1. Discharge no visible emissions to the outside air

2. Cover ACM with at least 6 inches of compacted non-ACM, and establish and maintain a cover of vegetation on the area adequate to prevent exposure to the ACM
3. Cover ACM with at least 2 ft compacted non-ACM and maintain the cover to prevent exposure to the ACM

Section 7.0 of the remedial design report [Leidos 2014] stated, “*After the perimeter fence is installed, there is no additional requirement for ACM removal, as access and land use restrictions at RQL will ensure no visible emissions will be released to the outside air in accordance with Ohio Administrative Code (OAC) 3745-20-01.*” Section 10.0 of the remedial design report presented asbestos-related regulations that were to be conformed to during the conduct of the remedy implementation.

According to the remedial action report [Leidos 2015], security fences were installed around the perimeter of RQL in 2014 and eleven signs were installed around RQL to warn of the ACM hazard in the quarry bottom in compliance with OAC 3745-20-07(B)(1)(b). After installing the perimeter fence, ACM exposed at the ground surface was removed using non-intrusive, no digging methods (e.g., removal by hand) and dust control measures were implemented as needed to ensure no visible emissions. In total, an estimated 200 pounds of ACM was removed from the RQL.

The U.S. Army will manage future land use at RQL as restricted access due to residual, non-exposed asbestos in soil, residual PAH contamination above residential facility-wide cleanup goals, and the closed landfill. No soil disturbing activities are allowed within the quarry bottom and any personnel entering the quarry bottom will be briefed of the asbestos hazards. The Army will implement LUCs and conduct CERCLA five-year reviews. Other media (i.e., surface water, wet sediment, and groundwater) and MEC at RQL will be addressed as part of future actions.

There are no new standards or performance requirements affecting the protectiveness of the remedy at the RQL. A review of the risk assessment methods and toxicity criteria that prompted remedial action at RQL is located in Attachment 8.

CONCLUSION

There are no changes to the ARARs or newly promulgated or modified requirements of federal or state environmental laws that would change the protectiveness of the remedy implemented at RQL.

279 REFERENCES

280 Leidos (formerly SAIC) Engineering of Ohio, Inc. (Leidos) 2015. *Final Remedial Action Report*
281 *for Soil and Dry Sediment at RVAPP-01 Ramsdell Quarry Landfill, Ravenna Army Ammunition*
282 *Plant, Ravenna, Ohio, January.*

283 Leidos 2016. *Final PBA13 Sample and Analysis Plan Addendum for Surface Water and*
284 *Sediment at Load Lines 1, 2, 3, and 4, April.*

285 Leidos 2014. *Final Remedial Design for Soil and Dry Sediment at RVAPP-01 Ramsdell Quarry*
286 *Landfill, Ravenna Army Ammunition Plant, Ravenna, Ohio, April.*

287 MKM Engineers, Inc. (MKM) 2009. *Final Remedial Action Completion Report for RVAPP-05*
288 *Winklepeck Burning Grounds Pads 61/61A, 67, and 70, November.*

289 Prudent Technologies, Inc. (Prudent) 2013. *Field Characterization Sampling Report of Surface*
290 *and Subsurface Incremental Sampling Methodology at RVAAP-08, 09, 10, 11, and 12, Load*
291 *Lines 1, 2, 3, 4, and 12, March.*

292 Prudent 2011. *Field Sampling Report of Surface and Subsurface Incremental Sampling*
293 *Methodology at Load Lines 1, 2, 3, and 4 (RVAAP-08, 09, 10, and 11), March.*

294 SAIC Engineering of Ohio, Inc. (SAIC) 2013. *Final Record of Decision Amendment for Soil*
295 *and Dry Sediment at the RVAAP-01 Ramsdell Quarry Landfill, Ravenna Army Ammunition*
296 *Plant, Ravenna, Ohio, May.*

297 SAIC 2010. *Final Remedial Action Report for the RVAAP-12 Load Line 12, Ravenna Army*
298 *Ammunition Plant, Ravenna, Ohio, August.*

299 SAIC 2009a. *Final Record of Decision for Soil and Dry Sediment for the RVAAP-01 Ramsdell*
300 *Quarry Landfill, Ravenna Army Ammunition Plant, Ravenna, Ohio, March.*

301 SAIC 2009b. *Final Record of Decision for Soil and Dry Sediment for the RVAAP-12 Load Line*
302 *12, Ravenna Army Ammunition Plant, Ravenna, Ohio, March.*

303 SAIC 2006a. *Final Feasibility Study for Ramsdell Quarry Landfill (RVAAP-01), Ravenna Army*
304 *Ammunition Plant, Ravenna, Ohio, October.*

305 SAIC 2006b. *Final Feasibility Study for Load Line 12 (RVAAP-12), Ravenna Army Ammunition*
306 *Plant, Ravenna, Ohio, July.*

307 URS Group, Inc. (URS) 2010. *Final Remediation Completion Report, Sub-Slab Soils at RVAPP-*
308 *09 Load Line 2, RVAAP-10 Load Line 3, and RVAAP-11 Load Line 4, December.*

309 United States Army (Army) 2008. *Change Memorandum to the Interim Record of Decision for*
310 *the Remediation of Soils at Load Lines 1 through 4, January.*

311 United States Army Corps of Engineers Louisville District (USACE) 2015. *Final Explanation of*
312 *Significant Differences for Post-ROD Changes to the Remedy at RVAAP-05 Winklepeck Burning*

- 313 *Grounds, Former Ravenna Army Ammunition Plant/Camp Ravenna, Portage and Trumbull*
314 *Counties, Ohio, March.*
- 315 USACE 2008. Final Remedial Action Completion Report for the *Remediation of Soils and Dry*
316 *Sediments at RVAAP 08-11 (Load Lines 1-4), Ravenna Army Ammunition Plant, June.*
- 317 USACE 2007. *Interim Record of Decision for the Remediation of Soils at Load Lines 1 through*
318 *4 at the Ravenna Army Ammunition Plant, January.*

Appendix A

1. Attachment 1 of the Interim ROD for LLs 1-4 (USACE 2007)
2. Attachment A of the ROD for LL 12 (SAIC 2009b)
3. Table 4 of the ROD for WBG (SAIC 2008)
4. Table 4-1 of the Feasibility Study for RQL (SAIC 2006a)
5. Attachment A of the original ROD for RQL (SAIC 2009a)

Attachment 1. Description of ARARs

	Containers holding hazardous wastes must be kept closed except to add or remove wastes and must not be managed in a manner that would cause them to leak.	Applicable to 90-day accumulation of debris from excavation and screening if such debris contains listed wastes or exhibits a characteristic.	40 CFR 264.117 40 CFR 264.172 40 CFR 264.173 40 CFR 264.176 40 CFR 264.17 OAC 3745-52-34(A)(1)
	Containers of hazardous waste must be maintained in good condition and comparable with the waste stored therein. Containers holding ignitable or reactive wastes must be separated from potential ignition sources and located 50 feet from the property boundary.		
Placement of hazardous contaminated soil in a staging pile	<p>In 1998, USEPA created a new unit for the temporary management of remediation wastes known as the staging pile. The staging pile is an accumulation of solid, non-flowing remediation wastes that may be used for storage of those wastes for two years.</p> <p>The requirements for staging piles include the performance criteria of 40 CFR 264.554(d). These standards require that:</p> <p style="padding-left: 40px;">the staging pile must be designed to prevent or minimize releases of hazardous waste or hazardous constituents into the environment,</p> <p style="padding-left: 40px;">the staging pile must be designed to minimize cross-media transfer as necessary to protect human health and the environment (by using liners, run-off/run-on controls as appropriate)</p> <p>The staging pile requirements also contain closure requirements (separate provisions for staging piles located in previously contaminated areas and those located in previously uncontaminated areas)</p>	Applicable to storage of hazardous-contaminated soils in staging piles. Potentially relevant and appropriate if excavated soils are determined to not contain listed wastes or exhibit the TC soils.	40 CFR 264.554 OAC 3745-57-74

Attachment 1. Description of ARARs

	The generator must determine each EPA Hazardous Waste Number (Waste Code) to determine the applicable treatment standards under 40 CFR 268.40, Subpart D.	Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Applicable to generation of decontamination wastewater.	40 CFR 268.9(a) OAC 3745-270-07 OAC 3745-270-09
	The generator must determine the underlying hazardous constituents [as defined in 40 CFR 268.2(i)] in the waste.	Applicable to the generation and characterization of RCRA characteristic hazardous waste (except D001 non-wastewaters treated by combustion, recovery of organics, or polymerization. See 268.42, Table I) and to hazardous-contaminated soils for their subsequent storage, treatment, or disposal.	40 CFR 268.9(a) OAC 3745-270-09
Accumulation of Hazardous Debris from Excavation and Screening. It is Assumed that any Debris Resulting from Excavation and Screening will be Accumulated for ≤ 90 Days	<p>A generator may accumulate for up to 90 days or conduct treatment of hazardous wastes in containers without an Ohio EPA permit. Generators that accumulate for 90 days or conduct on-site treatment of hazardous waste in containers must comply with the personnel training, preparedness and prevention requirements, and contingency plan requirements of 40 CFR 265.16; 40 CFR 265, Subpart C; and 40 CFR 265, Subpart D, respectively.</p> <p>Personal training and contingency plan requirements would appear to be administrative in nature. Arguably some of the components/goals of the contingency plan such as: (1) to minimize the hazards to human health or environment from fire, explosion or sudden release of hazardous waste or hazardous constituents, or (2) presence of an emergency coordinator on site, could be viewed as substantive. If determined to be substantive, these provisions should be cited as ARAR; however, the plans, details or implementation steps should be included in the CERCLA documentation for the site (i.e., remedial design documents).</p>	Applicable to 90-day accumulation of debris from excavation and screening if such debris contains listed wastes or exhibits a characteristic.	40 CFR 262.34(a)(4) OAC 3745-52-34(A)(4) OAC 3745-66-70 to 66-77
	Containers must be marked with the date upon which period of accumulation began and with the words "Hazardous Waste."	Applicable to 90-day accumulation of debris from excavation and screening if such debris contains listed wastes or exhibits a characteristic.	40 CFR 262.34 (a)(2)(3) OAC 3745-52-34 (A)(2)(3)

Attachment 1. Description of ARARs

Construction Activities Causing Storm Water Runoff (e.g., clearing, grading, and excavation)	Construction activities disturbing more than 1 acre must develop and implement a storm water pollution prevention plan incorporating best management practices (including sediment and erosion controls, vegetative controls, and structural controls) in accordance with the requirements of the Ohio EPA General Permit for Construction Activities (Permit ORC 000002).	Applicable to stormwater discharges from land disturbances from a construction activity involving more than 1 acre.	40 CFR 122.26 OAC 3745-38-06
REMOVAL OF CONTAMINATED SOILS			
Waste Generation, Characterization, Segregation, and Storage-Excavated Soils and Buried Wastes, Sludge, Surface Features, Debris, and Secondary Wastes			
Generation and Characterization of Solid Waste (<i>all primary and secondary wastes</i>)	The generator must determine if the material is a solid waste, as defined in 40 CFR 261.2 and 40 CFR 261.4(a). if the material is a solid waste, the generator must determine if the solid waste is a hazardous waste by:	Applicable to generation of a solid waste as defined in 40 CFR 261.2 and that is not excluded under 40 CFR 261.4(a).	40 CFR 262.111(a)(b)(c) OAC 3745-52-111(A)(B)(C)(D)
	<ul style="list-style-type: none"> determining if the waste is listed under 40 CFR Part 261; or determining if the waste exhibits characteristics by using prescribed testing methods or applying generator knowledge based on information regarding material or processes used; and determining if the waste is excluded under 40 CFR Parts 261, 262, 266, 268, and 273 	<p>Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Process history indicates that soils were contaminated with K047 pink/red water from TNT operations.</p> <p>Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Site data indicate that soils contain metals at concentrations that exceed 20 times the TC limit and may exhibit the characteristics D008. Applicable to generation of decontamination wastewater.</p>	40 CFR 262.111(a)(b)(c) OAC 3745-52-111(A)(B)(C)(D) 40 CFR 262.111(a)(b)(c) OAC 3745-52-111(A)(B)(C)(D)
	The generator must determine if the waste is restricted from land disposal under 40 CFR 268 <i>et seq.</i> by testing in accordance with prescribed methods or use of generator knowledge of waste.	<p>Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation.</p> <p>Applicable to generation of decontamination wastewater.</p>	40 CFR 268.7 OAC 3745-270-07

Attachment 1. Description of ARARs

Action	Requirements	Prerequisite	Citation(s)
Surface Waters and Wetlands	All waters of the state shall be free of suspended solids, floating debris, oil, scum, or toxic substances from human activity that create a nuisance, cause degradation, or adversely affect aquatic life. There may be no degradation of water quality that results in violation of the applicable water quality criteria or the impairment of existing uses. Wetlands-designated uses shall be maintained and protected such that degradation through direct, indirect, or cumulative impacts do not result in wetland use or function.	Applicable to activities at LLs 1-4 that may impact waters of the state (connected drainageways) or wetlands, including isolated wetlands.	OAC 3745-1-04 OAC 3745-1-51 OAC 3745-1-54(B)(1)
General Construction Standards-Site Preparation and Excavation			
Activities Resulting in the Emission of Particulate Matter, Dusts, Fumes, Gas, Mists, Smoke, etc. From a Hazardous Waste Facility	No owner/operator of a hazardous waste facility shall cause or allow the emission of any particulate matter, dusts, gas, fumes, mists, smoke, vapor, or odorous substances that interferes with the enjoyment of life or property by persons living or working in the vicinity of the facility. Any such action is considered a public nuisance.	Applicable to soil excavation activities at LLs 1-4	ORC 3734.02(I) OAC 3745-15-07(A)
Activities Causing Fugitive Dust Emissions	Persons engaged in construction activities shall take reasonable precautions to prevent particulate matter from becoming airborne; reasonable precautions include, but are not limited to, the following: <ul style="list-style-type: none"> the use of water or chemicals for control of dust during construction operations or clearing of land; and the application of asphalt, oil, water, or suitable chemicals on dirt roads, materials stockpiles, and other surfaces, which can create airborne dusts. No person shall cause, or allow, fugitive dust to be emitted in such a manner that visible emissions are produced beyond the property line.	Applicable to fugitive emissions from demolition of existing buildings or structures, construction operations, grading of roads, or the clearing of land. Applicable to pre-construction clearing activities and excavation activities.	OAC 3745-17-08(B)

Attachment 1. Description of ARARs

Abbreviations:

CFR	Code of Federal Regulations
ORC	Ohio Revised Code
TC	toxicity characteristic

Potential Action ARARs for Disposal of RCRA Hazardous Waste

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
<p>Soil Contaminated with RCRA Hazardous Waste</p> <p>OAC § 3745-400-49 OAC § 3745-400-48 UTS</p>	<p>These rules prohibit land disposal of RCRA hazardous wastes subject to them, unless the waste is treated to meet certain standards that are protective of human health and the environment. Standards for treatment of hazardous contaminated soil prior to disposal are set forth in the two cited rules. Use of the greater of either technology-based standards or UTS is prescribed.</p>	<p>LDRs apply only to RCRA hazardous waste. This rule is considered for ARAR status only upon generation of a RCRA hazardous waste. If any soils are determined to be RCRA hazardous, and if they will be disposed of onsite, then this rule is potentially applicable to disposal of the soils.</p>	<p>All soils subject to treatment must be treated as follows:</p> <p>1) For non-metals, treatment must achieve 90% reduction in total constituent concentration (primary constituent for which the waste is characteristically hazardous as well as for any organic or metal UHC), subject to 3) below</p> <p>2) For metals and carbon disulfide, cyclohexanone, and methanol, treatment must achieve 90% reduction in constituent concentrations as measured in leachate from the treated media (tested according to the TCLP or 90% reduction in total constituent concentrations when a metal removal treatment technology is used), subject to 3) below.</p> <p>3) When treatment of any constituent subject to treatment to a 90% reduction standard would result in a concentration less than 10 times the UTS for that constituent, treatment to achieve constituent concentrations less than 10 times the UTS is not required. This is commonly referred to as "90% capped by 10xUTS."</p>
<p>Debris Contaminated with RCRA Hazardous Waste</p> <p>OAC § 3745-400-49 OAC § 3745-400-47</p>	<p>These rules prescribe conditions and standards for land disposal of debris contaminated with RCRA hazardous waste. Debris subject to this requirement for characteristic RCRA contamination that no longer exhibits the hazardous characteristic after treatment does not need to be disposed of as a hazardous waste. Debris contaminated with listed RCRA contamination remains subject to hazardous waste disposal requirements.</p>	<p>If RCRA hazardous debris is disposed of onsite, then these rules are potentially applicable to disposal of the debris.</p>	<p>Standards are extraction or destruction methods prescribed in OAC § 3745-400-47.</p> <p>Treatment residues continue to be subject to RCRA hazardous waste requirements.</p>
<p>Soils/Debris Contaminated with RCRA Hazardous Waste – Variance</p> <p>OAC § 3745-400-44</p>	<p>The Director will recognize a variance approved by the EPA from the alternative treatment standards for hazardous contaminated soil or for hazardous debris.</p>	<p>Potentially applicable to RCRA hazardous soil or debris that is generated and placed back into a unit and that will be land disposed of onsite.</p>	<p>A site-specific variance from the soil treatment standards can be used when treatment to concentrations of hazardous constituents greater (i.e., higher) than those specified in the soil treatment standards minimizes short- and long-term threats to human health and the environment. In this way, on a case-by-case basis, risk-based LDR treatment standards approved through a variance process could supersede the soil treatment standards.</p>

Potential Action ARARs for Disposal of RCRA Hazardous Waste (continued)

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
Soils Disposed of in a CAMU OAC § 3745-57-53	Only CAMU-eligible waste can be disposed of in a CAMU. CAMU-eligible waste includes hazardous and non-hazardous waste that are managed for implementing clean-up, depending on the Director's approval or prohibition of specific wastes or waste streams. Use of a CAMU for disposal does not trigger LDRs or MTRs as long as the standards specified in the rule are observed. The Director will incorporate design and treatment standards into a permit or order.	Potentially applicable to RCRA hazardous waste that is disposed of in a CAMU.	Design standards include a composite liner and a leachate collection system that is designed and constructed to maintain less than a 30 cm depth of leachate over the liner. A composite liner means a system consisting of two components; each of which has detailed specifications and installation requirements. The Director may approve alternate requirements if he can make the findings specified in the rule. Treatment standards are similar to LDR standards for contaminated soil, although alternative and adjusted standards may be approved or required by the Director, as long as the adjusted standard is protective of human health and the environment. Treatment standards are de facto clean-up standards for wastes disposed of in a CAMU.
Clean Water Act 33 USC § 1344 Sections 401, 404	Section 404 of the Clean Water Act of 1977 governs the discharge of dredged and fill material into waters of the U.S., including adjacent wetlands.	Potentially applicable if the main ditch at Load Line 12 is categorized as a jurisdictional wetland by the USACE Pittsburgh District. Section 401 water quality certification would apply regardless of jurisdictional status under Section 404. Ohio EPA addresses Section 401 certification through their Wetland Antidegradation Policy (See below).	The wetland in question is currently considered <u>jurisdictional</u> . However, USACE would have to make a <u>jurisdictional</u> determination regarding the wetland's status under Section 404 of the CWA. Both EPA and USACE have jurisdiction over wetlands. EPA's Section 404 guidelines are promulgated in 40 CFR § 230; USACE guidelines are promulgated in 33 CFR § 320.
Executive Order 11990 Protection of Wetlands	EO 11990 requires that federal agencies minimize the destruction, loss, or degradation of wetlands; preserve and enhance the natural and beneficial value of wetlands; and avoid support of new construction in wetlands if a practicable alternative exists.	Potentially applicable. Requires federal agencies to consider all alternatives to avoid or minimize activities with adverse impacts to wetlands.	EO 11990 requirements were addressed through the CERCLA evaluation of alternative actions for remediation.

Potential Action ARARs for Disposal of RCRA Hazardous Waste (continued)

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
Wetland Antidegradation OAC Section 3745-1-54	These rules prescribe the steps to categorize the existing wetland and outline the procedures for the antidegradation of wetlands.	Potentially applicable unless the main ditch is categorized as a jurisdictional wetland by the USACE Pittsburgh district. In which case the wetland would fall under requirement in the Clean Water Act for CERCLA wetlands.	The impact as a result of excavation in the main ditch would not result in significant degradation to the aquatic ecosystem - as determined consistent with 40 CFR part 230.10(2). The results of the action would result in better water quality. Ohio EPA could require mitigation for loss of wetland habitat.

ARAR = Applicable and Relevant or Appropriate Requirements.

CAMU = Corrective action management unit.

LDR = Land disposal restrictions.

MTR = Minimum Technical Requirements.

OAC = Ohio Administrative Code.

RCRA = Resource Conservation and Recovery Act.

TCLP = Toxicity Characteristic Leaching Procedure.

UHC = Underlying hazardous constituent.

UTS = Universal Treatment Standard.

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at Winklepeck Burning Grounds

Type of ARAR	Requirements	Prerequisite	Citation(s)
<i>Location-Specific</i>			
Surface Waters and Wetlands	All waters of the state shall be free of suspended solids, floating debris, oil, scum, or toxic substances from human activity that create a nuisance, cause degradation, or adversely affect aquatic life. There may be no degradation of water quality that results in violation of the applicable water quality criteria or the impairment of existing uses. Wetlands-designated uses shall be maintained and protected such that degradation through direct, indirect, or cumulative impacts do not result in wetland loss or function.	Applicable to activities at WBG that may impact waters of the state (connected drainageways) or wetlands, including isolated wetlands.	OAC 3745-1-04 OAC 3745-1-51 OAC 3745-1-54(B)(1)
<i>Action-Specific</i>			
Activities Causing Fugitive Dust Emissions	<p>Persons engaged in construction activities shall take reasonable precautions to prevent particulate matter from becoming airborne; reasonable precautions include, but are not limited to, the following:</p> <ul style="list-style-type: none"> – the use of water or chemicals for control of dust during construction operations or clearing of land; and – the application of asphalt, oil, water, or suitable chemicals on dirt roads, materials stockpiles, and other surfaces, which can create airborne dusts. <p>No person shall cause, or allow, fugitive dust to be emitted in such a manner that visible emissions are produced beyond the property line. Monitoring may be employed to determine the effectiveness of dust emission controls.</p>	Applicable to fugitive emissions from demolition of existing buildings or structures, construction operations, grading of roads, or the clearing of land. Applicable to pre-construction clearing activities and soil excavation activities.	OAC 3745-17-08(B)

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at for Winklepeck Burning Grounds (continued)

Type of ARAR	Requirements	Prerequisite	Citation(s)
Construction Activities Causing Storm Water Run-off (e.g., clearing, grading, and excavation)	Construction activities disturbing more than 1 acre must develop and implement a stormwater pollution prevention plan incorporating best management practices (including sediment and erosion controls, vegetative controls, and structural controls) in accordance with the requirements of the Ohio EPA General Permit for Construction Activities (Permit ORC 000002).	Applicable to stormwater discharges from land disturbances from a construction activity involving more than 1 acre.	40 <i>CFR</i> 122.26 OAC 3745-38-06
Generation and Characterization of Solid Waste (all primary and secondary wastes)	<p>The generator must determine if the material is a solid waste, as defined in 40 <i>CFR</i> 261.2 and 40 <i>CFR</i> 261.4(a). If the material is a solid waste, the generator must determine if the solid waste is a hazardous waste by:</p> <ul style="list-style-type: none"> determining if the waste is listed under 40 <i>CFR</i> Part 261; or determining if the waste exhibits characteristics by using prescribed testing methods or applying generator knowledge based on information regarding material or processes used; and determining if the waste is excluded under 40 <i>CFR</i> Parts 261, 262, 266, 268, and 273. 	Applicable to generation of a solid waste as defined in 40 <i>CFR</i> 261.2 and that is not excluded under 40 <i>CFR</i> 261.4(a).	40 <i>CFR</i> 262.11((a))((b))(c) OAC 3745-52-11(A)(B)(C)(D)
		Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Process history indicates that soil may have been contaminated with K047 (pink/red water) from RVAAP operations.	40 <i>CFR</i> 262.11((a))((b))(c) OAC 3745-52-11(A)(B)(C)(D)
		Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Site data indicate that soil contains metals at concentrations that exceed 20 times the toxicity characteristic limit and may exhibit the characteristics D008. Applicable to generation of decontamination wastewater.	
	The generator must determine if the waste is restricted from land disposal under 40 <i>CFR</i> 268 <i>et seq.</i> by testing in accordance with prescribed methods or use of generator knowledge of waste.	Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Applicable to generation of decontamination wastewater.	40 <i>CFR</i> 268.7 OAC 3745-270-07

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at for Winklepeck Burning Grounds (continued)

Type of ARAR	Requirements	Prerequisite	Citation(s)
	The generator must determine each EPA Hazardous Waste Number (Waste Code) to determine the applicable treatment standards under 40 <i>CFR</i> 268.40, Subpart D.	Applicable to the generation and characterization of hazardous-contaminated soil and hazardous debris resulting from excavation. Applicable to generation of decontamination wastewater.	40 <i>CFR</i> 268.9(a) OAC 3745-270-07 OAC 3745-270-09
	The generator must determine the underlying hazardous constituents [as defined in 40 <i>CFR</i> 268.2(i)] in the waste.	Applicable to the generation and characterization of RCRA characteristic hazardous waste (except D001 non-wastewaters treated by combustion, recovery of organics, or polymerization. see 268.42, Table I) and to hazardous-contaminated soil for their subsequent storage, treatment, or disposal.	40 <i>CFR</i> 268.9(a) OAC 3745-270-09
Accumulation of Hazardous Debris from Excavation and Screening (it is assumed that any debris resulting from excavation and screening will be accumulated for less than 90 days)	<p>A generator may accumulate for up to 90 days or conduct treatment of hazardous wastes in containers without an Ohio EPA permit. Generators that accumulate for 90 days or conduct on-site treatment of hazardous waste in containers must comply with the personnel training, preparedness and prevention requirements, and contingency plan requirements of 40 <i>CFR</i> 265.16; 40 <i>CFR</i> 265, Subpart C; and 40 <i>CFR</i> 265, Subpart D, respectively.</p> <p>Personal training and contingency plan requirements would appear to be administrative in nature. Arguably, some of the components/goals of the contingency plan such as: (1) to minimize the hazards to human health or environment from fire, explosion, or sudden release of hazardous waste or hazardous constituents; or (2) presence of an emergency coordinator on-site, could be viewed as substantive. If determined to be substantive, these provisions should be</p>	Applicable to 90-day accumulation of debris from excavation and screening if such debris contains listed wastes or exhibits a characteristic.	40 <i>CFR</i> 262.34(a)(4) OAC 3745-52-34(A)(4) OAC 3745-66-70 to 66-77

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at for Winklepeck Burning Grounds (continued)

Type of ARAR	Requirements	Prerequisite	Citation(s)
	cited as ARAR; however, the plans, details, or implementation steps should be included in the CERCLA documentation for the site (i.e., remedial design documents).		
	Containers must be marked with the date upon which period of accumulation began and with the words "Hazardous Waste."	Applicable to 90-day accumulation of debris from excavation and screening if such debris contains listed wastes or exhibits a characteristic.	40 CFR 262.34 (a)(2)(3) OAC 3745-52-34 (A)(2)(3)
	Containers holding hazardous wastes must be kept closed except to add or remove wastes and must not be managed in a manner that would cause them to leak. Containers of hazardous waste must be maintained in good condition and comparable with the waste stored therein. Containers holding ignitable or reactive wastes must be separated from potential ignition sources and located 50 ft from the property boundary.	Applicable to 90-day accumulation of debris from excavation and screening if such debris contains listed wastes or exhibits a characteristic.	40 CFR 264.171 40 CFR 264.172 40 CFR 264.173 40 CFR 264.176 40 CFR 264.17 OAC 3745-52-34(A)(1)
Placement of Hazardous-contaminated Soil in a Staging Pile	In 1988, EPA created a new unit for the temporary management of remediation waste known as a staging pile. The staging pile is an accumulation of solid, non-flowing remediation wastes that may be used for storage of those wastes for 2 years.	Applicable to storage of hazardous-contaminated soil in staging piles. Potentially relevant and appropriate if excavated soil are determined to not contain listed wastes or exhibit the toxicity characteristics of soil.	40 CFR 264.554 OAC 3745-57-74

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at for Winklepeck Burning Grounds (continued)

Type of ARAR	Requirements	Prerequisite	Citation(s)
	<p>The requirements for staging piles include the performance criteria of 40 <i>CFR</i> 264.554(d). These standards require that:</p> <ul style="list-style-type: none"> – the staging pile must be designed to prevent or minimize releases of hazardous waste or hazardous constituents into the environment, and – the staging pile must be designed to minimize cross-media transfer as necessary to protect human health and the environment (by using liners, run-off/run-on controls as appropriate). <p>The staging pile requirements also contain closure requirements (separate provisions for staging piles located in previously contaminated areas and those located in previously uncontaminated areas).</p>		
Generation and Storage of Wastewater from Equipment Decontamination (wastewater may contain listed wastes or exhibit a hazardous waste characteristic)	The generator must determine if the wastewater contains listed wastes or exhibits a characteristic, and must characterize the pollutants sufficiently to meet the waste acceptance criteria of the receiving facility. See previous requirements concerning the generation/characteristic of solid wastes.	Applicable to generation of wastewater from equipment decontamination.	40 <i>CFR</i> 262.111 OAC 3745-52-11 (A)(B)(C)(D)
Asbestos-Containing Materials at Pad 70 (worker training, material handling, containerization, transport and disposal)	<p>The management of Asbestos Containing Materials (ACM) is subject to the technical requirements found at 40 <i>CFR</i> 61.145 and OAC 3745-20. These standards require:</p> <ul style="list-style-type: none"> • That prior to the management of any asbestos material at least one trained person be present at all times that is trained in accordance with OAC3745-20-5. 	Applicable for asbestos-containing material generated from remedial actions at Pad 70.	40 <i>CFR</i> 61.145 OAC 3745-20

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at for Winklepeck Burning Grounds (continued)

Type of ARAR	Requirements	Prerequisite	Citation(s)
	<ul style="list-style-type: none"> • That no visible dust emissions occur during activities and that sufficient asbestos control measures (e.g., wetting, fixing, etc.) be included within the activities to prevent fugitive emissions of asbestos particles. • That asbestos wastes be controlled at all times (e.g., adequately wetted/fixed, work controls preclude the potential of rendering non-friable asbestos airborne, etc.). • The emission control measures be included within the planned actions and be approved prior to implementation. • Wastes be properly marked and disposed of at an approved facility. <p>The technical or substantive requirements will govern the manner in which ACM are removed, managed, packaged, and shipped for final disposal.</p>		

Table 4. ARARs for the Selected Alternative for Contaminated Soil and Dry Sediment at for Winklepeck Burning Grounds (continued)

ARAR = ~~Applicable~~ or relevant and appropriate requirement.

CERCLA = Comprehensive Environmental Response, Compensation, and Liability Act.

CFR = ~~Code of~~ Federal Regulations.

COC = Chemical of concern.

EPA = U. S. Environmental Protection Agency.

OAC = Ohio Administrative Code.

Ohio EPA = Ohio Environmental Protection Agency.

ORC = Ohio Revised Code.

PCB = Polychlorinated biphenyl.

RCRA = Resource Conservation and Recovery Act.

RVAAP = ~~Ravenna~~ Army Ammunition Plant.

TSCA = ~~Toxic~~ Substances Control Act.

WBG = Winklepeck Burning Grounds.

liner. A composite liner entails a system consisting of two components; each component has detailed specifications and installation requirements. The Director may approve alternate requirements if he can make the findings specified in the rule. Treatment standards are similar to LDR standards for contaminated soil, although alternative and adjusted standards may be approved or required by the Director, as long as the adjusted standard is protective of human health and the environment.

Table 4-1. Potential Action ARARs for Disposal of RCRA Hazardous Waste

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
Soil Contaminated with RCRA Hazardous Waste OAC Section 3745-400-49 OAC Section 3745-400-48 UTS	These rules prohibit land disposal of RCRA hazardous wastes subject to them, unless the waste is treated to meet certain standards that are protective of human health and the environment. Standards for treatment of hazardous contaminated soil prior to disposal are set forth in the two cited rules. Use of the greater of either technology-based standards or UTS is prescribed.	LDRs apply only to RCRA hazardous waste. This rule is considered for ARAR status only upon generation of a RCRA hazardous waste. If any soils are determined to be RCRA hazardous, and if they will be disposed of onsite, then this rule is potentially Applicable to disposal of the soils.	All soils subject to treatment must be treated as follows: 1) For non-metals, treatment must achieve 90% reduction in total constituent concentration (primary constituent for which the waste is characteristically hazardous as well as for any organic or metal UHC), subject to 3) below; 2) For metals and carbon disulfide, cyclohexanone, and methanol, treatment must achieve 90% reduction in constituent concentrations as measured in leachate from the treated media (tested according to the TCLP or 90% reduction in total constituent concentrations (when a metal removal treatment technology is used), subject to 3) below; 3) When treatment of any constituent subject to treatment to a 90% reduction standard would result in a concentration less than 10 times the UTS for that constituent, treatment to achieve constituent concentrations less than 10 times the UTS is not required. This is commonly referred to as "90% capped by 10xUTS."

Table 4-1. Potential Action ARARs for Disposal of RCRA Hazardous Waste (continued)

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
<p>Debris Contaminated with RCRA Hazardous Waste</p> <p>OAC Section 3745-400-49</p> <p>OAC Section 3745-400-47</p>	<p>These rules prescribe conditions and standards for land disposal of debris contaminated with RCRA hazardous waste. Debris subject to this requirement for characteristic RCRA contamination that no longer exhibits the hazardous characteristic after treatment does not need to be disposed of as a hazardous waste. Debris contaminated with listed RCRA contamination remains subject to hazardous waste disposal requirements.</p>	<p>If RCRA hazardous debris is disposed of onsite, then these rules are potentially applicable to disposal of the debris.</p>	<p>Standards are extraction or destruction methods prescribed in OAC Section 3745-400-47.</p> <p>Treatment residues continue to be subject to RCRA hazardous waste requirements.</p>
<p>Soils/Debris Contaminated with RCRA Hazardous Waste – Variance</p> <p>OAC Section 3745-400-44</p>	<p>The Director will recognize a variance approved by the USEPA from the alternative treatment standards for hazardous contaminated soil or for hazardous debris.</p>	<p>Potentially applicable to RCRA hazardous soil or debris that is generated and placed back into a unit and that will be land disposed of onsite.</p>	<p>A site-specific variance from the soil treatment standards can be used when treatment to concentrations of hazardous constituents greater (i.e., higher) than those specified in the soil treatment standards minimizes short- and long-term threats to human health and the environment. In this way, on a case-by-case basis, risk-based LDR treatment standards approved through a variance process could supersede the soil treatment standards.</p>
<p>Soils Disposed of in a CAMU</p> <p>OAC Section 3745-57-53</p>	<p>Only CAMU-eligible waste can be disposed of in a CAMU. CAMU-eligible waste includes hazardous and non-hazardous waste that are managed for implementing cleanup, depending on the Director's approval or prohibition of specific wastes or waste streams. Use of a CAMU for disposal does not trigger LDRs or MTRs as long as the standards specified in the rule are observed. The Director will incorporate design and treatment standards into a permit or order.</p>	<p>Potentially applicable to RCRA hazardous waste that is disposed of in a CAMU.</p>	<p>Design standards include a composite liner and a leachate collection system that is designed and constructed to maintain less than a thirty centimeter depth of leachate over the liner. A composite liner means a system consisting of two components; each of which has detailed specifications and installation requirements. The Director may approve alternate requirements if he can make the findings specified in the rule. Treatment standards are similar to LDR standards for contaminated soil, although alternative and adjusted standards may be approved or required by the Director, as long as the adjusted standard is protective of human health and the environment. Treatment standards are de facto cleanup standards for wastes disposed of in a CAMU.</p>

ARAR = ~~Applicable~~ and relevant or appropriate requirements.

CAMU = Corrective Action Management Unit.

LDR = Land Disposal Restrictions.

MTR = Minimum technical requirements.

OAC = ~~Ohio~~ Administrative Code.

RCRA = Resource Conservation and Recovery Act.

TCLP = Toxicity characteristic leaching procedure.

UHC = ~~Underlying~~ Hazardous Constituent.

UTS = Universal Treatment Standard.

Potential Action ARARs for Disposal of RCRA Hazardous Waste

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
<p>Soil Contaminated with RCRA Hazardous Waste</p> <p>OAC Section 3745-400-49 OAC Section 3745-400-48 UTS</p>	<p>These rules prohibit land disposal of RCRA hazardous wastes subject to them, unless the waste is treated to meet certain standards that are protective of human health and the environment. Standards for treatment of hazardous contaminated soil prior to disposal are set forth in the two cited rules. Use of the greater of either technology-based standards or UTS is prescribed.</p>	<p>LDRs apply only to RCRA hazardous waste. This rule is considered for ARAR status only upon generation of a RCRA hazardous waste. If any soils are determined to be RCRA hazardous, and if they will be disposed of onsite, then this rule is potentially Applicable to disposal of the soils.</p>	<p>All soils subject to treatment must be treated as follows:</p> <ol style="list-style-type: none"> 1) For non-metals, treatment must achieve 90% reduction in total constituent concentration (primary constituent for which the waste is characteristically hazardous as well as for any organic or metal UHC), subject to 3) below; 2) For metals and carbon disulfide, cyclohexanone, and methanol, treatment must achieve 90% reduction in constituent concentrations as measured in leachate from the treated media (tested according to the TCLP or 90% reduction in total constituent concentrations (when a metal removal treatment technology is used), subject to 3) below; 3) When treatment of any constituent subject to treatment to a 90% reduction standard would result in a concentration less than 10 times the UTS for that constituent, treatment to achieve constituent concentrations less than 10 times the UTS is not required. This is commonly referred to as "90% capped by 10xUTS."
<p>Debris Contaminated with RCRA Hazardous Waste</p> <p>OAC Section 3745-400-49 OAC Section 3745-400-47</p>	<p>These rules prescribe conditions and standards for land disposal of debris contaminated with RCRA hazardous waste. Debris subject to this requirement for characteristic RCRA contamination that no longer exhibits the hazardous characteristic after treatment does not need to be disposed of as a hazardous waste. Debris contaminated with listed RCRA contamination remains subject to hazardous waste disposal requirements.</p>	<p>If RCRA hazardous debris is disposed of onsite, then these rules are potentially applicable to disposal of the debris.</p>	<p>Standards are extraction or destruction methods prescribed in OAC Section 3745-400-47.</p> <p>Treatment residues continue to be subject to RCRA hazardous waste requirements.</p>

Potential Action ARARs for Disposal of RCRA Hazardous Waste (continued)

Media and Citation	Description of Requirement	Potential ARAR Status	Standard
<p>Soils/Debris Contaminated with RCRA Hazardous Waste – Variance</p> <p>OAC Section 3745-400-44</p>	<p>The Director will recognize a variance approved by the USEPA from the alternative treatment standards for hazardous contaminated soil or for hazardous debris.</p>	<p>Potentially applicable to RCRA hazardous soil or debris that is generated and placed back into a unit and that will be land disposed of onsite.</p>	<p>A site-specific variance from the soil treatment standards can be used when treatment to concentrations of hazardous constituents greater (i.e., higher) than those specified in the soil treatment standards minimizes short- and long-term threats to human health and the environment. In this way, on a case-by-case basis, risk-based LDR treatment standards approved through a variance process could supersede the soil treatment standards.</p>
<p>Soils Disposed of in a CAMU</p> <p>OAC Section 3745-57-53</p>	<p>Only CAMU-eligible waste can be disposed of in a CAMU. CAMU-eligible waste includes hazardous and non-hazardous waste that are managed for implementing clean-up, depending on the Director's approval or prohibition of specific wastes or waste streams. Use of a CAMU for disposal does not trigger LDRs or MTRs as long as the standards specified in the rule are observed. The Director will incorporate design and treatment standards into a permit or order.</p>	<p>Potentially applicable to RCRA hazardous waste that is disposed of in a CAMU.</p>	<p>Design standards include a composite liner and a leachate collection system that is designed and constructed to maintain less than a thirty centimeter depth of leachate over the liner. A composite liner means a system consisting of two components; each of which has detailed specifications and installation requirements. The Director may approve alternate requirements if he can make the findings specified in the rule. Treatment standards are similar to LDR standards for contaminated soil, although alternative and adjusted standards may be approved or required by the Director, as long as the adjusted standard is protective of human health and the environment.</p> <p>Treatment standards are de facto clean-up standards for wastes disposed of in a CAMU.</p>

Clean Water Act 33 USC § 1344 Sections 401, 404	Section 404 of the Clean Water Act of 1977 governs the discharge of dredged and fill material into waters of the U.S., including adjacent wetlands.	Potentially applicable if the Ramsdell Quarry wetland is categorized as a jurisdictional wetland by the USACE Pittsburgh District. Section 401 water quality certification would apply regardless of jurisdictional status under Section 404. Ohio EPA addresses Section 401 certification through their Wetland Antidegradation Policy (See below).	The wetland in question is hydrologically isolated and incidentally created. It has no direct surface water connections to any waters of the U. S. The USACE would have to make a jurisdictional determination regarding the wetland's status under Section 404 of the CWA. Both EPA and USACE have jurisdiction over wetlands. EPA's Section 404 guidelines are promulgated in 40 CFR § 230; USACE guidelines are promulgated in 33 CFR § 320.
Executive Order 11990 Protection of Wetlands	EO 11990 requires that federal agencies minimize the destruction, loss, or degradation of wetlands; preserve and enhance the natural and beneficial value of wetlands,; and avoid support of new construction in wetlands if a practicable alternative exists.	Potentially applicable. Requires federal agencies to consider all alternatives to avoid or minimize activities with adverse impacts to wetlands.	EO 11990 requirements were addressed through the CERCLA evaluation of alternative actions for remediation.
Wetland Antidegradation OAC Section 3745-1-54	These rules prescribe the steps to categorize the existing wetland and outline the procedures for the antidegradation of wetlands.	Potentially applicable unless other wise categorized as a jurisdictional wetland by the USACE Pittsburgh district. In which case the wetland would fall under requirement in the Clean Water Act for CERCLA wetlands.	The wetland in question was rated as a Category 1 through the ORAM as prescribed by Ohio EPA. A category 1 wetland generally supports minimal wildlife habitat, hydrologic, and recreational functions. The impact as a result of excavation would not result in significant degradation to the aquatic ecosystem - as determined consistent with 40 CFR part 230.10(2). The results of the action would result in better water quality. Ohio EPA could require mitigation for loss of wetland habitat.

ARAR = ~~A~~pplicable and relevant or appropriate requirements.

CAMU = Corrective Action Management Unit.

LDR = Land Disposal Restrictions.

MT~~R~~ = Minimum technical requirements.

OAC = Ohio Administrative Code.

RCRA = Resource Conservation and Recovery Act.

TCLP = Toxicity characteristic leaching procedure.

UHC = ~~U~~nderlying Hazardous Constituent.

UTS = ~~U~~niversal Treatment Standard.

ATTACHMENT 8
Risk Assessment and Toxicology Evaluation

Risk Assessment and Toxicology Evaluation

This evaluation was prepared to address Question B of the statement of service, “*Are the exposure assumptions, toxicity data, cleanup levels and remedial action objectives (RAOs) used at the time of the remedy selection still valid?*”

This is the second five-year review for Camp Ravenna. The following areas of concern (AOCs) are being evaluated.

- Load Line 1
- Load Line 2
- Load Line 3
- Load Line 4
- Load Line 12
- Winklepeck Burning Grounds (WBG)
- Ramsdell Quarry Landfill (RQL)

Since many of these areas have the same constituents of concern (COCs) and a review of toxicity criteria changes was performed altogether. Table A.8-1 indicates that toxicity criteria changes may have occurred for some COCs since their original records of decision (RODs) were signed (e.g., for Load Lines 1 – 4, Load Line 12, and RQL), however, no new toxicity criteria changes have occurred since the last five-year review was completed in 2012 (USACE-LRB 2012).

Therefore, the conclusions from the previous five-year review regarding continued protectiveness of existing toxicity criteria used at the time of the remedy remain valid for this report. Since that time, an updated risk assessment was performed for WBG in 2014 as part of a remedial investigation/feasibility study (RI/FS) supplement (USACE-LRL 2014). This supported a 2015 Explanation of Significant Differences (ESD) for WBG (USACE-LRL 2015).

In 2010, facility-wide risk-based cleanup goals were developed (SAIC 2010) to assist in streamlining the site-specific human health risk assessment process following investigation of potentially contaminated site media. In 2012, USACE issued a position paper outlining the application and use of these facility-wide cleanup goals, which indicated that site-specific cleanup goals for residential or military training should be used in the streamlined risk evaluation process (USACE-LRL 2012). In 2014 the Army National Guard (ARNG) issued a final technical memorandum regarding land uses and revised risk assessment process for the Ravenna Army Ammunition Plant (ARNG 2014), which indicated that in addition to the site-specific exposure assessments described in the 2012 position paper, the USEPA’s regional risk-based screening levels (RSLs) for industrial use should also be used in the risk evaluations (currently USEPA 2016a). The three land uses and representative receptors identified in that technical memorandum are (a) unrestricted (residential) land use, represented by a resident receptor (adult and child), (b) military training land use, represented by a National Guard Trainee, and (c) commercial/industrial use, represented by an industrial receptor as used in the development of USEPA regional generic risk-based screening levels for the composite worker. Note that a comparison between the current USEPA industrial use RSLs and the previously developed site-specific cleanup goals (for the areas covered by this review, or the facility-wide cleanup goals) indicates that the USEPA industrial RSLs may not be protective of the assumed site-specific exposures (the National Guard Trainee) for certain constituents of concern. This is shown in Table A.8-2; site-specific cleanup goals developed to protect a National Guard Trainee in the

Load Lines 1 – 4 Interim ROD for aluminum, barium, hexavalent chromium, manganese are lower than the current USEPA industrial use RSLs, as are cleanup goals developed in the RQL for manganese and polycyclic aromatic hydrocarbons (semi-volatiles). The 2010 facility-wide cleanup goal for Aroclor-1254 is lower than the current USEPA industrial use risk-based screening level. This issue does not currently affect protectiveness, since the cleanup goals established in the decision documents and the ESD remain protective of current exposure and the USEPA industrial use risk-based cleanup goals are not being implemented as site-specific cleanup goals at Load Lines 1 – 4 or RQL at this time.

Area-specific considerations for risk assessment are provided for each area below.

Load Lines 1 - 4

Human Health

Site-specific risk-based cleanup goals were developed for load lines 1 – 4 based on protection of the current and reasonably anticipated future use of these areas of the site as a National Guard training site. These are presented in Table 3 of the 2007 Interim Record of Decision (ROD) for load lines 1 – 4. A National Guard Trainee was identified as the reasonable maximum exposed individual for load lines 1 – 4, following the same basic exposure assessment. This receptor was assumed to train at the site 24 hours per day for 24 days per year for inactive duty training and 24 hours per day for 15 days per year for annual training for their 25 year enlistment period.

Conservative estimates were made of how much contaminated soil and sediment this person would encounter via incidental ingestion, inhalation of dust particles, and skin contact. The USEPA's currently recommended default exposure factor values (USEPA 2014) are generally less conservative than what was used in the site-specific risk assessment and the exposure assessments used at the time of the risk assessments for these areas remains valid. The cleanup goals were designed to be fully protective of all trainee activities with the sites, assuming that the trainee would be exposed to surface soil, which was defined as the top four feet. Remediation was limited to the top four feet of soil. The intention of the original exposure assessment supporting development of these cleanup goals was to allow the trainee to move about the site on foot or in a vehicle with unlimited exposure to surface soil. The only restrictions would be to exposure to soils deeper than four feet. This was intended to be consistent with anticipated military uses of the site.

Although the reasonable future land use remains the same the Ohio Army National Guard (OHARNG) must adhere to the digging and vehicle cleaning restrictions implied by the exposure assessment defined in the Interim ROD for load lines 1 - 4. Specifically, all site visitors and site users should be monitored to ensure that their actual exposure time does not exceed the exposure time assumed for development of cleanup goals. In addition, vehicles traversing from one load line area to another should be cleaned between areas, to ensure that dirt is not being dug up and dragged across sites. This can be cumbersome and interferes with OHARNG planned training activities at the site.

Load lines 1 – 4 are not currently being used for OHARNG training, although that is their intended land use. The site inspection did not identify evidence of trespass or OHARNG training in these areas.

Subsequent to the remedy implementation (removal of all soils containing contamination above cleanup goals established in the ROD), additional characterization (sampling and analysis) was

performed to evaluate the presence and extent of contamination in the surface and subsurface soils and surface water and sediment at Load Lines 1 - 4 (Leidos 2015, Leidos 2016). The objective of this characterization was to determine if the areas may meet unrestricted (residential) land use requirements, or, if additional remediation may be appropriate in order for the areas to meet those requirements. The sediment and surface water sampling data will also be evaluated for potential effects on ecological receptors which may be exposed to those media. A FS addendum is currently being drafted to determine whether additional soil cleanup may be warranted in order to remove restrictions on use of the sites by OHARNG.

As indicated earlier (Table A.8-1), no additional toxicity changes have occurred for any of the COCs in the ROD since the last five-year review was conducted. As no actual exposures are occurring at the sites, the cleanup goals specified in the Interim ROD remain protective.

Environmental Health

The conclusions from evaluating the ecological risk assessment and current conditions of the site for media covered by the 2007 Interim ROD (soil and dry sediment) at the time of the previous five-year review are still valid and are repeated here. (Note: the draft report evaluating potential ecological effects from exposure to any site contaminants in surface water and sediment was not available at the time this review was prepared).

Because the majority of constituents of ecological concern are co-located with human health COCs, remedial activities implemented to address human health COCs will serve to reduce the concentrations and number of constituents of ecological concern in soil to which ecological receptors are exposed, resulting in lowered ecological risk. Based on the expected impact to site conditions at load lines 1-4 from remediation associated with achieving human health cleanup goals and proposed vehicular training activities (e.g., soil compaction, vegetation damage, etc.), ecologically based cleanup goals have been determined to be unnecessary (USACE 2007). Since the load lines 1-4 and Load Line 12 will not be managed for ecological purposes but instead will have intensive use by the OHARNG, protection of human health will drive the RAOs and the remedy would adequately protect the environment. The Integrated Natural Resource Management Plan for the site (OHARNG 2007) stipulates that the site will be managed to provide for sustainable, healthy ecosystems and comply with applicable environmental laws and regulations. As such, the remedy allowing for OHARNG use of the site would continue to provide adequate protection for the environment.

Significant Finding

The exposure assumptions, toxicity data, cleanup levels and RAOs used at the time of the remedy selection are still valid. The USEPA's current recommended default exposure factor values are generally less conservative than what was used to initially assess risk and develop site-specific cleanup goals, so the basis of the exposure assessment remains protective. No exposures are currently occurring at the site. No new toxicity criteria changes have occurred in the past five years that would affect the protectiveness of the cleanup goals.

RVAAP-12, Load Line 12

Human Health

A site-specific risk-based cleanup goal for arsenic in soil and dry sediment was developed for Load Line 12 based on protection of the current and reasonably anticipated future use of this area of the site as a National Guard Training site. This is presented in Table 1 of the 2009 ROD. A

National Guard Trainee was identified as the reasonable maximum exposed individual for Load Line 12, following the same basic exposure assessment described above for load lines 1 - 4. This receptor was assumed to train at the site 24 hours per day for 24 days per year for inactive duty training and 24 hours per day for 15 days per year for annual training for their 25 year enlistment period. Conservative estimates were made of how much contaminated soil and sediment this person would encounter via incidental ingestion, inhalation of dust particles, and skin contact. The USEPA's currently recommended default exposure factor values (USEPA 2014) are generally less conservative than what was used in the site-specific risk assessment, therefore, the exposure assessments used at the time of the risk assessments for this area remains valid. The cleanup goals were designed to be fully protective of all trainee activities with the site, assuming that the trainee would be exposed to surface soil, which was defined as the top four feet of soil. Remediation was limited to the top four feet of soil. The intention of the original exposure assessment supporting development of these cleanup goals was to allow the trainee to move about the site on foot or in a vehicle with unlimited exposure to surface soil. The only restrictions would be to exposure to soils deeper than four feet. This was intended to be consistent with anticipated military uses of the site.

Although the reasonable future land use remains the same (it is intended to be used by the OHARNG), the OHARNG must adhere to the digging and vehicle cleaning restrictions implied by the exposure assessment defined in the 2009 ROD for Load Line 12. Specifically, all site visitors and site users should be monitored to ensure that their actual exposure time does not exceed the exposure time assumed for development of cleanup goals. In addition, vehicles traversing from one load line area to another should be cleaned between areas, to ensure that dirt is not being dug up and dragged across sites. This can be cumbersome and interferes with OHARNG planned training activities at the site.

Load Line 12 is not currently being used for OHARNG training, although that is its intended land use. The site inspection did not identify evidence of trespass or OHARNG training in these areas. Subsequent to the remedy implementation (removal of all soils containing contamination above cleanup goals established in the ROD), additional characterization (sampling and analysis) was performed to evaluate the presence and extent of contamination in the surface and subsurface soils (Leidos 2015) and in wet sediment and surface water at the site (SAIC 2012). A FS addendum is currently being drafted to determine whether additional cleanup may be warranted in order to remove restrictions on use of the site by OHARNG.

As indicated earlier (Table A.8-1), no additional toxicity changes have occurred for any of the COCs in the ROD since the last five-year review was conducted. As no actual exposures are occurring at the sites, the cleanup goals specified in the ROD remain protective.

In 2012, a Phase III RI report was drafted, which characterized the nature and extent of constituents of potential concern in wet sediment and surface water at Load Line 12 (SAIC 2012). That report concluded that there are no COCs that pose unacceptable risk in these media at this site. Groundwater is being evaluated separately as an area of concern for the entire facility under RVAAP-66.

Environmental Health

The conclusions from evaluating the ecological risk assessment and current conditions of the site at the time of the previous five-year review are still valid.

Because the majority of constituents of ecological concern are co-located with human health COCs, remedial activities implemented to address human health COCs will serve to reduce the concentrations and number of constituents of ecological concern in soil to which ecological receptors are exposed, resulting in lowered ecological risk. Based on the expected impact to site conditions at Load Line 12 from remediation associated with achieving human health cleanup goals and proposed vehicular training activities (e.g., soil compaction, vegetation damage, etc.), ecologically based cleanup goals have been determined to be unnecessary (USACE 2007). Since Load Line 12 will not be managed for ecological purposes but instead will have intensive use by the OHARNG, protection of human health will drive the RAOs and the remedy would provide adequate protection of the environment. The Integrated Natural Resource Management Plan for the site (OHARNG 2007) stipulates that the site will be managed to provide for sustainable, healthy ecosystems and comply with applicable environmental laws and regulations. As such, the remedy allowing for OHARNG use of the site would continue to provide adequate protection for the environment. Furthermore, the Phase III RI of wet sediment and surface water considered the presence of wetlands and perennial surface water in channelized ditches/streams and ponds at the site as important and significant ecological resources near potential contamination being investigated in the area of concern. The Phase III RI also concluded that no further action was warranted to protect ecological receptors in this area.

Significant Finding

The exposure assumptions, toxicity data, cleanup levels and RAOs used at the time of the remedy selection for dry soil and sediment are still valid. No exposures are currently occurring at the site. The USEPA's current recommended default exposure factor values are generally less conservative than what was used to initially assess risk and develop site-specific cleanup goals, so the basis of the exposure assessment used to develop cleanup goals for the site remains protective. No new toxicity criteria changes have occurred in the past five years that would affect the protectiveness of the cleanup goals. Additional characterization of wet sediment and surface water indicated that there are no COCs that pose unacceptable risk to human health and the environment in these media at this site, therefore, there is no new evidence of any contamination which would call into question the protectiveness of the remedy.

Ramsdell Quarry Landfill

Human Health

In 2009, a ROD was signed indicating that soil excavation was needed to protect security guard and maintenance worker receptors who might be exposed to site media. The previous five year review indicated that those cleanup goals remained valid and protective, however, unanticipated conditions (presence of asbestos) were encountered during implementation of the remedy, which prevented full implementation of the remedy. In 2013, a ROD amendment was signed which selected a new remedy that consisted of installing a security fence with signage around the perimeter of RQL and removal of asbestos containing material at the ground surface within the quarry bottom (SAIC 2015). RQL would be closed to all standard training activities and the fence would help enforce those restrictions. As stated in the ROD amendment:

“Surveying; sampling; and essential security, safety, periodic maintenance, natural resources management, and other directed activities may be conducted at RQL only after personnel have been properly briefed on potential hazards. A portion of RQL is also considered an MRS, designated RVAAP-0001-R-01.

Investigation and decisions regarding the need for remediation of munitions and explosives of concern (MEC) and munitions debris (MD) will be conducted as part of the Military Munitions Response Program (MMRP). Individuals will be granted access to the AOC after being properly briefed on the hazards/restrictions. Once the fence is complete and LUCs are in place, this alternative will result in reduced potential for exposure to contaminated soil by National Guard receptors. This alternative will also protect the MRS and landfill cap on the closed, sanitary landfill within RQL.”

According to the 2015 Annual Land Use Control Monitoring Report (Vista 2016), the fence and signage has been installed and are in good shape.

Significant Finding

The remedial action objectives identified in the 2013 ROD amendment were established to eliminate exposure to site contaminants. Fencing was installed and training activities are not allowed on this area of the site. The RAOs used at the time of remedy selection are still valid and functioning to eliminate the exposure that could lead to unacceptable risks.

Winklepeck Burning Grounds

Human Health

A ROD was initially signed in 2008 indicating cleanup was to be performed to allow use of the site as a Mark 19 Grenade Machine Gun range by a National Guard Maintenance Soldier. It is currently being used for this purpose.

In 2015, an ESD was developed for WBG (USACE-LRL 2015) following a draft RI/FS supplement that was conducted after the initial ROD remedial action. These actions were taken to remove restrictions associated with the previous remedial action. The site is planned to be further developed as a Multi-Purpose Machine Gun range, which will require intrusive activities at various depths over the entire AOC. Additionally, the U.S. Army determined that future use of the site may involve full-time employees, thereby requiring that it meet the applicable standards for commercial/industrial land use. The draft RI/FS supplement indicates that the AOC has three COCs related to commercial/industrial land use (USACE-LRL 2014). Although the ESD does not list the three COCs or their associated commercial/industrial cleanup goals, a review of the RI/FS Supplement indicates that TNT, RDX, and benzo(a)pyrene were identified as exceeding the commercial/industrial RSLs. Table A.8-2 includes the USEPA commercial/industrial RSLs for these constituents that were identified at the time of the supplemental RI/FS. The USEPA RSLs are updated every six months; it appears that values from the May 2013 version of the USEPA RSL table were used, consistent with the date of the Final Risk Assessment Assumptions Document (USACE-LRL 2013). Tables A.8-1 and A.8-2, indicate that although no recent changes in toxicity criteria have occurred for these three COCs, the current USEPA RSLs for industrial use are now greater than (less conservative than) the industrial USEPA RSLs used at the time of the RI/FS supplement. This is due to slight updates to various exposure factor values that USEPA uses to develop the RSLs, which are generally less conservative than previous default exposure factor values (USEPA 2014). In addition, chemical and physical parameter values may have been slightly updated, and those will affect the dermal and inhalation exposure pathways. However, none of these newer exposure assessment recommendations from the USEPA affect the protectiveness of the remedy.

Environmental Health

As stated in the first five-year review (2012), the determination of ecological risk was made by using field biological measurements at the site. This provides a significant advantage over a screening level ecological risk assessment, which tends to rely on laboratory-based toxicity evaluations and the use of laboratory test subjects rather than wildlife. As such, the site-specific observations and measurements made during the field studies would take precedence over any changes in toxicity criteria developed in the laboratory. Since the WBG will not be managed for ecological purposes and instead will have intensive use by the OHARNG, protection of human health drives the remedial action objectives (RAOs) and the remedy would provide adequate protection of the environment.

The Integrated Natural Resource Management Plan for the site (OHARNG 2007) stipulates that the site will be managed to provide for sustainable, healthy ecosystems and comply with applicable environmental laws and regulations. As such, the remedy allowing for OHARNG use of the site would continue to provide adequate protection for the environment.

Significant Finding

The exposure assumptions, toxicity data, cleanup levels, and RAOs used at the time of the remedy selection (2009 ROD) are still valid. The additional cleanup identified in the 2015 ESD remains valid as there have been no changes in recommended exposure factor values or toxicity values that would affect the protectiveness of using the USEPA commercial/industrial RSLs in place at that time (circa 2013) as cleanup goals.

References

Army National Guard Bureau (ARNG) 2014. Final Technical Memorandum for Nancy Zikmanis Environmental Supervisor, Ohio Environmental Protection Agency Northeast District Office: Land Uses and Revised Risk Assessment Process for the Ravenna Army Ammunition Plant (RVAAP) Installation Program, Portage/Trumbull Counties, Ohio.

Leidos 2015. Draft. PBA13 Remedial Investigation Sample and Analysis Plan Addendum for Load Lines 1, 2, 3, 4 and 12. Ravenna Army Ammunition Plant, Ravenna, Ohio. Prepared for the USACE Louisville District.

Leidos 2016. Final. PBA13 Remedial Investigation Sample and Analysis Plan Addendum for Surface Water and Sediment at Load Lines 1, 2, 3, 4. Ravenna Army Ammunition Plant, Ravenna, Ohio. Prepared for the USACE Louisville District.

Sciences Applications International Corporation (SAIC) 2010. Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio.

SAIC 2012. Draft Phase III Remedial Investigation Report for Wet Sediment and Surface Water at RVAAP-12 Load Line 12. Ravenna Army Ammunition Plant, Ravenna, Ohio. Prepared for the USACE Louisville District.

SAIC 2015. Final Record of Decision Amendment for Soil and Dry Sediment at the RVAAP-01 Ramsdell Quarry Landfill. Ravenna Army Ammunition Plant, Ravenna, Ohio. Prepared for the USACE Louisville District.

U.S. Army Corps of Engineers Buffalo District Office (USACE-LRB) 2012. Final First Installation-Wide Five-Year Review Report for RVAAP-01 Ramsdell Quarry Landfill, RVAAP-

301 05 Winklepeck Burning Grounds, RVAAP-08 Load Line 1, RVAAP-09 Load Line 2, RVAAP-
302 10 Load Line 3, RVAAP-11 Load Line 4, RVAAP-12 Load Line 12 Ravenna Army
303 Ammunition Plant, Ravenna Ohio, Prepared for U. S. Army Base Realignment and Closure
304 Division Army National Guard, Ohio Army National Guard

305 U.S. Army Corps of Engineers Louisville District Office (USACE-LRL) 2012. Position Paper
306 for the Application and Use of Facility-Wide Human Health Cleanup Goals.

307 USACE-LRL. Final Risk Assessment Assumptions Document (RAAD): Addendum to the Work
308 Plan for the Additional Evaluation of the RVAAP-05 Winklepeck Burning Grounds,
309 RVAAP/Camp Ravenna, Ohio

310 USACE-LRL 2014. Draft Remedial Investigation / Feasibility Study Supplement for RVAAP-
311 05 Winklepeck Burning Grounds, Former Ravenna Army Ammunition Plant / Camp Ravenna,
312 Portage and Trumbull Counties, Ohio. Prepared for RVAAP/Camp Ravenna

313 USACE-LRL 2015. Final Explanation of Significant Differences for Post-ROD Changes to the
314 Remedy at RVAAP-05 Winklepeck Burning Grounds, Former Ravenna Army Ammunition
315 Plant / Camp Ravenna, Portage and Trumbull Counties, Ohio. Prepared for National Guard
316 Bureau.

317 U.S. Environmental Protection Agency (USEPA) 1990. National Oil and Hazardous Substances
318 Pollution Contingency Plan, Final Rule, FR Vol. 55, No. 46, March 8, 1990, available from U.S.
319 Government Printing Office, Washington, D.C

320 USEPA 2003. Human Health Toxicity Values in Superfund Risk Assessments. OSWER
321 Directive 9285.7-53. December.

322 USEPA 2004, Risk Assessment Guidance for Superfund, Volume I, Human Health Evaluation
323 Manual (Part E, Supplemental Guidance for Dermal Risk Assessment), Final,
324 EPA/540/R/99/005, OSWER 9285.7-02EP, Office of Solid Waste and Emergency Response,
325 Washington, DC (including 2007 updates on-line);
326 <http://www.epa.gov/oswer/riskassessment/ragse/index.htm>

327 USEPA 2009, Risk Assessment Guidance for Superfund (RAGS), Volume I: Human Health
328 Evaluation Manual (Part F, Supplemental Guidance for Inhalation Risk Assessment), EPA-540-
329 R-070-002 (January), <http://www.epa.gov/oswer/riskassessment/ragsf/>

330 USEPA 2014. Human Health Evaluation Manual, Supplemental Guidance: Update of Standard
331 Default Exposure Factors. OSWER Directive 9200.1-120.
332 [http://www.epa.gov/oswer/riskassessment/pdf/superfund-hh-exposure/OSWER-Directive-9200-
333 1-120-ExposureFactors.pdf](http://www.epa.gov/oswer/riskassessment/pdf/superfund-hh-exposure/OSWER-Directive-9200-1-120-ExposureFactors.pdf)

334 USEPA 2015a, Assessment of Mitigation Systems on Vapor Intrusion: Temporal Trends,
335 Attenuation Factors, and Contaminant Migration Routes under Mitigated And Non-mitigated
336 Conditions. EPA/600-R-13-241.

337 USEPA June 2015b. OSWER Technical Guidance for Assessing and Mitigating the Vapor
338 Intrusion Pathway from Subsurface Vapor Sources to Indoor Air. OSWER Publication 9200.2-
339 154.

340 USEPA 2016a, Regional Screening Levels (RSL) Summary Table, May 2016 (table last
341 updated); available via EPA Region web sites, e.g.,

342 <https://www.epa.gov/risk/regional-screening-levels-rsls>
343 USEPA 2016b, Integrated Risk Information System (IRIS), National Center for Environmental
344 Assessments. <http://www.epa.gov/iris/>
345 USEPA 2016, OSWER Vapor Intrusion Assessment VISL Calculator Version 3.5.1, June 2016,
346 <http://www.epa.gov/vaporintrusion>
347 USEPA Region X. December 2012. Office of Environmental Assessment Recommendations
348 Regarding TCE Toxicity in Human Health Assessments.
349 Vista 2016. Final 2015 Annual Land Use Control Monitoring Report, RVAAP-01 Ramsdell
350 Quarry Landfill and RVAAP-05 Winklepeck Burning Grounds.

Table A.8-1 Summary of Toxicity Criteria Changes for RVAAP Human Health Constituents of Concern

Constituent of Concern	Area	Media	Cleanup Goal Basis	Date of Risk Assessment / ROD / ESD	Toxicity Criteria Last Reviewed in IRIS	Current Toxicity Criteria Source (and date if not IRIS)	Change in Toxicity Criteria since ROD/Risk Assessment?
Inorganics							
Aluminum	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1987	PPRTV (2006)	No, derivation of risk-based concentrations used current toxicity criteria
Antimony	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1987	IRIS	No, derivation of risk-based concentrations used current toxicity criteria
Arsenic	LL1 - 4, LL 12	soil and dry sediment	Risk	2004 / 2007, 2009	1991 (oral reference dose), 1994 (carcinogenicity)	IRIS (cancer criteria and oral reference dose), CalEPA (inhalation reference dose, 2008)	No change in primary toxicity criteria for ingestion; new Tier III toxicity source (CalEPA) for inhalation reference concentration.
Barium	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	2005 (oral reference dose), 1994 (inhalation reference concentration and carcinogenicity)	IRIS (oral reference dose), HEAST (inhalation reference concentration)	Yes, updated toxicity criteria indicates barium is less toxic now than at time of derivation of risk-based cleanup goal
Cadmium	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1989 (oral reference dose), 1987 (carcinogenicity)	IRIS (inhalation unit cancer risk and oral reference dose), ATSDR 2012 (inhalation reference concentration)	No change in primary toxicity criteria for ingestion; new Tier III toxicity source (ATSDR) for inhalation.
Chromium, hexavalent	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1998	IRIS (oral reference dose, inhalation reference concentration, and inhalation unit cancer risk), New Jersey 2008 (oral cancer slope factor)	Yes, updated toxicity criteria for carcinogenicity via oral exposure could increase toxicity, as evaluated in 2012 Five Year Review.
Lead	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	2004 (oral reference dose), 1988 (carcinogenicity)	USEPA Adult lead model (2009 update)	Yes, the Adult Lead Model was updated in 2009. This was assessed in the 2012 Five Year Review; this update does not affect protectiveness
Manganese	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1995 (oral reference dose), 1993 (inhalation reference concentration), 1988(carcinogenicity)	IRIS	No, derivation of risk-based concentrations used current toxicity criteria
Explosives							
2,4,6-TNT	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1988 (oral reference dose), 1989 (carcinogenicity)	IRIS	No, derivation of risk-based concentrations used current toxicity criteria
RDX	LL1 - 4, WBG	soil and dry sediment	Risk	2004 / 2007, 2008/2013/2015	1988 (oral reference dose), 1990 (carcinogenicity)	IRIS	No, derivation of risk-based concentrations used current toxicity criteria
PCBs							
Aroclor-1254	LL1 - 4	soil and dry sediment	Risk	2004 / 2007	1994	IRIS	No, derivation of risk-based concentrations used current toxicity criteria
SVOCs							
Benz(a)anthracene	LL1 - 4, RQL, WBG	soil and dry sediment	Risk	2004 / 2007, 2006/2009, 2008/2013/2015	1994	IRIS (oral cancer slope factor), CalEPA 2011 (inhalation unit cancer risk)	No, derivation of risk-based concentrations used current toxicity criteria
Benzo(a)pyrene	LL1 - 4, RQL, WBG	soil and dry sediment	Risk	2004 / 2007, 2006/2009, 2008/2013/2015	1994	IRIS (oral cancer slope factor), CalEPA 2011 (inhalation unit cancer risk)	No, derivation of risk-based concentrations used current toxicity criteria
Benzo(b)fluoranthene	LL1 - 4, RQL, WBG	soil and dry sediment	Risk	2004 / 2007, 2006/2009, 2008/2013/2015	1994	IRIS (oral cancer slope factor), CalEPA 2011 (inhalation unit cancer risk)	No, derivation of risk-based concentrations used current toxicity criteria
Dibenz(a,h)anthracene	LL1 - 4, RQL, WBG	soil and dry sediment	Risk	2004 / 2007, 2006/2009, 2008/2013/2015	1990	IRIS (oral cancer slope factor), CalEPA 2011 (inhalation unit cancer risk)	No, derivation of risk-based concentrations used current toxicity criteria
Indeno(1,2,3-cd)pyrene	RQL, WBG	soil and dry sediment	Risk	2006/2009, 2008/2013/2015	1990	IRIS (oral cancer slope factor), CalEPA 2011 (inhalation unit cancer risk)	No, derivation of risk-based concentrations used current toxicity criteria

Current toxicity criteria source identified in the May 2016 USEPA regional risk-based screening levels

IRIS is the USEPA Integrated Risk Information System, the primary source of toxicity criteria for CERCLA.

PPRTV are the USEPA's provisional peer reviewed toxicity criteria, the secondary source of toxicity criteria for CERCLA, when IRIS toxicity criteria are absent.

CalEPA is the California Environmental Protection Agency, a tertiary source of toxicity criteria for CERCLA, when IRIS toxicity criteria are absent.

HEAST is the USEPA's health effects summary assessment table, a tertiary source of toxicity criteria for CERCLA, when IRIS toxicity criteria are absent.

Table A.8-2 Comparison of Decision Document-Based CUG with Facility Wide Cleanup Goals and Current USEPA Risk-Based Screening Levels for Industrial Use for COCs Covered by this Five Year Review

	Decision Document based CUG				2010 FWCUG	National Guard Trainee Surface Soil FWCUG		Surface Soil Background	Subsurface soil Background	Resident Farmer Adult FWCUG		2013 Residential RSL for Chemicals w/No FWCUG 10 ⁻⁵ or HI =1	Current (2016) EPA RSL Industrial Use 10 ⁻⁵ or HI=1
Constituent of Concern	LL 1-4, 12 (2007/2009)	RQL (2009)	WBG (2008)	WBG (2015)		Non- Cancer HI = 1	Cancer Risk = 10 ⁻⁵			Non- Cancer HI = 1	Cancer Risk = 10 ⁻⁵		
Inorganics													
Aluminum	34,942				34,960	34,960	*	17,700	19,500	529,229	*		1,100,000
Antimony	2,458				136	1,753	*	0.96	0.96	136	*		470
Arsenic	31				19.8	1,140	27.8	15.4	19.8	82.1	4.25		30
Barium	3,483				3,506	3,506	*	88.4	124	89,656	*		220,000
Cadmium	109				109	3,292	109	0	0	223	12,491		980
Chromium (hexavalent)	16				16.4	56.1	16.4	*	*	904	1,874		63
Lead	1,995				4,000			26.1	19.1			4,000	800
Manganese	1,800 (surface) / 3,030 (subsurface)	1,800			3,030	351	*	1,450	3,030	14,817	*		26,000
Explosives - Propellants													
2,4,6 Trinitrotoluene	1,646			420	211	2,488	4,643	*		211	328		510
RDX	838		617	240	1,452	17,113	1,452	*		1,632	*		280
Semi-Volatiles													
Benzo(a) anthracene	105	13			2.21	*	47.7			*		2.21	29
Benzo(a) pyrene	10	1.3	7.5	2.1	0.221	*	4.77			*		0.221	2.9
Benzo(b) fluoranthene	105	13	75		2.21	*	4.77			*		2.21	29
Dibenz(a,h) anthracene	10	1.3			0.221	*	4.77			*		0.221	2.9
Indeno(1,2,3-cd) pyrene		13			2.21	*	47.7			*		2.21	29
PESTICIDES & PCBs													
PCB-1254	35				2	54.9	34.6			3.48		2.03	9.7

All units are mg/kg

This table is adopted from Table 7-1 of the Characterization Sampling Report of Load Lines 1,2,3,4 and 12 (Prudent 2013)

Current EPA RSL are the May 2016 USEPA regional risk-based screening levels

ATTACHMENT 9
Public Notices

AFFIDAVIT OF DISTRIBUTION

STATE OF: Ohio

COUNTY OF: Summit

I, **Ann Hartman**, clerk of THE BEACON JOURNAL PUBLISHING COMPANY, publishers of THE AKRON BEACON JOURNAL, on oath, say that this notice has been published **ONE TIME** on the **21st day of August 2016**, for **U.S. Army Corps of Engineers** in said paper printed and published in the City of Akron, County of Summit, State of Ohio, and of general circulation therein.

SIGNED: Ann Hartman

Sworn to before me, and subscribed in my presence this 21st day of Sept, 2016.

Kimberly J. Anderson
Notary Public, Summit County, Ohio

My Commission Expires 4/2/2020

Notary Seal:



Kimberly J. Anderson
Resident Summit County
Notary Public, State of Ohio
My Commission Expires: 04/02/2020



US Army Corps
of Engineers.
BUILDING STRONG.

PUBLIC NOTICE

Camp Ravenna Joint Military Training Center Army National Guard Begins Second Five-Year Review

The Army National Guard has begun a second five-year review of environmental remedies undertaken as part of the Ravenna Army Ammunition Plant Restoration Program at the Camp Ravenna Joint Military Training Center in Portage and Trumbull Counties, Ohio. The focus of the five-year review will be the following sites: Ramsdell Quarry Landfill, Winklepeck Burning Grounds, Load Line 1, Load Line 2, Load Line 3, Load Line 4, and Load Line 12.

Ramsdell Quarry Landfill is located in the eastern section of Camp Ravenna. It was an abandoned quarry that was used as a landfill for domestic, commercial, industrial, and solid wastes. Soil and sediment were contaminated by polycyclic aromatic hydrocarbons (PAHs) from these activities. A Record of Decision (ROD) was signed in 2009 that established excavation and off-site disposal of contaminated soil and sediment. Miscellaneous debris containing asbestos was discovered during implementation of the remedy in 2010. The remedy was subsequently revised to include installation of a security fence around the landfill and best management practices to remove surficial asbestos-containing material (ACM) through non-intrusive methods.

Winklepeck Burning Grounds is located in the center of Camp Ravenna. It was used for open burning activities in unlined pits, pads, on roads and roadside ditches, and in refractory-lined trays. Soil and dry sediment were contaminated by explosives, PAHs, and ACM from these activities. A ROD was signed in 2008 that established excavation and off-site disposal of chemically contaminated soil and dry sediment. An Explanation of Significant Differences was issued in 2015 that required removal of contaminated soil and sediment from additional areas to meet industrial use requirements and facilitate use of a future multi-purpose machine gun range.

Load Lines 1 through 4 are located in the southern section of Camp Ravenna. They were used to melt and load explosives into large caliber shells, for munitions rehabilitation activities, and for demilitarization of projectiles. These operations, together with maintenance, power generation, and wastewater treatment activities, resulted in the contamination of soil and dry sediment by metals, hexavalent chromium, explosives, polychlorinated biphenyls, and PAHs. An interim ROD was signed in 2007 that established excavation and off-site disposal of contaminated soil and dry sediment, groundwater monitoring, and maintenance of former building slabs to prevent leaching of potentially contaminated soil and dry sediment.

Load Line 12 is located in the southeast portion of Camp Ravenna. It was used for the production of ammonium nitrate and ammonium chloride and for demilitarization activities to recover explosives from bombs. A wastewater treatment plant was also operated on the site. Soil and dry sediment were contaminated by arsenic from these activities. A ROD was signed in 2010 that required excavation and off-site disposal of contaminated soil and dry sediment and land use controls.

The five-year review will be conducted to determine whether the remedies remain protective of human health and the environment and function as intended by the RODs. The five-year review will also assess factors to determine if the remedies will continue to be protective in the future. The report is scheduled for completion by August 31, 2017.

If you have any concerns about these sites, please contact:

Mr. Mark Leeper
Environmental Cleanup Program Manager
Army National Guard Directorate
Environmental Programs Division
ARNG-IED
111 South George Mason Drive
Arlington, VA 22204-1382
(703) 607-7955
Mark.s.leeper.civ@mail.mil

A copy of the final report will be available at the following locations:

Information Repositories:

Reed Memorial Library
167 East Main Street
Ravenna OH 44266

Newton Falls Public Library
204 South Canal Street
Newton Falls, OH 44444

Contact Information:

(330) 296-2827

Hours: 9 a.m. to 9 p.m. (Monday to Thursday)
9 a.m. to 6 p.m. (Friday)
9 a.m. to 5 p.m. (Saturday)
1:00 p.m. to 5:00 p.m. (Sunday)

(330) 872-1282

Hours: 10 a.m. to 8 p.m. (Monday to Thursday)
9 a.m. to 5 p.m. (Friday and Saturday)

31170290

Proof of Publication

Record Publishing Company

1050 W. Main Street,

Kent, OH 44240

Phone (330) 541-9400

Fax (330) 673-6363

I, **KSS/f(j) Kliskey**, being first duly sworn depose and say that I am Advertising Clerk of
Record Publishing Company

30 **Record-Courier** a newspaper printed and published in the city of Kent, and of General circulation in the County of **Portage**, State of Ohio, and personal knowledge of the facts herein stated and that the notice hereto annexed was Published in said newspapers for **1** insertions on the same day of the week from and after the **28th** day of **August**, 2016 and that the fees charged are legal.



Name of Account: **US ARMY CORPS OF ENGINEERS, BUFFALO DISTRICT**


Ad Number: **12214817**

No. of Lines: **72**

Day(s) Published: **08/28,**

Printers Fee: **\$110.70**

Sworn to and subscribed before this **29th** day of **August**, 2016.



Elizabeth McDaniel

Notary Public

Commission Expires June 19, 2021

**205 Appliances /
Electronics**

LG DRYER
slate, 5 yrs old, like new,
\$200. (330) 607-3378

**230 Farm Products /
Produce**

CANNING TOMATOES
\$18/bushel. HOT PEPPERS.
Mantua (330) 274-8354

Fresh picked
Medium hot & hot peppers
330-802-2912

GREEN BEANS,
Blue Lake * Half Runners
\$1.25/lb or \$30/Bushel
(330) 577-1918

250 Garage/Yard Sales

ESTATE/GARAGE SALE
5394 Juniper Ct. Ravenna OH
Fri-Sat-Sun, Aug 26-27-28,
9-5 Daily. Cash and Carry.
Huge selection of items!! Vin-
tage collectibles, tools and
toolboxes, housewares, jew-
elry, bikes, furniture, slot ma-
chine, coin collection, hunting
items!! Come see!!

Garrettsville- 8278 Water St,
Aug 26-27-28, 9-5. Toys,
clothes, boys, girls &
womens, furniture, household,
baby items

Kent 1981 Crossfield Cir
Aug 27 & 28, 10-3. House
and yard misc. items Patio
and other furniture, books,
yard tools, big ladder

Ravenna 4018 Bayberry Knoll
HUGE MULTI-FAMILY GAR-
AGE SALE-

Fri., Sat. Sun. 9-5
Quality items. Brand name
clothing: Nike, Under Armour,
Justice, Pink. Tools,
fishing, camping, hiking. Lots
of home decor, candles,
linens. Furniture, DVDs, vhs.
Collectibles, Antiques. Tons
of Disney, Fisher Price and
more new and vintage toys.
Monster high, Barbie, chapter
books, and so much more.
Don't miss this one!
Liquidating....

Ravenna Moving Sale 4939
John Thomas Rd. INDOOR
Sale, Large parrot and reptile
cages, auth. Native Am.
items, antiques, blown glass,
exercise equip, Schwinn ellip-
tical, zero turri lawnmower,
MUCH MORE, Sat, Sun 9-5,
330-814-1991

RAVENNA, 347 Oakwood
ST, Sat-Sun, Aug 27-28,
9-6pm. Yard Sale!
Come And Get It!!
Everything from A-Z

RAVENNA- 3152 Clearview
Rd. Aug 26-27-28, 10-4. Cryst-
al jewelry, military items, rail-
road clock, household goods,
frames, crafts, antique sewing
machine, antique air com-
pressor, clothes, shoes &
purses, ext ladder, misc items

ROOTSTOWN 5019 New
Milford Rd., Aug 26-27-28,
9-6. Huge multi family sale!
Clothes, household, Christ-
mas, baby items, 1968 CJ5
Jeep parts, 1977 Z28 boat

**AUCTION**

**2003 Kubota B2630 4x4 Loader Tractor With Back-
hoe - Power Tools - Antiques - Firearms - Hotsy
Power-Steam Washer - 3 Pt. Equipment - Trailer -
Miller Blue Star Generator/Welder**

Absolute auction, all sells to the highest bidders on location:

11579 BOWEN RD., MANTUA, OH 44255

Directions: Take SR 44 north of the Ohio Turnpike (I-80) 4.5
miles to SR 82 and west 1 mile to Bowen Rd. and south to
property. Watch for KIKO signs.

**FRIDAY - SEPTEMBER 16, 2016 - 3:30 PM
TRACTOR & MAJOR EQUIPMENT SELLS
AT 5:00 PM**

NOTE: Nice clean quality auction. See www.kikoauctions.com
for full details. Open auction day only starting at 12:00
PM.

AUCTION BY ORDER OF: Gary & Cyndi Keefer

AUCTIONEER/REALTOR: Jack W. Kiko 330-206-0174
and John D. Kiko, AARE, CAI ext. 122.

KIKO Auctioneers
(330) 455-9357
www.kikoauctions.com

**BRINGING
YOU THE NEWS
IN PRINT
AND ONLINE**

Record-Courier
www.recordpub.com

335 Free Bees

1970 cub cadet tractor and
mower. missing engine. \$80
330-297-6150 / 330-348-6378

42 in. Mower. Good 15 hp en-
gine, bad trans. no battery or
deck. Free. 330-673-6802.

52" Roll top desk
\$60.00
330-348-6378 / 330-297-6150

7 cu. ft upright freezer
\$65.00
330-348-6378/330-297-6150

Aluminum storm windows.
Two 32 x 63" \$10.00
330-467-9357

Artist Easel
\$30.00
(330) 527-4411

Assortment of 45 rpm records
rock& roll, Elvis, misc singers
\$95.00 330 678 0863

Beer sign 16" w x 21" h, plas-
tic, chrome lion "Lowenbrau"
\$30.00 (330) 677-5334

BLACK SLIP-ON TENNIS
SHOES LADIES Sz 8 worn x2
\$6. Text Ple 330-603-5480

BOOKS (2) HISTORY SU-
PREME COURT 1789-1918
Warren \$20 330-603-5480

Boys 24" Mongoose Bike
XR75 Racing Bke Good Con-
dition \$35 330-296-5766

Bushnell binoculars excellent
condition, in carrying case
\$25.00 (330) 593-1766

COLLECTIBLE PLATES (6)

335 Free Bees

Pair of Bar/Counter Stools
Country Blue 28" tall basket
weave seat 239-362-2390

Pool table 7 ft. slate with
cover and accessories \$99.00
330 766 0543

Professional camera tripod,
full size, includes dolly.
\$35.00 (330) 677-5334

Rattlesnake & leather cowboy
boots Size 10.5 \$99.00
Call or text 330-671-1683

Reclaimed barn beam
\$75.00
330-807-9013

Slate Roof Pcs.
14-12"x24" \$25.00
330-296-7642

Solid wood door 78.5"x36"
with mirrored glass 20"x36"
\$75.00 (330) 527-4411

Stanley closet rods. New in
pkgs. 22 rods-48" to 72".
\$40.00 all. 330-968-6797

Vintage Roll Top Desk
\$75.00
234-380-1681

355 Wanted to Buy

ALWAYS Buying Junk cars,
trucks, buses, semi-trailers.
Call/Text Price 330-581-3536

BUYING All Gun Collections
large & small. All makes, all
models. Top \$\$ Paid!
Woody 330-819-3274



US Army Corps
of Engineers,
BUILDING STRONG.

PUBLIC NOTICE

**Camp Ravenna Joint Military Training Center
Army National Guard Begins Second Five-Year Review**

The Army National Guard has begun a second five-year review of environmental remedies undertaken as part of the Ravenna Army Ammunition Plant Restoration Program at the Camp Ravenna Joint Military Training Center in Portage and Trumbull Counties, Ohio. The focus of the five-year review will be the following sites: Ramsdell Quarry Landfill, Winklepeck Burning Grounds, Ldad Line 1, Load Line 2, Load Line 3, Load Line 4, and Load Line 12.

Ramsdell Quarry Landfill is located in the eastern section of Camp Ravenna. It was an abandoned quarry that was used as a landfill for domestic, commercial, industrial, and solid wastes. Soil and sediment were contaminated by polycyclic aromatic hydrocarbons (PAHs) from these activities. A Record of Decision (ROD) was signed in 2009 that established excavation and off-site disposal of contaminated soil and sediment. Miscellaneous debris containing asbestos was discovered during implementation of the remedy in 2010. The remedy was subsequently revised to include installation of a security fence around the landfill and best management practices to remove surficial asbestos-containing material (ACM) through non-intrusive methods.

Winklepeck Burning Grounds is located in the center of Camp Ravenna. It was used for open burning activities in unlined pits, pads, on roads and roadside ditches, and in refractory-lined trays. Soil and dry sediment were contaminated by explosives, PAHs, and ACM from these activities. A ROD was signed in 2008 that established excavation and off-site disposal of chemically contaminated soil and dry sediment. An Explanation of Significant Differences was issued in 2015 that required removal of contaminated soil and sediment from additional areas to meet industrial use requirements and facilitate use of a future multi-purpose machine gun range.

Load Lines 1 through 4 are located in the southern section of Camp Ravenna. They were used to melt and load explosives into large caliber shells, for munitions rehabilitation activities, and for demilitarization of projectiles. These operations, together with maintenance, power generation, and wastewater treatment activities, resulted in the contamination of soil and dry sediment by metals, hexavalent chromium, explosives, polychlorinated biphenyls, and PAHs. An interim ROD was signed in 2007 that established excavation and off-site disposal of contaminated soil and dry sediment, groundwater monitoring, and maintenance of former building slabs to prevent leaching of potentially contaminated soil and dry sediment.

Load Line 12 is located in the southeast portion of Camp Ravenna. It was used for the production of ammonium nitrate and ammonium chloride and for demilitarization activities to recover explosives from bombs. A wastewater treatment plant was also operated on the site. Soil and dry sediment were contaminated by arsenic from these activities. A ROD was signed in 2010 that required excavation and off-site disposal of contaminated soil and dry sediment and land use controls.

The five-year review will be conducted to determine whether the remedies remain protective of human health and the environment and function as intended by the RODs. The five-year review will also assess factors to determine if the remedies will continue to be protective in the future. The report is scheduled for completion by August 31, 2017.

if you have any concerns about these sites, please contact:

Mr. Mark Leeper
Environmental Cleanup Program Manager
Army National Guard Directorate
Environmental Programs Division
ARNG-IED
111 South George Mason Drive
Arlington, VA 22204-1382
(703) 607-7955
Mark.s.leeper.civ@mail.mil

A copy of the final report will be available at the following locations:


Information Repositories:
Reed Memorial Library
167 East Main Street
Ravenna OH 44266

Contact Information:
(330) 296-2827
Hours: 9 a.m. to 9 p.m. (Monday to Thursday)
9 a.m. to 6 p.m. (Friday)
9 a.m. to 5 p.m. (Saturday)
1:00 p.m. to 5:00 p.m. (Sunday)

Newton Falls Public Library
204 South Canal Street
Newton Falls, OH 44444

(330) 872-1282
Hours: 10 a.m. to 8 p.m. (Monday to Thursday)
9 a.m. to 5 p.m. (Friday and Saturday)

ATTACHMENT 10
Groundwater Information and Data

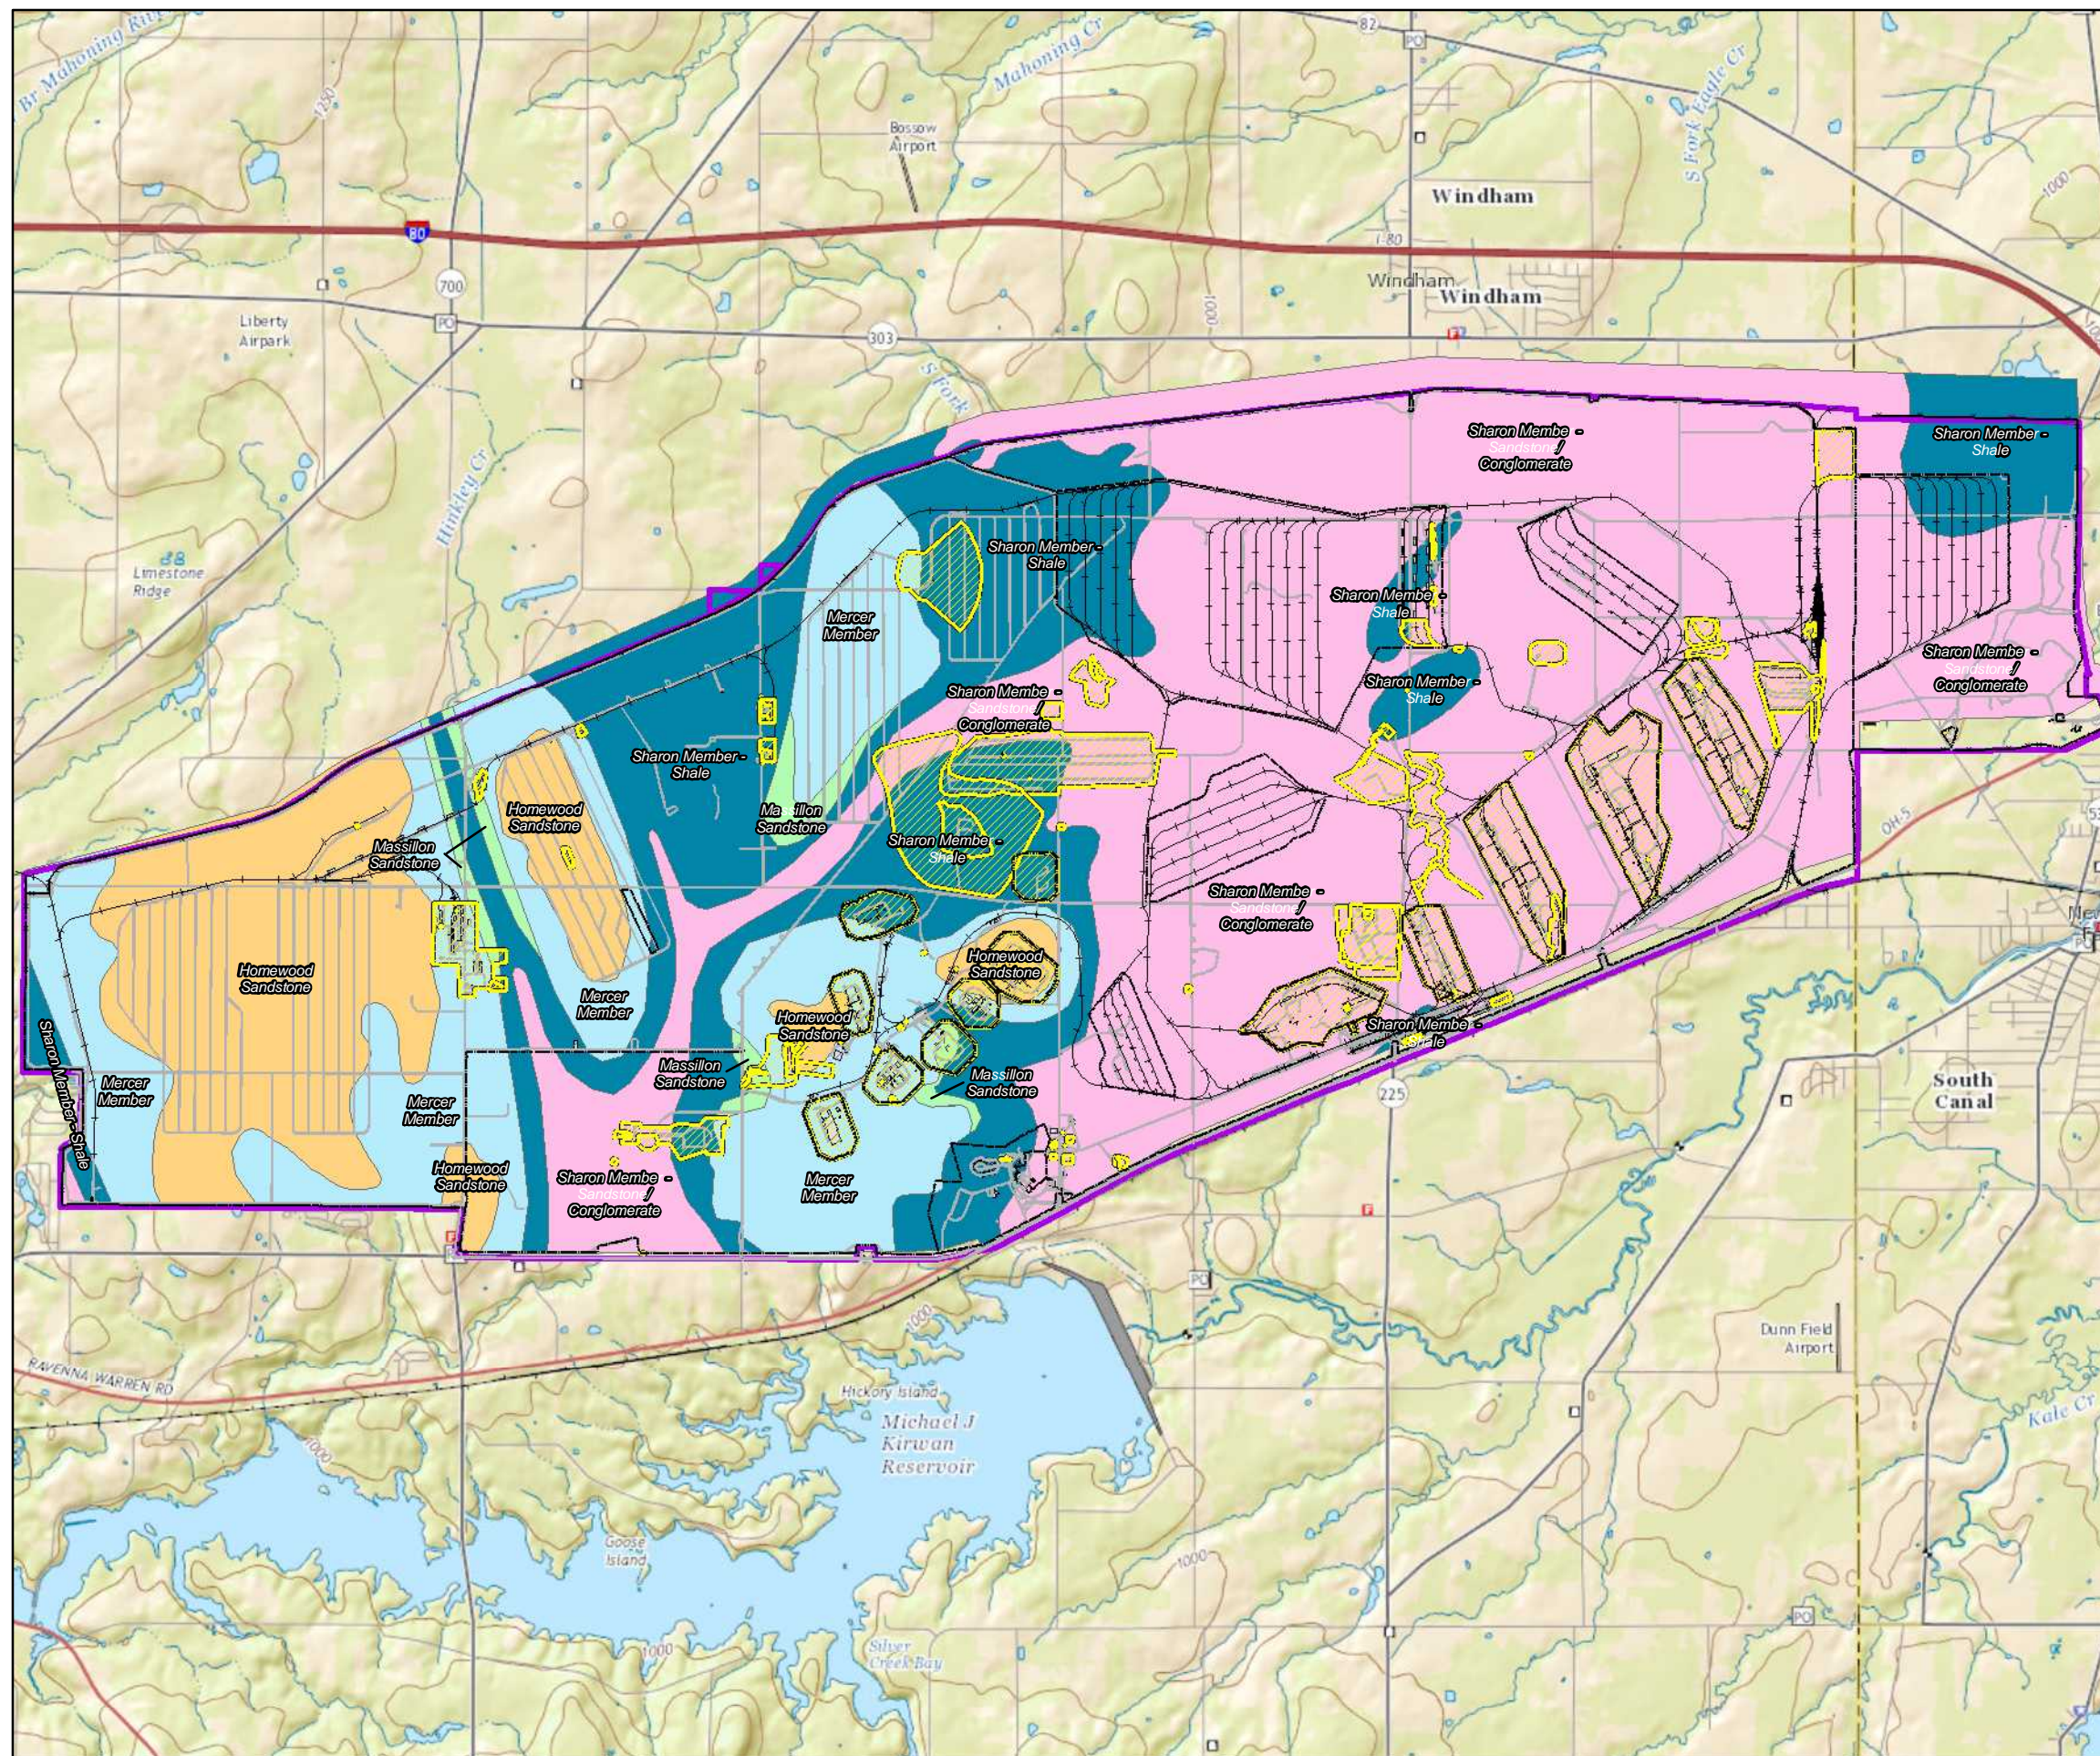


Legend

Geology Formation

- Homewood Sandstone
- Mercer Member
- Massillon Sandstone
- Sharon Member - Shale
- Sharon Member - Sandstone/Conglomerate
- Fenceline
- Roads
- Railroad
- Buildings
- AOCs
- Camp Ravenna Property Line

Notes:
- Basemap Source: ESRI Map Service - USGSTopo





SURFACE GEOLOGY MAP

Groundwater and Environmental Investigation
Services for RVAAP-66 Facility-wide Groundwater
Former Ravenna Army Ammunition Plant
Ravenna, Ohio

Figure: 1-2

DRAFT

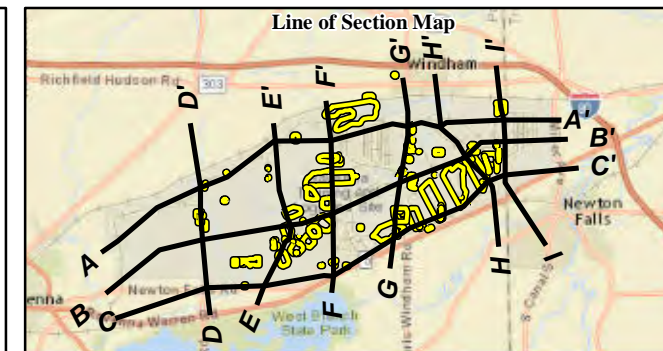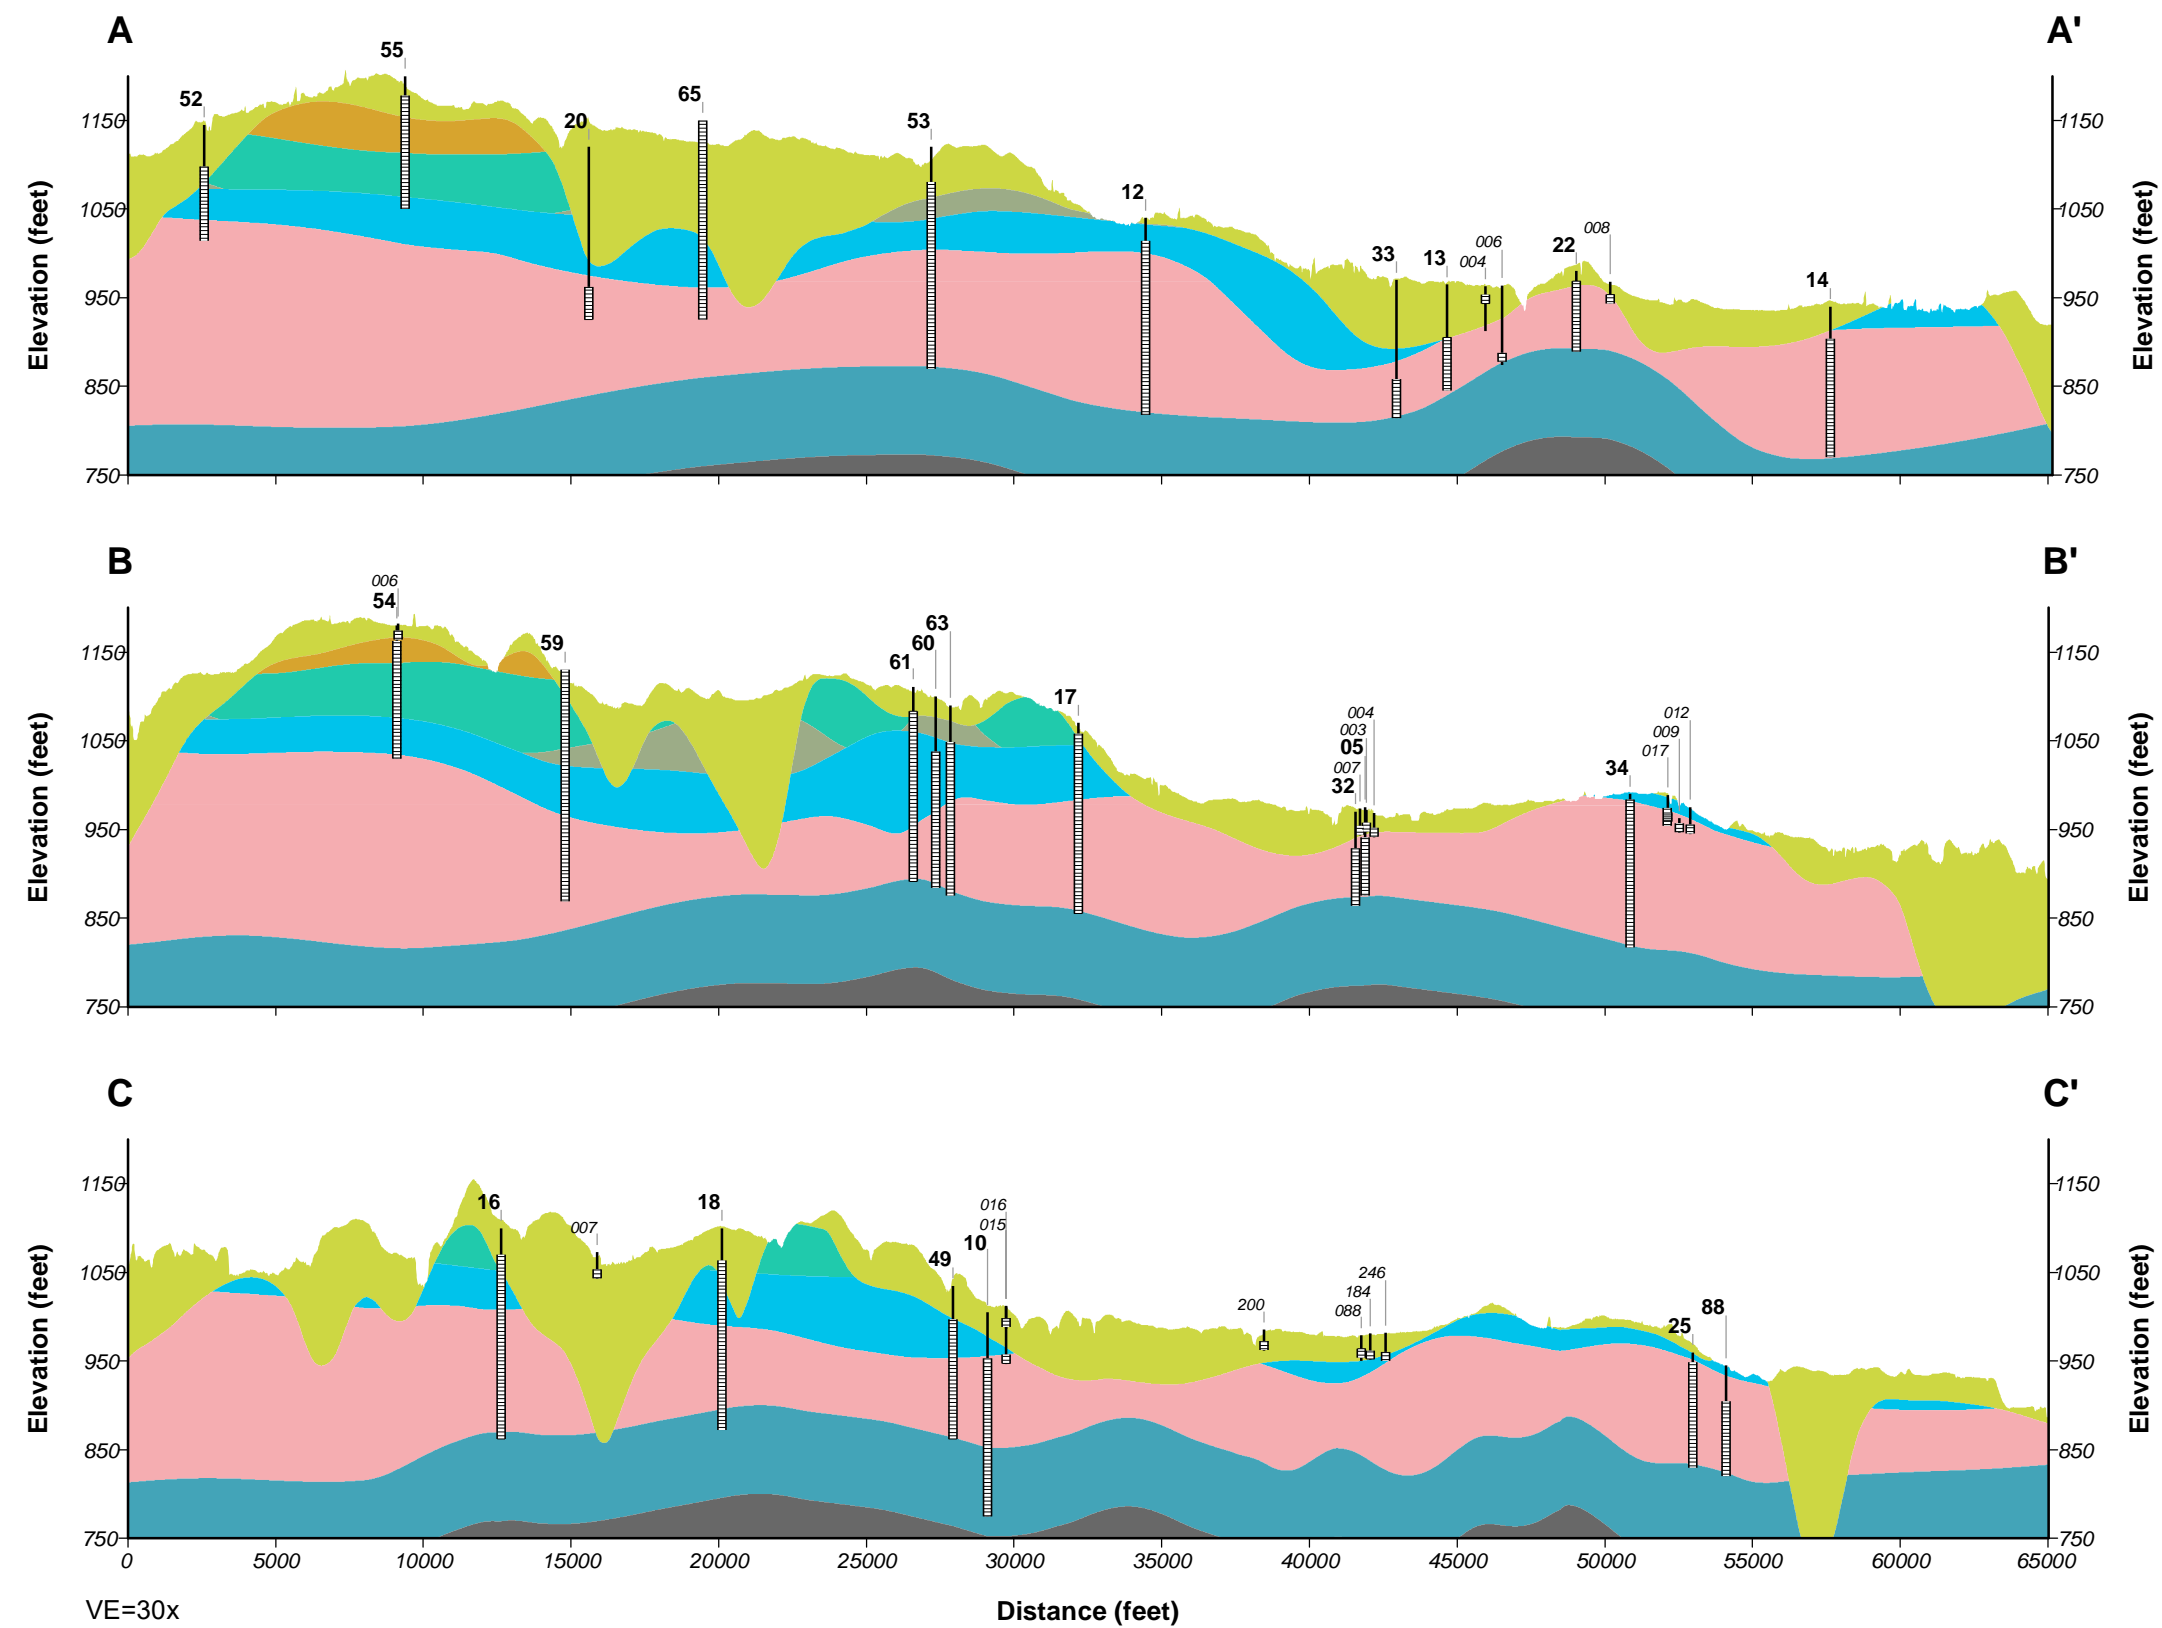

- Legend**
- AOC boundary
 - Lines of Section
- Site Wells**
- Leader
 - Casing
 - Screen
- Geology**
- Undifferentiated
 - Homewood Sandstone Member
 - Mercer Member
 - Massillon Sandstone Member
 - Sharon Member, Shale Unit
 - Sharon Member, Conglomerate Unit
 - Cuyahoga Group
 - Berea Sandstone
- Pottsville Formation

Notes:

- Former production well IDs are **bold**
- Site wells are *italicized* and have had the AOC prefix removed for clarity





EAST-WEST CROSS SECTIONS (A-C)

Groundwater and Environmental Investigation
Services for RVAAP-66 Facility-wide Groundwater
Former Ravenna Army Ammunition Plant
Ravenna, Ohio

Figure: 1-4


DRAFT

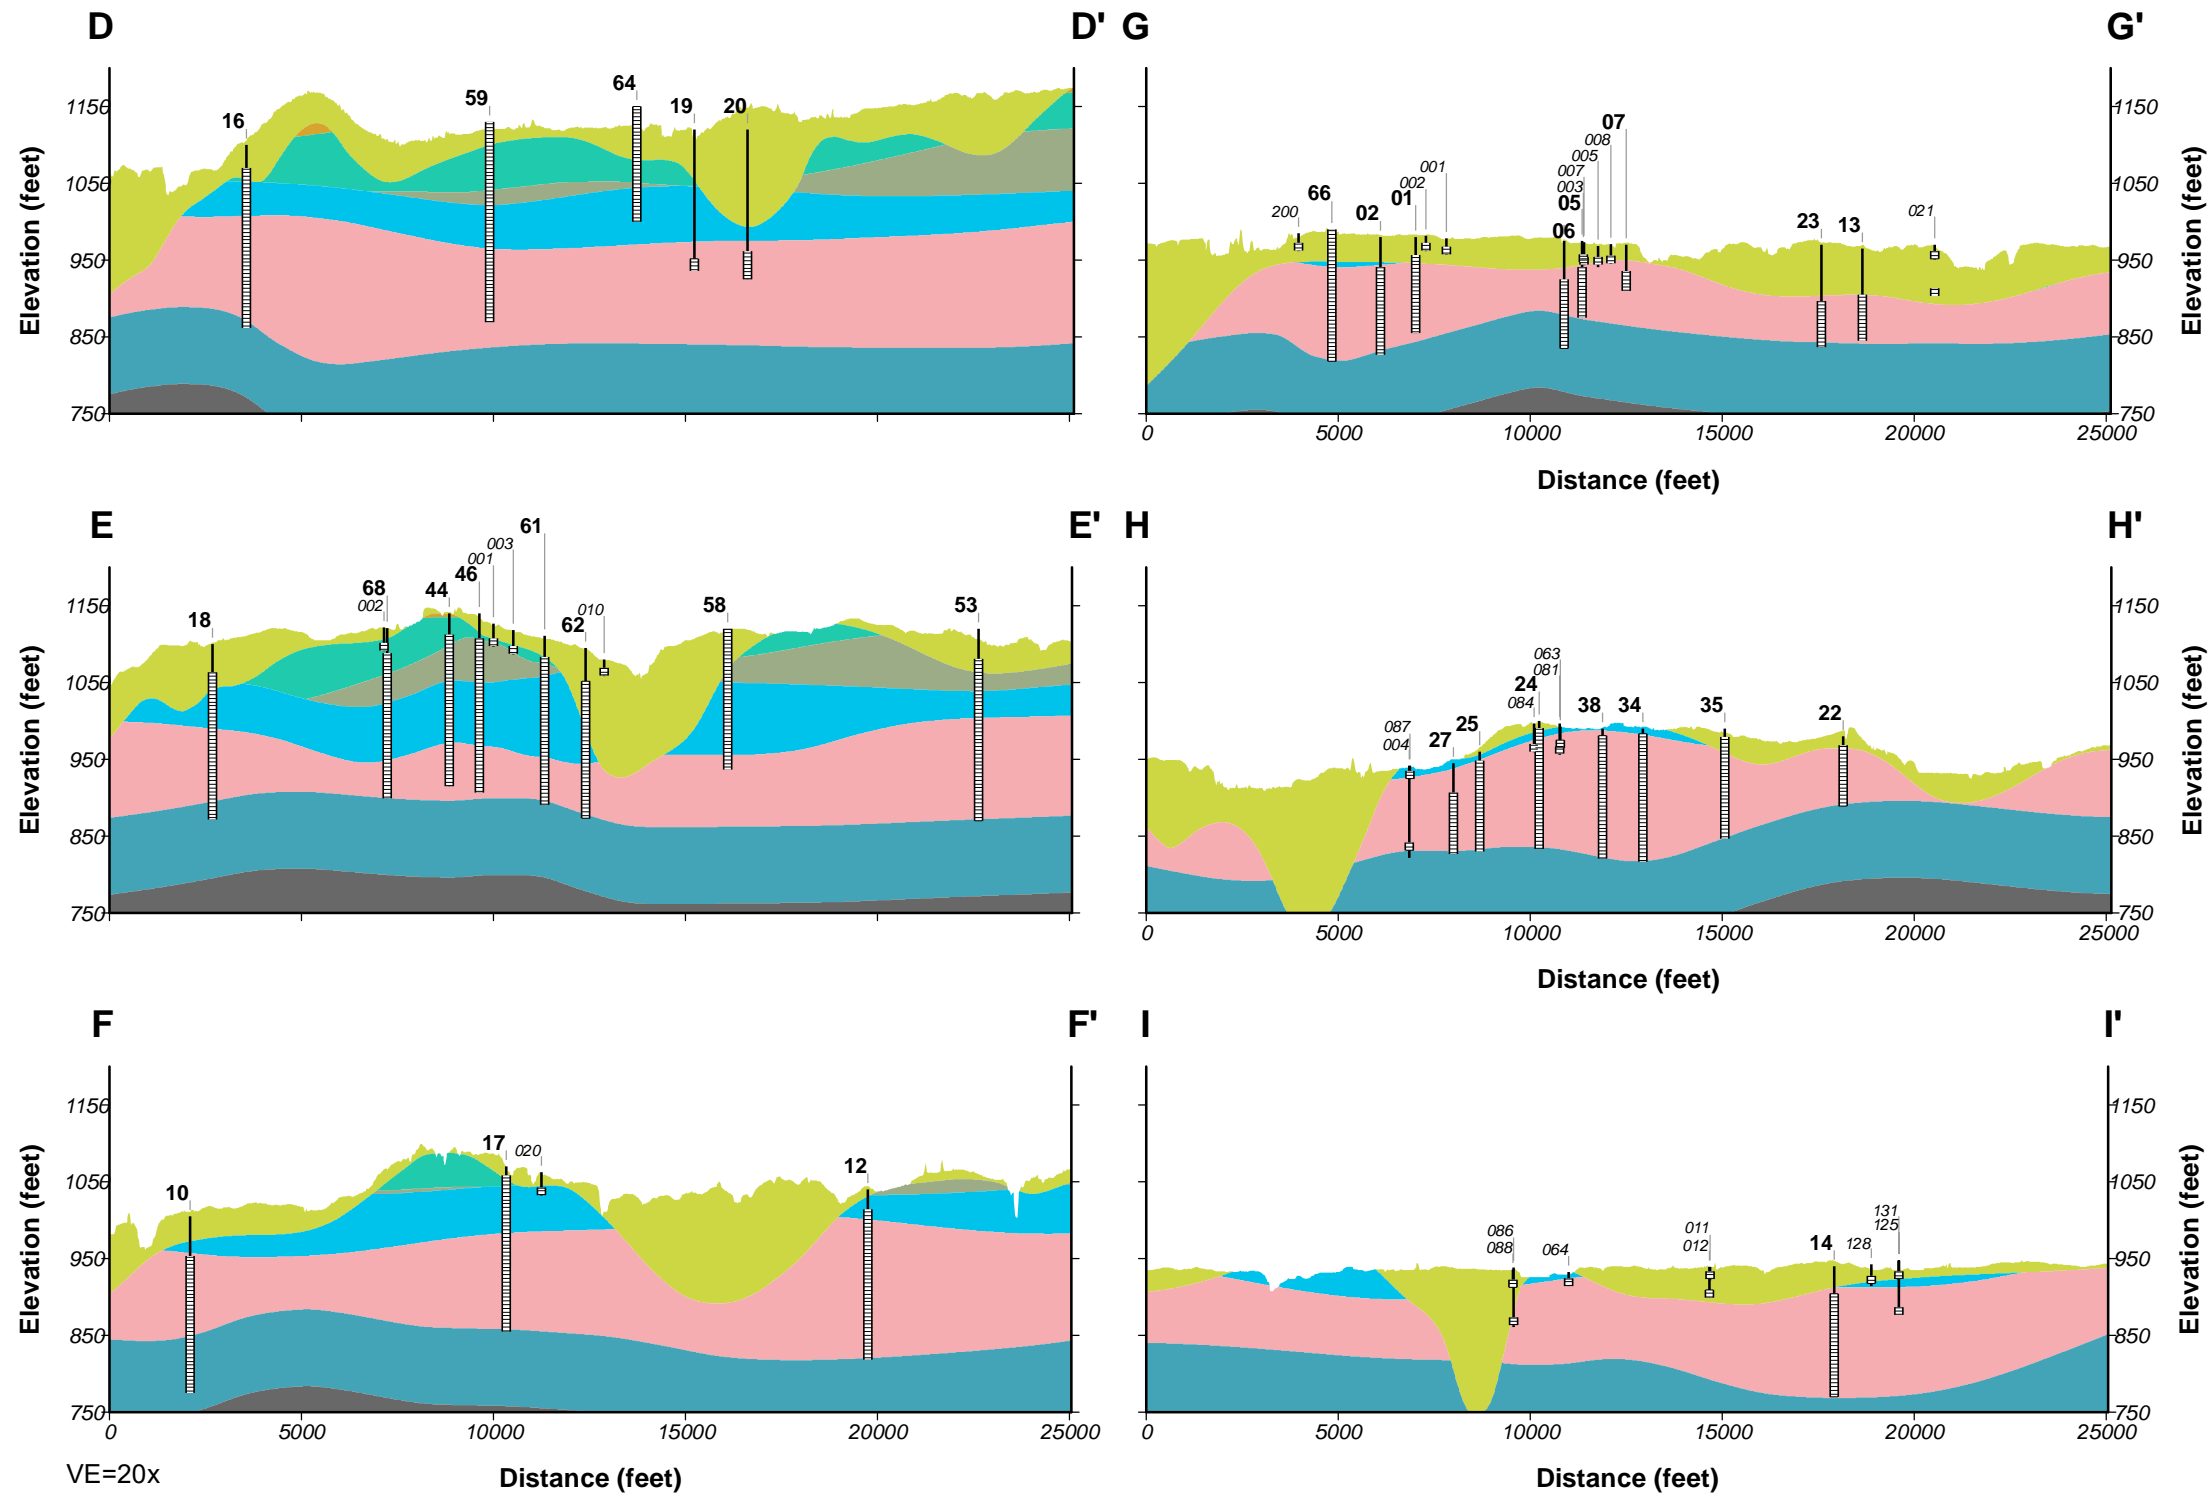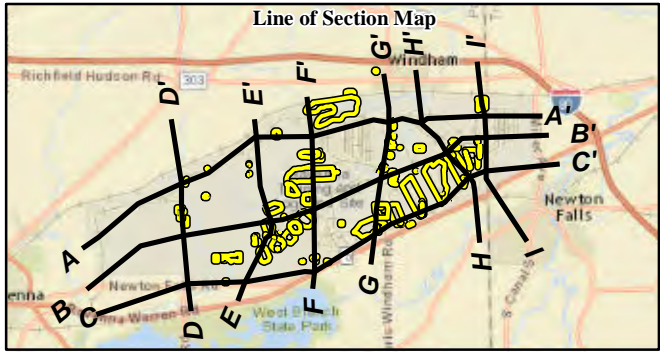

NORTH-SOUTH CROSS SECTIONS (D-I)
Groundwater and Environmental Investigation
Services for RVAAP-66 Facility-wide Groundwater
Former Ravenna Army Ammunition Plant
Ravenna, Ohio

Figure: 1-5

DRAFT

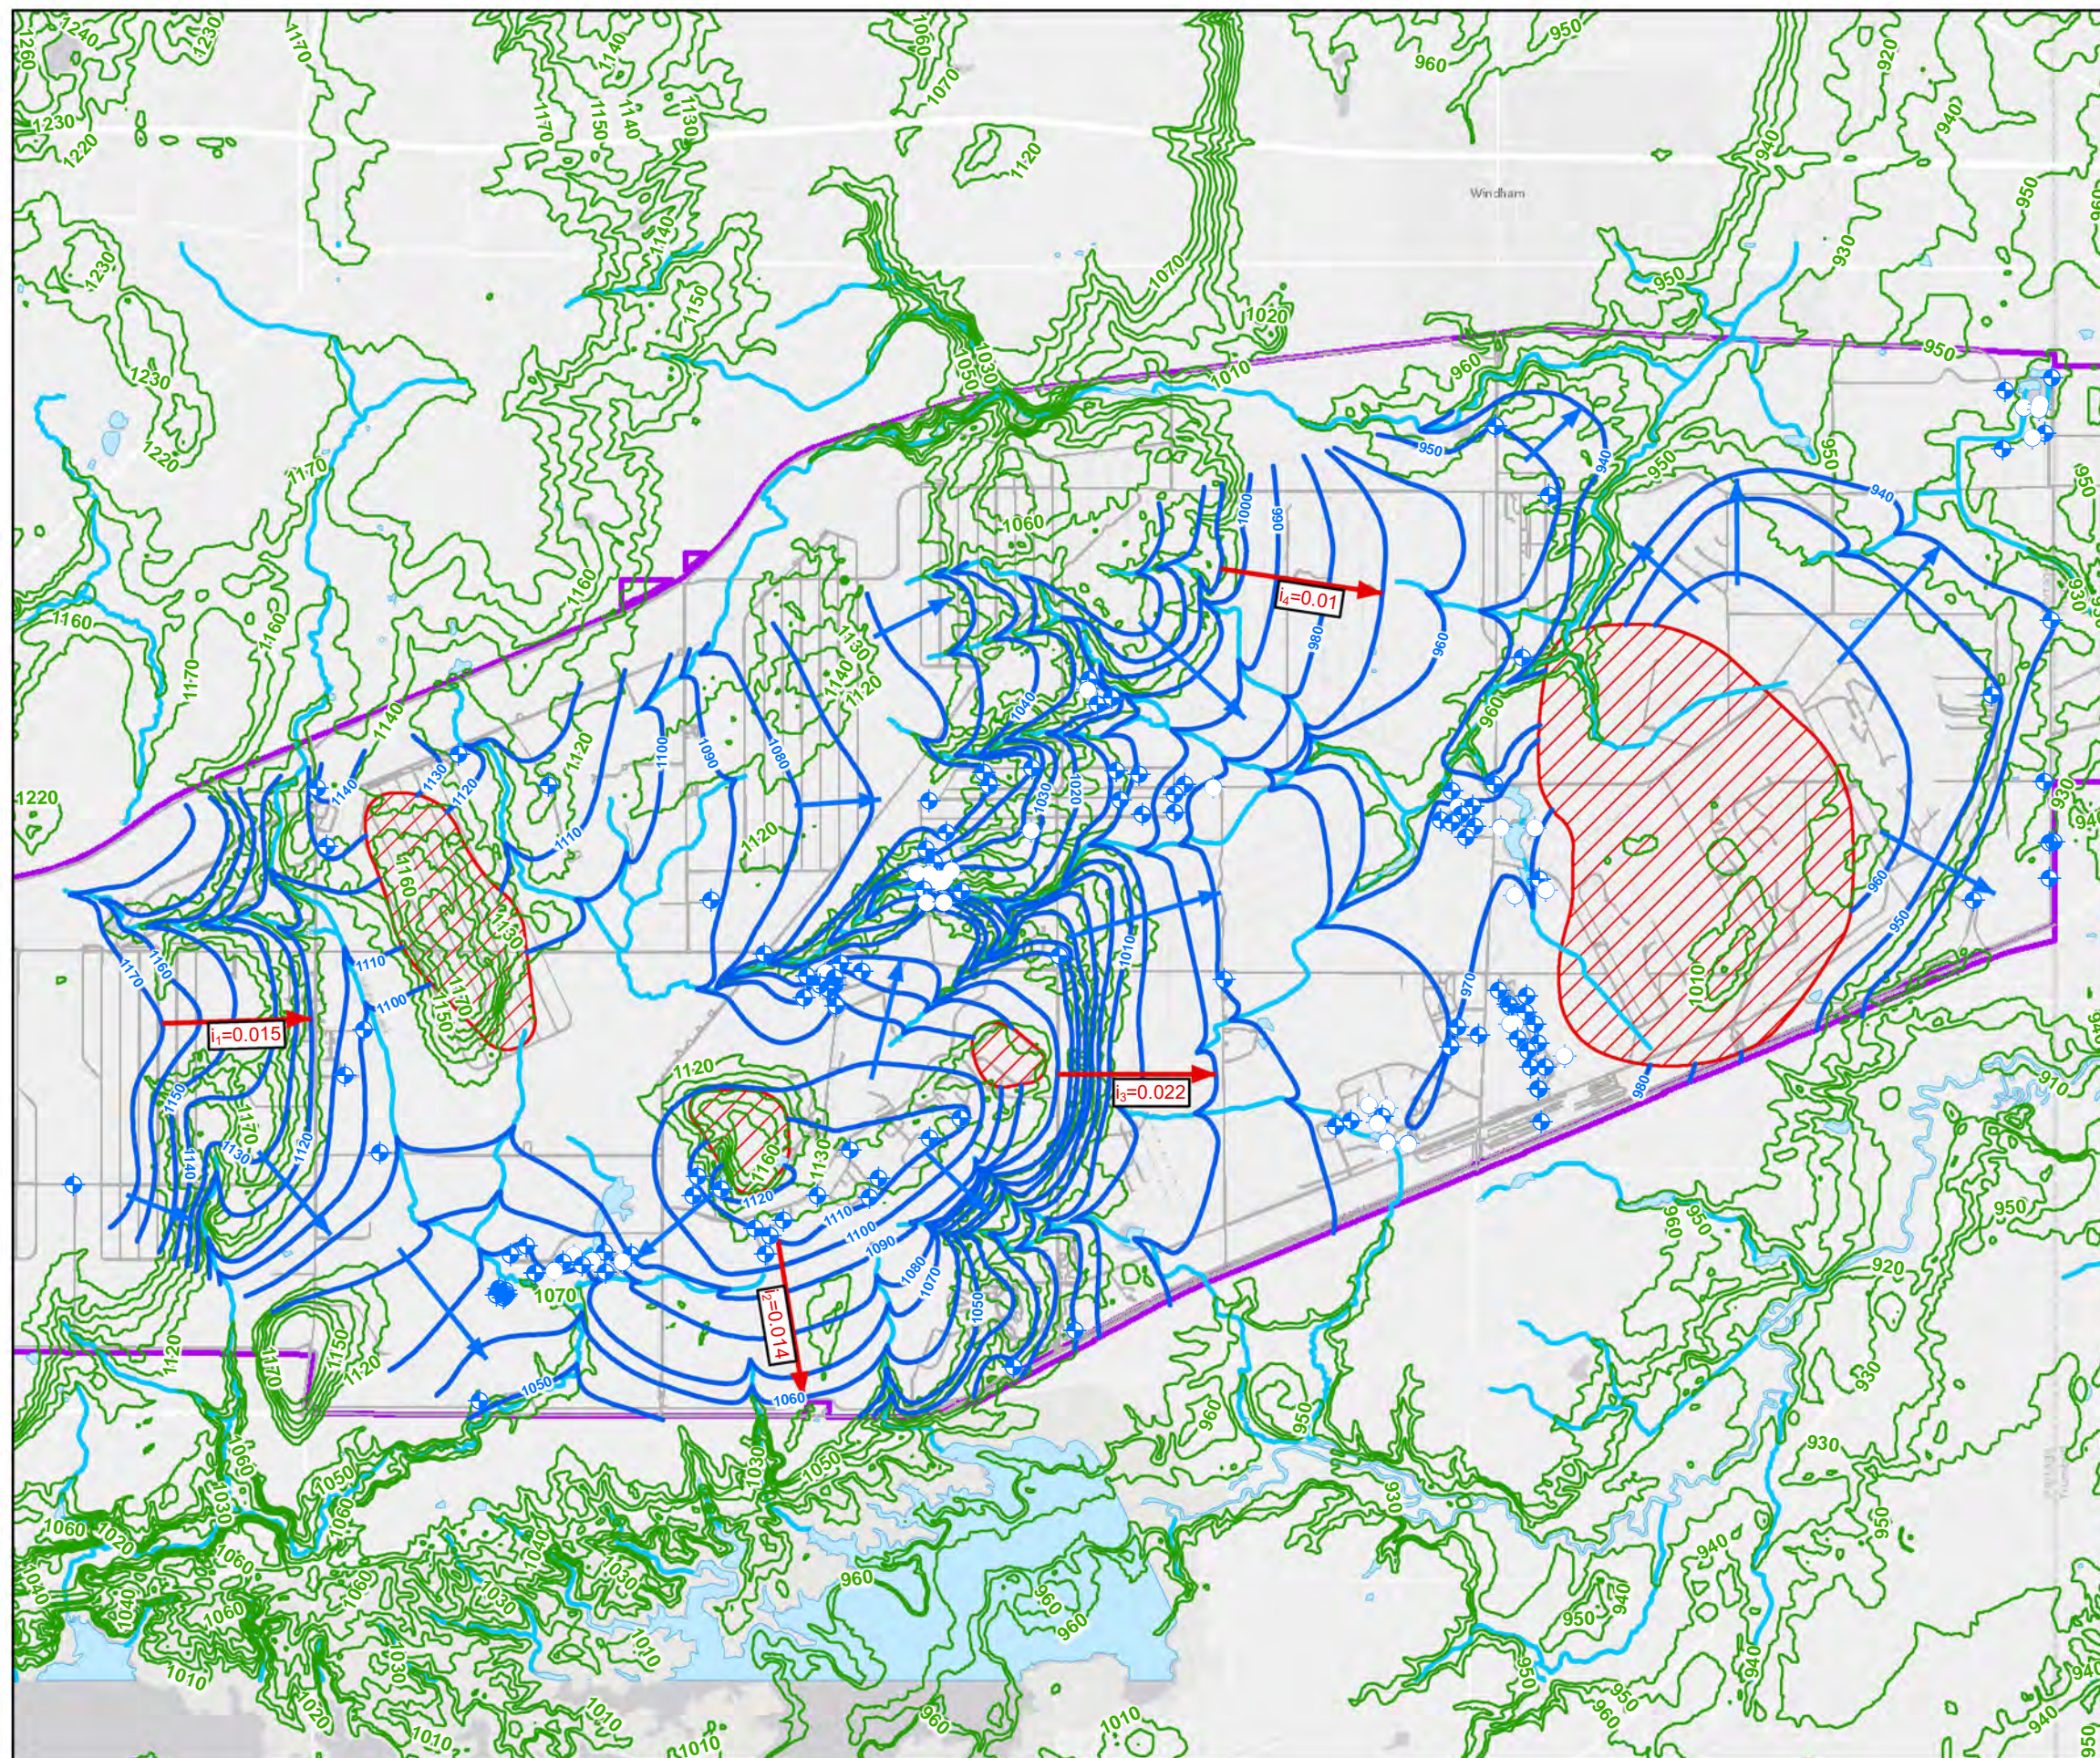


Legend

- Unconsolidated Well Location
- Unconsolidated Contours - 10ft Interval
- Direction Of Flow
- i_1 = Hydraulic Gradient (ft/ft)
- Roads
- Creeks and Streams
- Elevation Contours (Feet)
- Unconsolidated Aquifer Missing (See Notes Below)
- Camp Ravenna Property Line


Notes:

- Potentiometric Surfaces based on data collected in July 2015
- Basemap Sources: ESRI Map Services - Canvas/World_Light_Gray_Base and World_Street_Map
- Unconsolidated Aquifer indicated to not be present, based on the most recent Facility Wide Groundwater Monitoring Program Report on the January 2014 Sampling Event



**POTENTIOMETRIC SURFACE MAP
UNCONSOLIDATED AQUIFER**
Groundwater and Environmental Investigation
Services for RVAAP-66 Facility-wide Groundwater
Former Ravenna Army Ammunition Plant
Ravenna, Ohio

Figure: 3-1
DRAFT

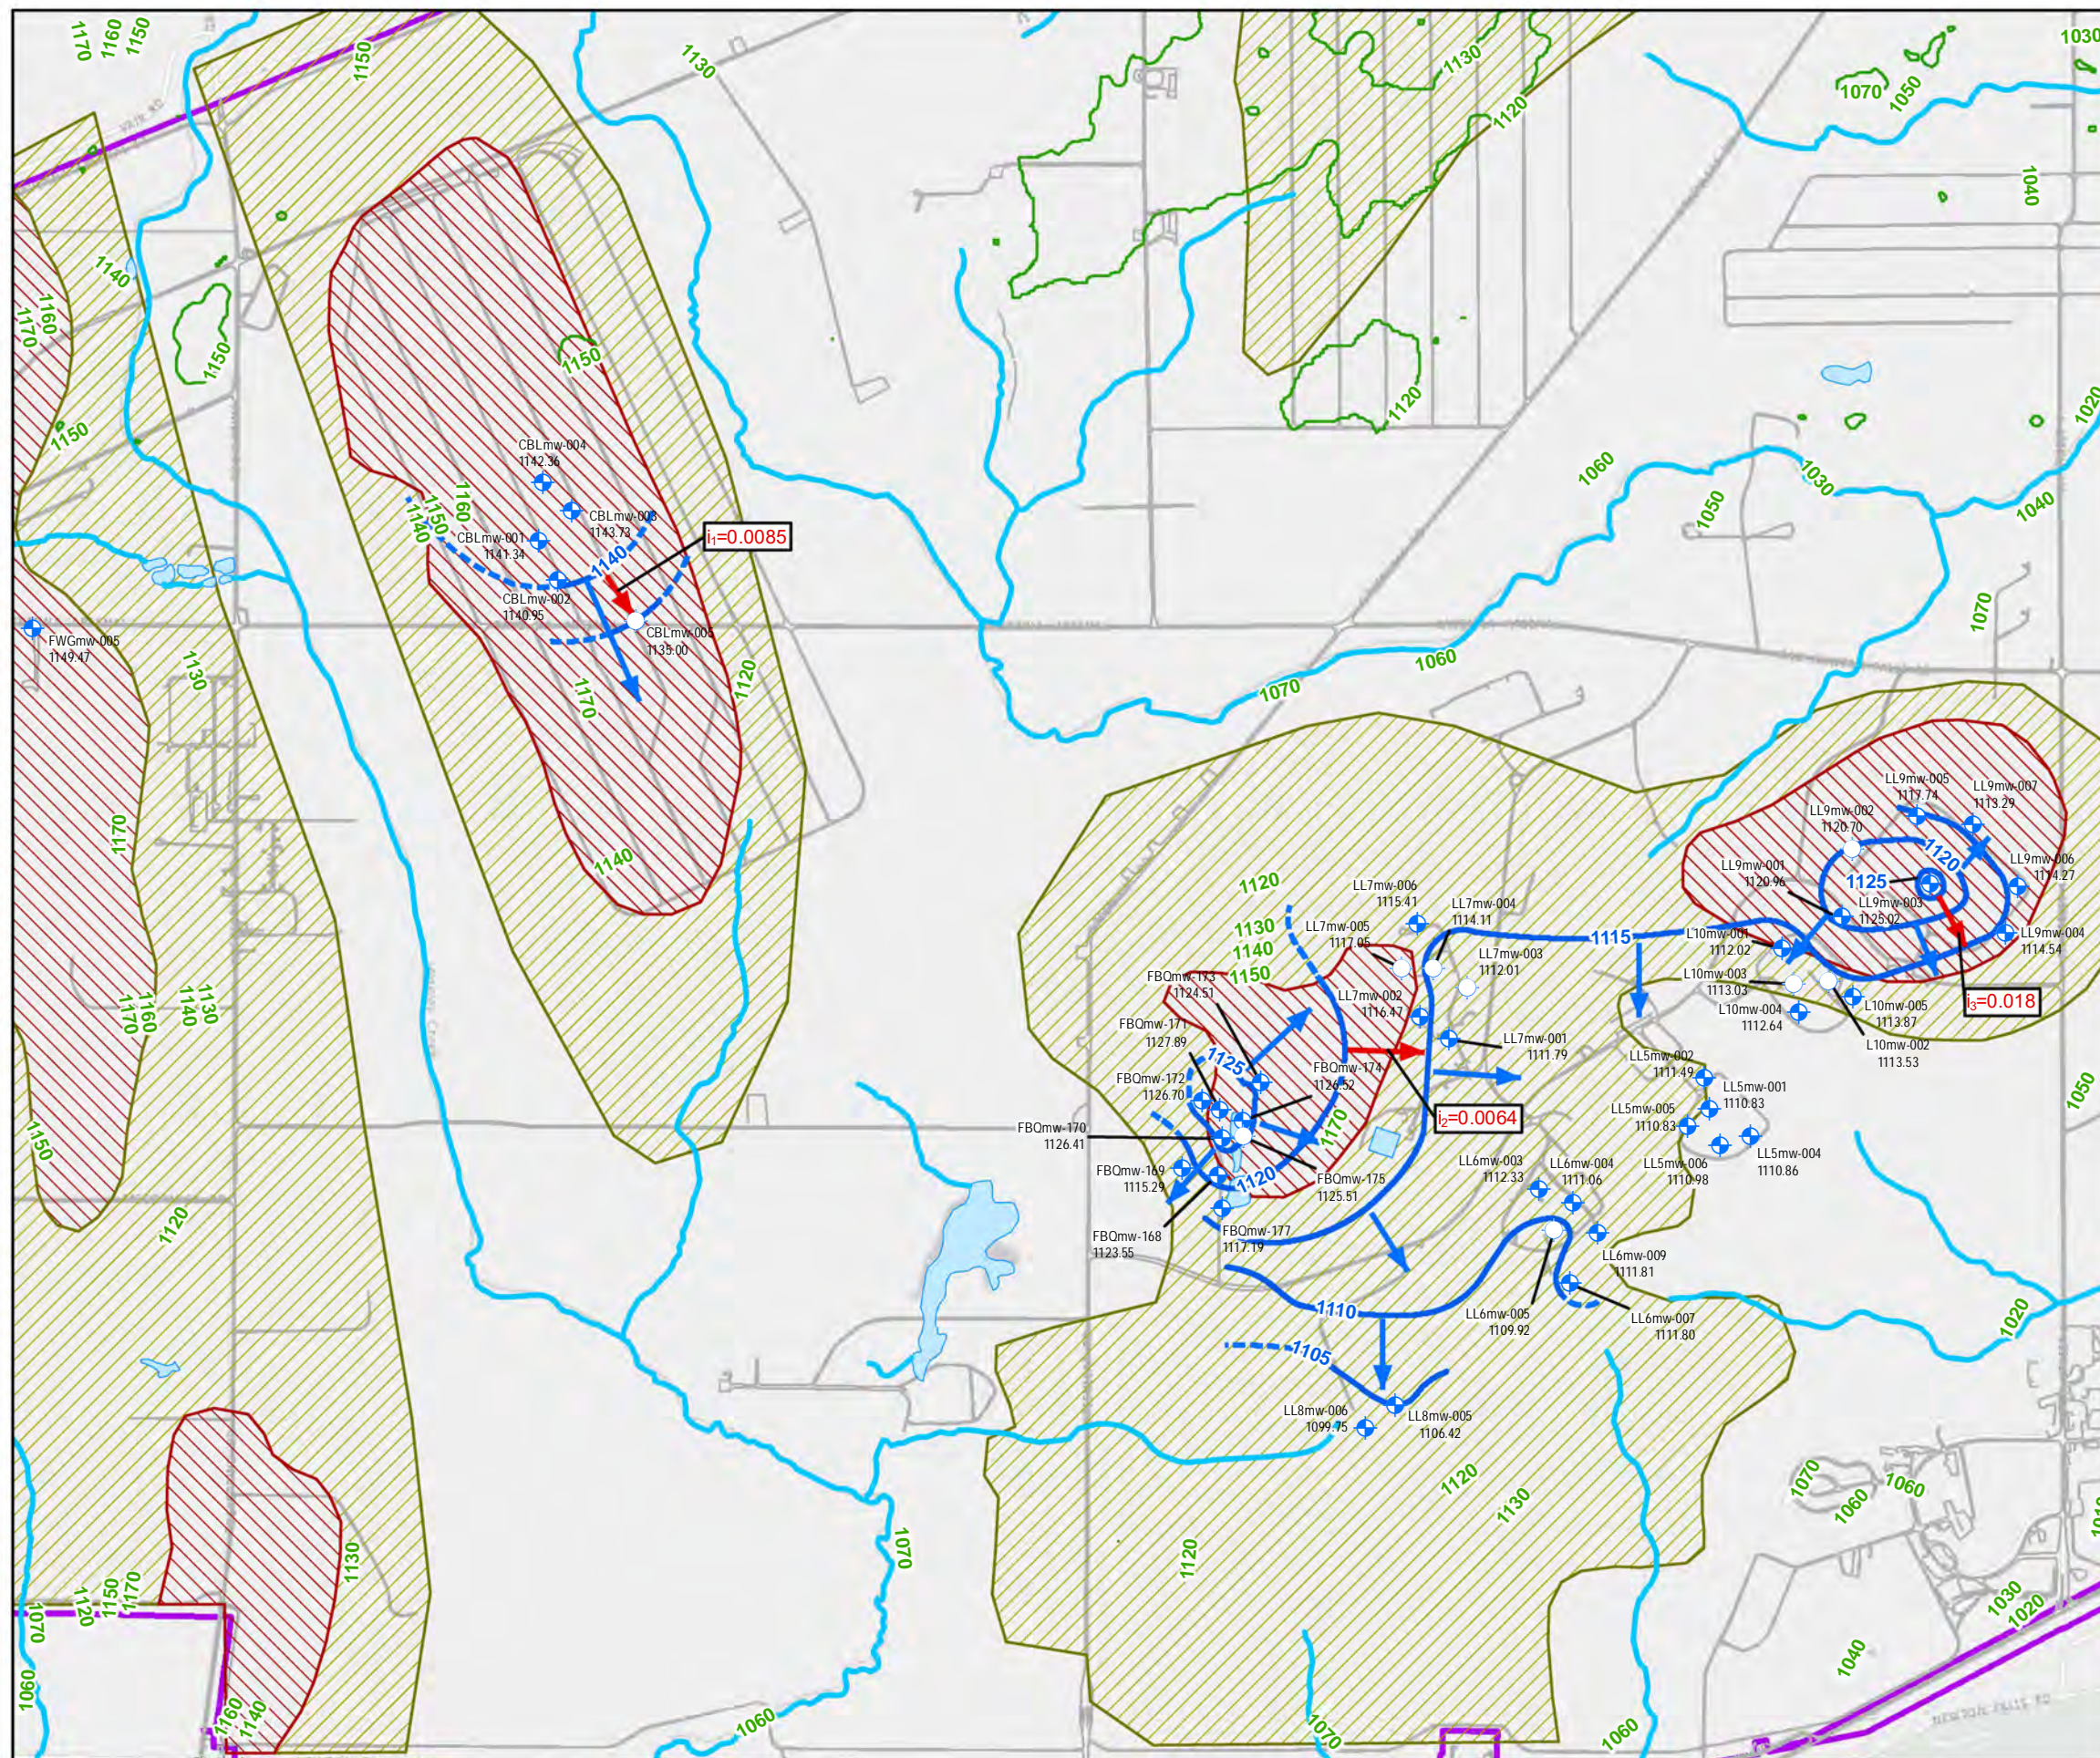

Legend

- Homewood or Mercer Well Locations
- Homewood and Mercer Contour Intervals
- Inferred Homewood and Mercer Contour Intervals
- Direction Of Flow
- i_1 = Hydraulic Gradient (ft/ft)
- Roads
- Creeks and Streams
- Elevation Contours (Feet)
- Camp Ravenna Property Line
- Homewood Sandstone Member
- Mercer Member

Notes:

- Potentiometric Surfaces based on data collected in July 2015
- Basemap Sources: ESRI Map Services - Canvas/World_Light_Gray_Base and World_Street_Map
- Surface Elevation Contours - USDA



0 1,625 3,250 Feet
1:19,500
NAD83 UTM Zone 17N





POTENTIOMETRIC SURFACE MAP HOMEWOOD SANDSTONE AQUIFER

Groundwater and Environmental Investigation
Services for RVAAP-66 Facility-wide Groundwater
Former Ravenna Army Ammunition Plant
Ravenna, Ohio

Figure: 3-2

DRAFT

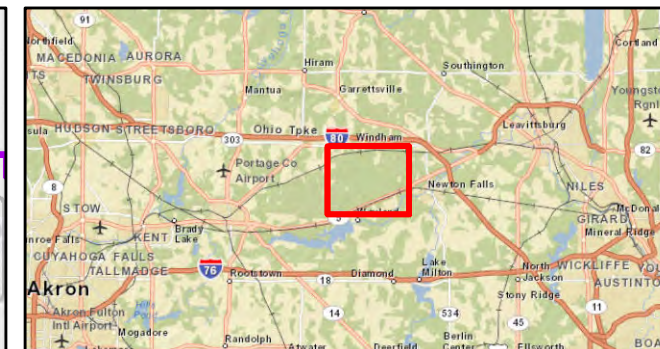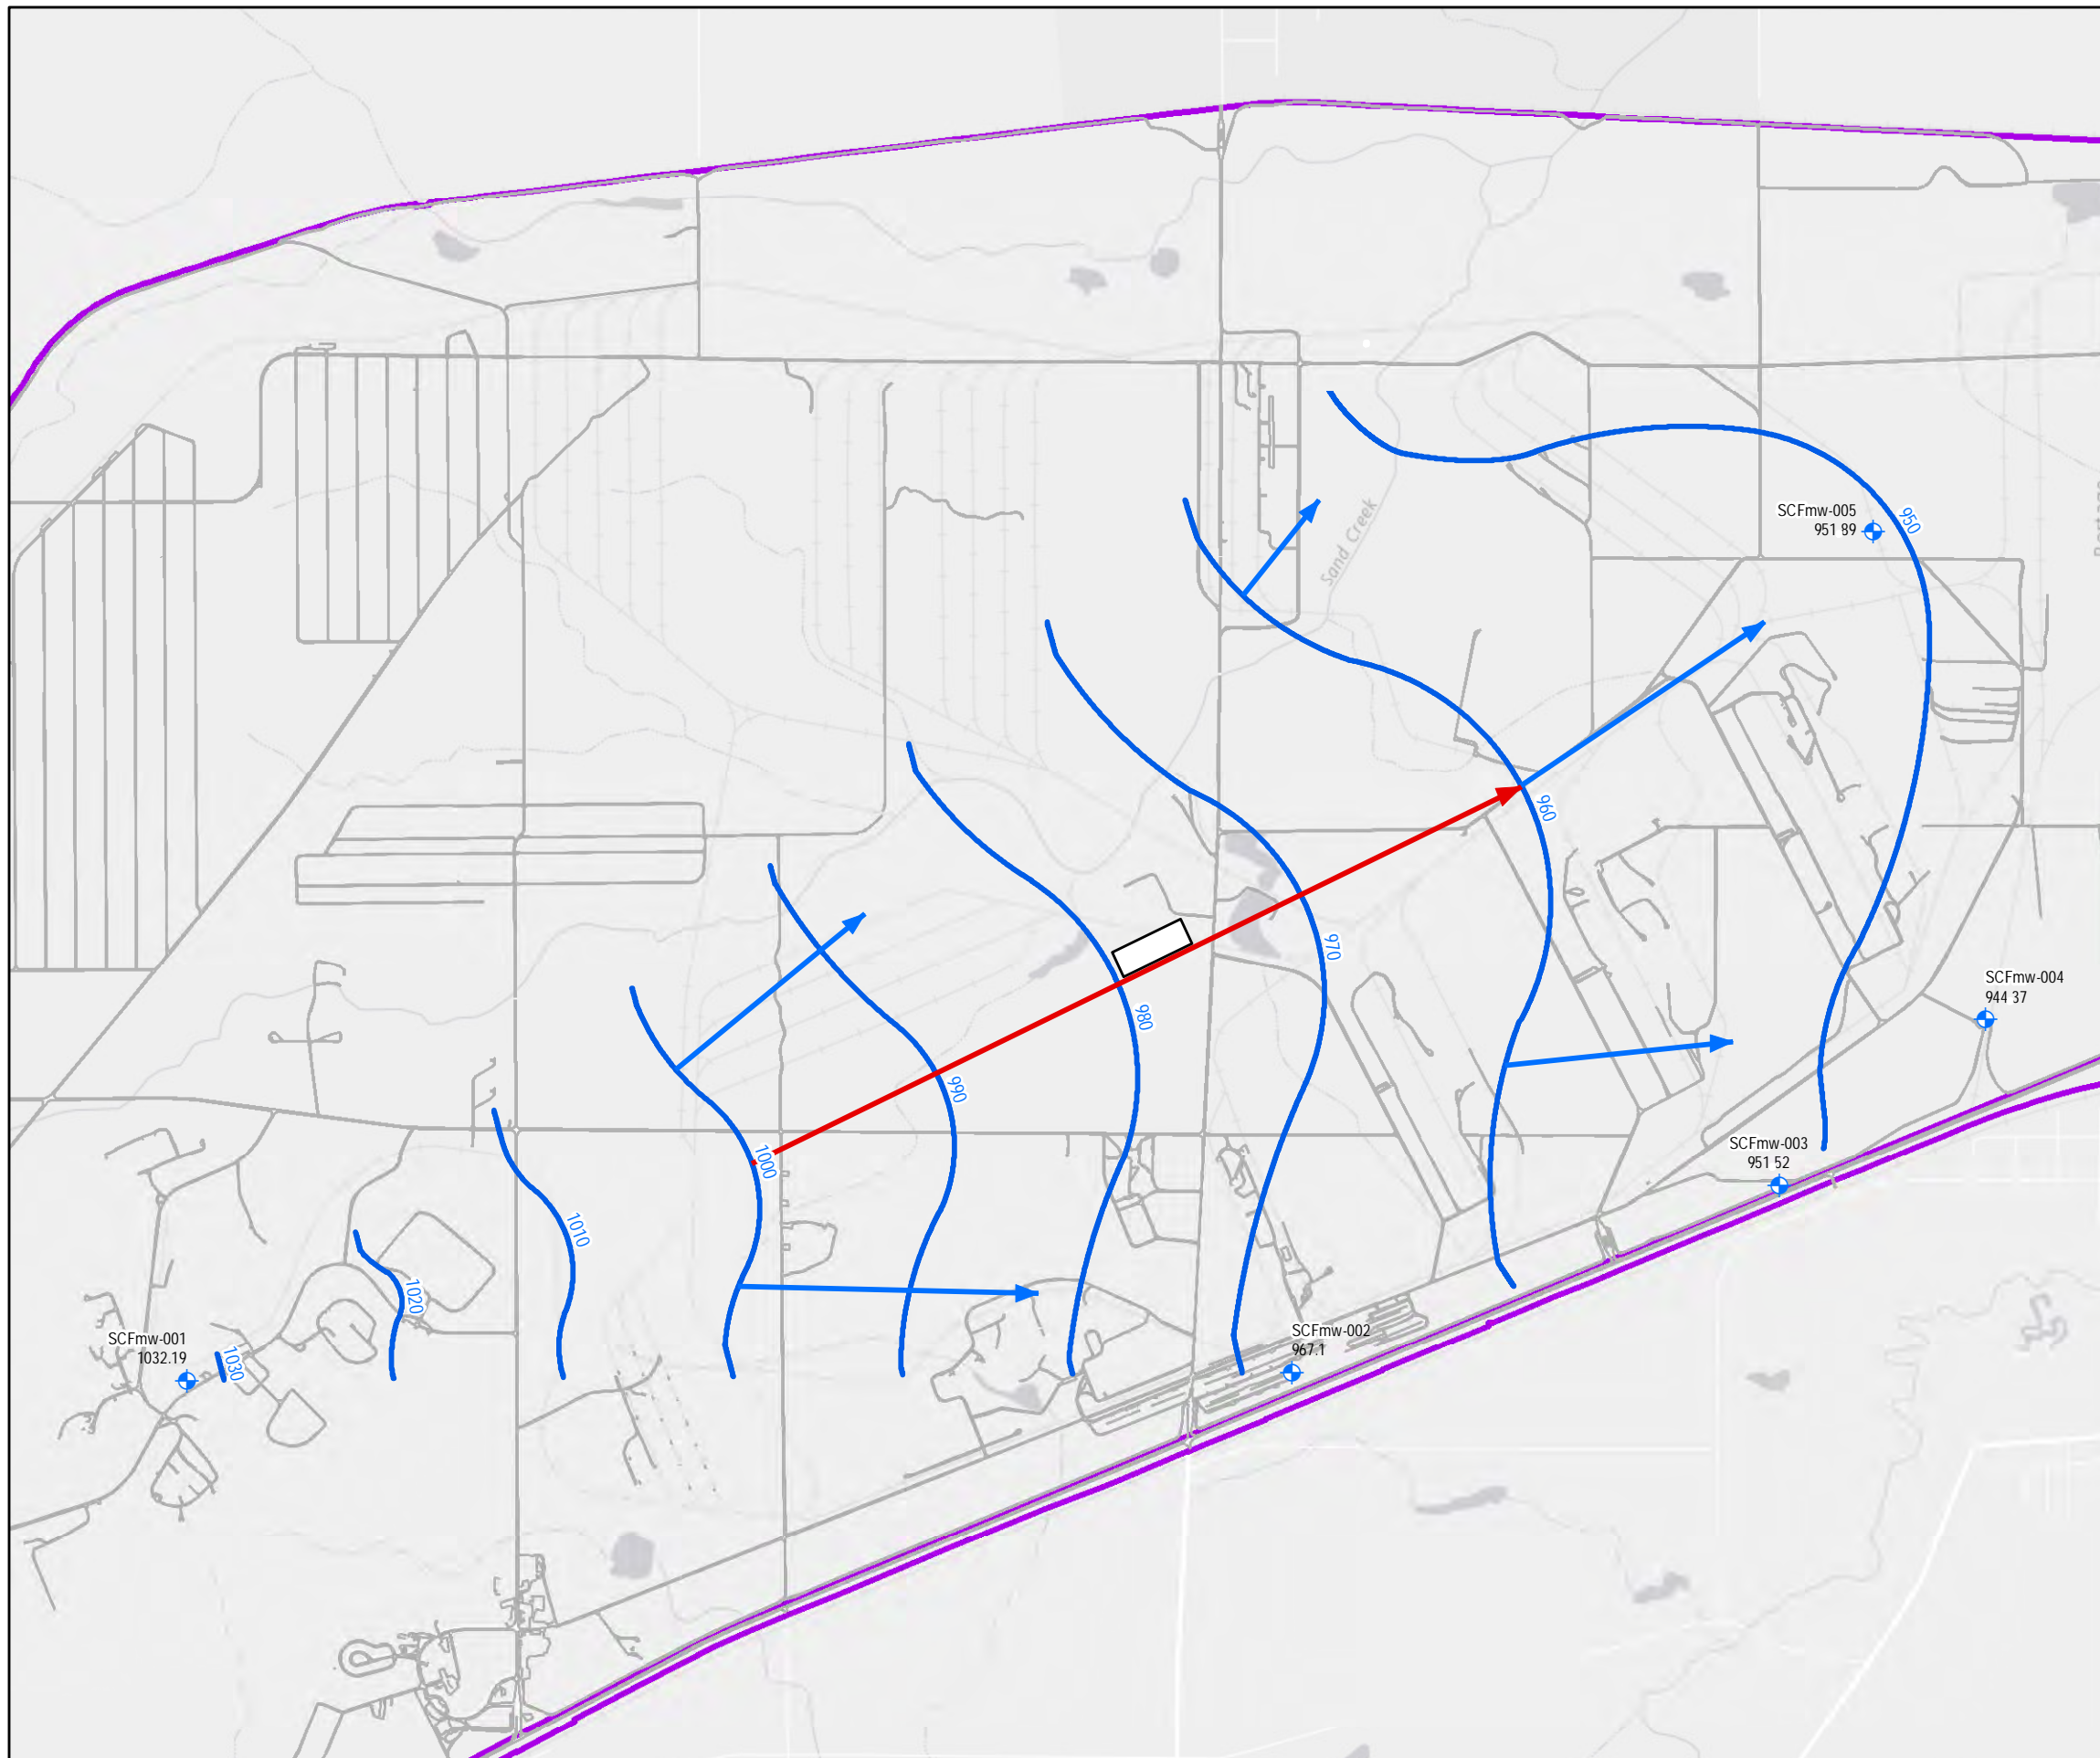


Legend

- ◆ Sharon Conglomerate Well Location
- Sharon Conglomerate Contours - 10ft Interval
- Direction Of Flow
- i1 = Hydraulic Gradient (ft/ft)
- Roads
- Camp Ravenna Property Line

Notes:

- Potentiometric Surfaces based on data collected in July 2015
- Basemap Sources: ESRI Map Services - Canvas/World_Light_Gray_Base and World_Street_Map
- Surface Elevation Contours - USDA



**POTENTIOMETRIC SURFACE MAP
LOWER SHARON (CONGLOMERATE) AQUIFER**
Groundwater and Environmental Investigation
Services for RVAAP-66 Facility-wide Groundwater
Former Ravenna Army Ammunition Plant
Ravenna, Ohio

Figure: 3-4
DRAFT

Table 2-1
Well Construction Details, Groundwater Elevations, and Depth to Bottom Measurements

RVAAP Area	Well ID	Ohio State Plane Easting	Ohio State Plane Northing	Ground Elevation (ft, AMSL)	Total Drilled Depth (ft, BGS)	TOC Elevation (ft, AMSL)	Well Head Type ¹	Monitored Zone	Top of Screen (ft, BGS)	Bottom of Screen (ft, BGS)	Bottom of Inner Casing Plug or End Cap (ft, BGS)	Stickup height (ft, AGS)	Reported Bottom of Inner Casing (ft, BTOC)	Depth to Water - March 2015 (ft, BTOC)	Groundwater Elevation - March 2015 (ft, AMSL)	Depth to Water - July 2015 (ft, BTOC)	Groundwater Elevation - July 2015 (ft, AMSL)	July 2015 Measured Bottom of Inner Casing (ft, BTOC)	Sediment Accumulation (ft) ²	Description of Bottom
Atlas Scrap Yard	ASYmw-001	2366260.85	558404.04	978.40	22.0	981.13	A	Sharon	11.0	21.0	21.0	2.73	23.7	nm	N/A	9.69	971.44	23.25	0.45	hard
	ASYmw-002	2366170.86	557887.86	982.00	20.0	985.24	A	Sharon	10.0	19.5	19.5	3.24	22.7	nm	N/A	12.48	972.76	23.11	0.00	hard
	ASYmw-003	2366651.49	558015.94	979.70	21.5	982.21	A	Sharon	11.0	21.0	21.0	2.51	23.5	nm	N/A	10.55	971.66	23.78	0.00	hard
	ASYmw-004	2367166.04	557640.81	977.10	27.8	979.66	A	Sharon	17.0	27.0	27.0	2.56	29.6	nm	N/A	7.51	972.15	29.95	0.00	hard
	ASYmw-005	2367448.16	557783.01	977.60	25.0	979.80	A	Sharon	14.0	24.0	24.0	2.20	26.2	nm	N/A	6.32	973.48	27.54	0.00	soft
	ASYmw-006	2366746.73	557257.72	980.20	27.0	983.01	A	Sharon	16.0	26.0	26.0	2.81	28.8	nm	N/A	12.29	970.72	29.10	0.00	hard
	ASYmw-007	2366834.49	556818.08	981.40	28.0	984.16	A	Unconsolidated	16.0	26.0	26.0	2.76	28.8	nm	N/A	13.80	970.36	29.21	0.00	
	ASYmw-008	2367475.07	557087.66	976.20	26.0	978.85	A	Unconsolidated	15.0	25.0	25.0	2.65	27.7	nm	N/A	4.02	974.83	27.58	0.12	hard
	ASYmw-009	2366631.94	557603.68	979.90	22.0	982.70	A	Sharon	11.5	21.5	21.5	2.80	24.3	nm	N/A	10.10	972.60	24.41	0.00	soft
	ASYmw-010	2366985.37	557270.61	978.20	28.0	981.05	A	Unconsolidated	17.0	27.0	27.0	2.85	29.8	nm	N/A	10.54	970.51	31.42	0.00	hard
Building 1200-Dilution/Settling Pond	B12mw-010	2371292.81	565827.43	1,002.72	21.0	1,005.92	A	Sharon	10.0	20.0	20.0	3.20	23.2	nm	N/A	13.14	992.78	22.84	0.36	hard
	B12mw-011	2371416.15	565687.82	1,003.76	24.7	1,006.70	A	Sharon	14.0	24.0	24.0	2.94	26.9	nm	N/A	14.44	992.26	26.70	0.20	hard
	B12mw-012	2371430.41	565828.01	1,003.43	22.3	1,006.32	A	Sharon	12.0	22.0	22.0	2.89	24.9	nm	N/A	13.29	993.03	24.80	0.10	hard
	B12mw-013	2371221.00	565904.00	1,001.80	22	1,004.48	A	Sharon	11.5	21.5	21.8	2.68	24.25	nm	N/A	15.95	988.53	24.20	0.05	hard
Background	BKGmw-004	2368852.97	569464.76	965.16	19.5	967.66	A	Unconsolidated	9.2	19.2	19.5	2.50	22.0	nm	N/A	13.04	954.62	22.29	0.00	hard
	BKGmw-005	2340835.86	562288.45	1,149.44	19.0	1,151.94	A	Unconsolidated	8.2	18.2	18.5	2.50	21.0	nm	N/A	11.09	1140.85	20.88	0.12	hard
	BKGmw-006	2358643.96	571910.47	1,026.38	35.1	1,028.88	A	Sharon	24.7	34.7	35.1	2.50	37.6	nm	N/A	23.04	1005.84	37.70	0.00	soft
	BKGmw-008	2372741.08	569654.23	970.40	25.0	972.90	A	Sharon	14.7	24.7	25.0	2.50	27.5	nm	N/A	14.34	958.56	27.44	0.06	hard
	BKGmw-010	2371372.86	565540.54	1,003.80	22.0	1,006.18	A	Sharon	8.9	18.9	19.2	2.38	21.6	nm	N/A	12.70	993.48	21.96	0.00	hard
	BKGmw-012	2367795.23	563918.86	997.57	59.8	1,000.07	A	Sharon	38.6	59.6	59.8	2.50	62.3	nm	N/A	7.78	992.29	62.05	0.25	hard
	BKGmw-013	2361627.39	558269.16	986.59	25.5	989.09	A	Unconsolidated	15.2	25.2	25.5	2.50	28.0	nm	N/A	11.52	977.57	28.08	0.00	hard
	BKGmw-015	2361482.22	569339.87	1,037.90	51.0	1,040.40	A	Sharon	30.1	50.1	50.4	2.50	52.9	nm	N/A	48.07	992.33	53.05	0.00	hard
	BKGmw-016	2342407.08	553983.50	1,098.42	19.0	1,100.92	A	Unconsolidated	8.4	18.5	18.6	2.50	21.1	nm	N/A	5.34	1095.58	21.15	0.00	hard
	BKGmw-017	2346115.35	562452.04	1,132.80	34.8	1,135.30	A	Unconsolidated	23.2	33.3	33.6	2.50	36.1	nm	N/A	17.35	1117.95	35.90	0.20	hard
	BKGmw-018	2354993.91	570873.35	1,043.06	24.7	1,045.56	A	Sharon	14.5	24.5	24.7	2.50	27.2	nm	N/A	15.57	1029.99	27.65	0.00	hard
	BKGmw-019	2349882.14	559864.55	1,108.24	34.0	1,110.74	A	Unconsolidated	23.0	33.0	33.2	2.50	35.7	nm	N/A	18.42	1092.32	35.61	0.09	hard
BKGmw-020	2357856.24	558756.24	1,065.00	30.7	1,067.50	A	Unconsolidated	20.5	30.5	30.7	2.50	33.2	nm	N/A	7.95	1059.55	33.19	0.01	hard	
BKGmw-021	2367622.95	571016.75	972.16	19.0	974.66	A	Unconsolidated	7.7	17.8	18.1	2.50	20.6	nm	N/A	13.66	961.00	21.46	0.00	hard	
C-Block Quarry	CBLmw-001	2343657.08	559403.12	1,178.50	50.0	1,181.08	A	Homewood	39.0	49.0	49.0	2.58	51.6	nm	N/A	39.74	1141.34	50.41	1.19	hard
	CBLmw-002	2343845.22	559044.48	1,172.50	45.3	1,175.24	A	Homewood	34.5	44.5	44.5	2.74	47.2	nm	N/A	34.29	1140.95	47.33	0.00	hard
	CBLmw-003	2343970.00	559695.52	1,172.22	44.0	1,175.06	A	Homewood	33.0	43.0	43.0	2.84	45.8	nm	N/A	31.33	1143.73	44.70	1.10	hard
	CBLmw-004	2343688.76	559951.58	1,172.08	45.0	1,174.84	A	Homewood	34.0	44.0	44.0	2.76	46.8	nm	N/A	32.48	1142.36	46.96	0.00	hard
	CBLmw-005	2344572.00	558686.00	1,155.60	31.0	1,158.10	A	Homewood	22.0	30.0	30.3	2.50	32.42	nm	N/A	23.10	1135.00	32.41	0.01	hard
Central Burn Pits	CBPmw-001	2367095.37	561616.01	972.71	32.3	975.84	A	Unconsolidated	21.8	31.8	31.8	3.13	34.9	nm	N/A	11.51	964.33	34.20	0.70	soft
	CBPmw-002	2367295.66	561865.83	967.33	30.0	970.04	A	Unconsolidated	19.5	29.5	29.5	2.71	32.2	nm	N/A	6.56	963.48	31.61	0.59	hard
	CBPmw-003	2366768.68	561944.14	972.04	25.0	974.67	A	Unconsolidated	14.5	24.5	24.5	2.63	27.1	nm	N/A	10.75	963.92	30.19	0.00	medium
	CBPmw-004	2366978.80	562123.80	968.58	27.5	971.13	A	Unconsolidated	17.0	27.0	27.0	2.55	29.5	nm	N/A	9.55	961.58	29.67	0.00	medium
	CBPmw-005	2366919.66	562311.88	968.83	25.0	971.59	A	Unconsolidated	14.5	24.5	24.5	2.76	27.3	nm	N/A	10.93	960.66	27.40	0.00	medium
	CBPmw-006	2367243.68	562311.87	965.01	23.0	967.64	A	Unconsolidated	12.5	22.5	22.5	2.63	25.1	nm	N/A	6.55	961.09	25.20	0.00	medium
	CBPmw-007	2366512.62	562006.41	973.47	30.0	976.37	A	Unconsolidated	19.5	29.5	29.5	2.90	32.4	nm	N/A	14.14	962.23	31.89	0.51	hard
	CBPmw-008	2366757.21	562668.84	970.57	25.5	973.19	A	Unconsolidated	15.0	25.0	25.0	2.62	27.6	nm	N/A	14.80	958.39	28.00	0.00	hard
	CBPmw-009	2367174.00	561797.00	969.90	65	972.48	A	Sharon	54.0	64.0	64.3	2.58	66.55	nm	N/A	8.85	963.63	66.62	0.00	medium
Upper and Lower Cobbbs Ponds	CPmw-001	2368948.81	560440.91	975.46	16.0	975.26														

Table 2-1
Well Construction Details, Groundwater Elevations, and Depth to Bottom Measurements

RVAAP Area	Well ID	Ohio State Plane Easting	Ohio State Plane Northing	Ground Elevation (ft, AMSL)	Total Drilled Depth (ft, BGS)	TOC Elevation (ft, AMSL)	Well Head Type ¹	Monitored Zone	Top of Screen (ft, BGS)	Bottom of Screen (ft, BGS)	Bottom of Inner Casing Plug or End Cap (ft, BGS)	Stickup height (ft, AGS)	Reported Bottom of Inner Casing (ft, BTOC)	Depth to Water - March 2015 (ft, BTOC)	Groundwater Elevation - March 2015 (ft, AMSL)	Depth to Water - July 2015 (ft, BTOC)	Groundwater Elevation - July 2015 (ft, AMSL)	July 2015 Measured Bottom of Inner Casing (ft, BTOC)	Sediment Accumulation (ft) ²	Description of Bottom
Erie Burning Grounds	EBGmw-123	2380049.21	571747.04	945.59	32.0	947.82	A	Unconsolidated	21.0	31.0	31.5	2.23	33.7	nm	N/A	10.50	937.32	34.78	0.00	hard
	EBGmw-124	2380030.24	571618.07	939.02	32.0	941.39	A	Unconsolidated	20.0	30.0	30.5	2.37	32.9	nm	N/A	4.29	937.10	32.63	0.27	medium
	EBGmw-125	2379679.20	571655.63	947.55	25.0	949.89	A	Unconsolidated	14.0	24.0	24.5	2.34	26.8	nm	N/A	13.15	936.74	27.41	0.00	hard
	EBGmw-126	2380307.31	572348.81	938.20	28.0	940.61	A	Unconsolidated	15.2	25.2	25.5	2.41	27.9	nm	N/A	2.39	938.22	27.70	0.20	medium
	EBGmw-127	2380172.16	571083.61	940.21	30.0	943.07	A	Unconsolidated	19.0	29.0	29.5	2.86	32.4	nm	N/A	4.64	938.43	32.83	0.00	hard
	EBGmw-128	2379892.79	570970.32	942.47	28.0	945.13	A	Unconsolidated	15.0	25.0	25.3	2.66	28.0	nm	N/A	7.02	938.11	28.21	0.00	hard
	EBGmw-129	2379240.52	572035.68	941.97	29.0	944.36	A	Unconsolidated	16.0	26.0	26.0	2.39	28.4	nm	N/A	5.84	938.52	30.96	0.00	medium
	EBGmw-130	2379220.69	570695.61	941.18	26.0	944.00	A	Unconsolidated	15.2	25.2	25.5	2.82	28.3	nm	N/A	6.78	937.22	28.39	0.00	hard
Fuze and Booster Quarry Landfill/Ponds	EBGmw-131	2379666.00	571655.00	947.50	71.0	950.08	A	Sharon	60.5	70.5	70.8	2.58	73.10	nm	N/A	9.07	941.01	23.41	49.69	hard
	FBQmw-166	2349584.33	553123.86	1,104.87	16.0	1,108.86	A	Unconsolidated	5.5	15.5	15.5	3.99	19.5	nm	N/A	4.32	1104.54	19.86	0.00	hard
	FBQmw-167	2349675.45	553556.12	1,112.05	18.0	1,115.90	A	Unconsolidated	5.0	15.0	15.0	3.85	18.9	nm	N/A	3.66	1112.24	19.09	0.00	hard
	FBQmw-168	2350066.87	553620.85	1,131.27	19.5	1,133.91	A	Homewood	9.0	19.0	19.0	2.64	21.6	nm	N/A	10.36	1123.55	21.26	0.34	medium
	FBQmw-169	2349730.90	553681.21	1,117.36	16.0	1,120.58	A	Homewood	5.0	15.0	15.0	3.22	18.2	nm	N/A	5.29	1115.29	18.91	0.00	hard
	FBQmw-170	2350102.41	553975.40	1,139.67	30.5	1,142.26	A	Homewood	20.0	30.0	30.0	2.59	32.6	nm	N/A	15.85	1126.41	32.75	0.00	hard
	FBQmw-171	2350072.44	554230.93	1,140.49	30.0	1,143.55	A	Homewood	18.0	28.0	28.0	3.06	31.1	nm	N/A	15.66	1127.89	31.46	0.00	hard
	FBQmw-172	2349907.37	554322.17	1,145.71	33.0	1,150.09	A	Homewood	20.0	30.0	30.0	4.38	34.4	nm	N/A	23.39	1126.70	20.03	14.37	medium
	FBQmw-173	2350449.01	554491.35	1,162.43	50.0	1,165.94	A	Homewood	29.5	49.5	49.5	3.51	53.0	nm	N/A	41.43	1124.51	53.03	0.00	hard
	FBQmw-174	2350289.81	554142.44	1,135.78	22.5	1,139.97	A	Homewood	12.0	22.0	22.0	4.19	26.2	16.02	1123.95	13.45	1126.52	23.08	3.12	medium
	FBQmw-175	2350297.98	553989.24	1,137.16	22.5	1,140.73	A	Homewood	12.0	22.0	22.0	3.57	25.6	nm	N/A	15.22	1125.51	25.81	0.00	medium
	FBQmw-176	2350219.45	553273.33	1,129.57	21.5	1,131.91	A	Unconsolidated	11.0	21.0	21.0	2.34	23.3	nm	N/A	7.63	1124.28	23.65	0.00	soft
FBQmw-177	2350112.18	553321.94	1,125.73	22.5	1,128.57	A	Homewood	12.0	22.0	22.0	2.84	24.8	nm	N/A	11.38	1117.19	24.74	0.06	soft	
Facility-Wide Groundwater	FWGmw-001	2368321.00	565739.00	953.60	17.5	956.62	A	Unconsolidated	7	17	17.3	3.02	20.05	nm	N/A	8.05	948.57	20.03	0.02	medium
	FWGmw-002	2367606.00	571015.00	970.60	71.0	973.10	A	Unconsolidated	57	67	67.3	2.50	70.05	23.09	950.01	22.75	950.35	69.61	0.44	soft
	FWGmw-003	2344042.00	563118.00	1,129.40	19.0	1,131.96	A	Unconsolidated	8.5	18.5	18.8	2.56	21.1	nm	N/A	4.68	1127.28	21.01	0.09	hard
	FWGmw-004	2356970.00	549319.00	1,034.50	20.0	1,037.15	A	Unconsolidated	9.5	19.5	19.8	2.65	22.6	11.36	1025.79	11.13	1026.02	22.54	0.06	soft
	FWGmw-005	2338973.00	558510.00	1,167.50	29.5	1,170.10	A	Homewood	19.25	29.25	29.55	2.60	31.9	nm	N/A	20.63	1149.47	31.65	0.25	soft
	FWGmw-006	2335421.00	553142.00	1,181.90	18.0	1,184.33	A	Unconsolidated	7.5	17.5	17.8	2.43	19.25	nm	N/A	4.03	1180.30	19.20	0.05	hard
	FWGmw-007	2344785.00	548356.00	1,072.80	30.0	1,075.41	A	Unconsolidated	19.5	29.5	29.8	2.61	32.35	22.72	1052.69	22.22	1053.19	32.18	0.17	hard
	FWGmw-008	2341569.00	555735.00	1,109.00	21.0	1,111.61	A	Unconsolidated	10	20	20.3	2.61	22.1	nm	N/A	4.94	1106.67	21.72	0.38	soft
	FWGmw-009	2341998.00	556784.00	1,099.50	18.5	1,102.14	A	Unconsolidated	8	18	18.3	2.64	20.4	nm	N/A	2.19	1099.95	20.31	0.09	hard
	FWGmw-010	2379060.00	565077.00	959.50	17.3	962.15	A	Unconsolidated	6	16	16.3	2.65	19.1	nm	N/A	9.21	952.94	19.12	0.00	hard
	FWGmw-011	2380390.00	566801.00	939.00	17.5	941.61	A	Unconsolidated	6	16	16.3	2.61	17.8	1.63	939.98	1.58	940.03	17.58	0.22	hard
	FWGmw-012	2380389.00	566790.00	938.90	40.0	941.39	A	Sharon Shale	29.5	39.5	39.8	2.49	42.45	0.00	941.39	0.15	941.24	42.41	0.04	hard
	FWGmw-013	2357460.00	559483.00	1,057.10	34.5	1,059.51	A	Sharon	24	34	34.3	2.41	36.7	nm	N/A	17.31	1042.20	37.24	0.00	hard
	FWGmw-014	2341064.00	560957.00	1,135.00	18.5	1,137.57	A	Unconsolidated	8.25	18.25	18.55	2.57	21.15	nm	N/A	3.18	1134.39	21.08	0.07	hard
	FWGmw-015	2358353.00	550179.00	1,012.10	26.0	1,014.51	A	Unconsolidated	13.5	23.5	23.8	2.41	26.35	4.28	1010.23	3.98	1010.53	26.26	0.09	medium
	FWGmw-016	2358364.00	550171.00	1,011.90	65.0	1,014.39	A	Sharon	54.5	64.5	64.8	2.49	67.5	16.54	997.85	15.49	998.90	67.50	0.00	hard
Load Line 1	LL1mw-063	2376841.36	563650.53	992.20	27.4	994.84	A	Sharon	17.1	27.1	27.4	2.64	30.0	nm	N/A	20.70	974.14	30.25	0.00	hard
	LL1mw-064	2380286.97	563118.74	932.32	18.4	935.10	A	Unconsolidated	8.0	18.0	18.4	2.78	21.1	1.42	933.68	0.50	934.60	21.21	0.00	soft
	LL1mw-065	2380452.00	560916.92	941.53	20.5	944.41	A	Unconsolidated	10.2	20.2	20.5	2.88	23.4	11.40	933.01	9.91	934.50	23.21	0.19	hard
	LL1mw-067	2376545.30	565201.14	977.55	22.8	980.36	A	Sharon	12.8	22.5	22.8	2.81	25.6	nm	N/A	14.44	965.92	26.10	0.00	hard
	LL1mw-078	2376275.85	564623.87	993.40	38.7															

Table 2-1
Well Construction Details, Groundwater Elevations, and Depth to Bottom Measurements

RVAAP Area	Well ID	Ohio State Plane Easting	Ohio State Plane Northing	Ground Elevation (ft, AMSL)	Total Drilled Depth (ft, BGS)	TOC Elevation (ft, AMSL)	Well Head Type ¹	Monitored Zone	Top of Screen (ft, BGS)	Bottom of Screen (ft, BGS)	Bottom of Inner Casing Plug or End Cap (ft, BGS)	Stickup height (ft, AGS)	Reported Bottom of Inner Casing (ft, BTOC)	Depth to Water - March 2015 (ft, BTOC)	Groundwater Elevation - March 2015 (ft, AMSL)	Depth to Water - July 2015 (ft, BTOC)	Groundwater Elevation - July 2015 (ft, AMSL)	July 2015 Measured Bottom of Inner Casing (ft, BTOC)	Sediment Accumulation (ft) ²	Description of Bottom
Load Line 3	LL3mw-232	2369862.96	561365.91	998.59	37.8	1,000.41	A	Sharon	26.8	36.8	37.0	1.82	38.8	nm	N/A	15.45	984.96	39.80	0.00	medium
	LL3mw-233	2369934.52	560750.41	1,002.47	31.1	1,004.36	A	Sharon	20.1	30.1	30.3	1.89	32.2	nm	N/A	22.87	981.49	31.69	0.51	soft
	LL3mw-234	2370297.47	560058.89	1,004.47	20.5	1,006.56	A	Sharon	9.8	19.8	20.0	2.09	22.1	nm	N/A	9.18	997.38	22.67	0.00	hard
	LL3mw-235	2370642.47	559812.63	1,008.05	21.2	1,009.94	A	Sharon	10.1	20.1	20.3	1.89	22.2	nm	N/A	15.09	994.85	22.99	0.00	hard
	LL3mw-236	2371178.58	559866.75	1,008.94	25.5	1,011.17	A	Sharon	13.8	23.8	24.0	2.23	26.2	nm	N/A	13.64	997.53	26.61	0.00	hard
	LL3mw-237	2371475.00	559328.09	1,003.57	23.9	1,005.57	A	Sharon	12.7	22.7	22.9	2.00	24.9	nm	N/A	13.00	992.57	25.57	0.00	hard
	LL3mw-238	2370625.34	559569.06	1,004.75	20.7	1,006.91	A	Sharon	10.5	20.5	20.7	2.16	22.9	14.84	992.07	14.86	992.05	23.39	0.00	hard
	LL3mw-239	2370895.01	559101.39	1,001.70	35.7	1,003.50	A	Sharon	24.9	34.9	35.0	1.80	36.8	nm	N/A	21.58	981.92	36.92	0.00	soft
	LL3mw-240	2371309.57	558204.34	1,005.60	35.5	1,007.52	A	Sharon	24.4	34.4	34.6	1.92	36.5	nm	N/A	26.62	980.90	36.68	0.00	medium
	LL3mw-241	2370332.80	559298.09	992.41	23.8	994.65	A	Sharon	12.7	22.7	22.9	2.24	25.1	9.90	984.75	7.50	987.15	25.59	0.00	hard
	LL3mw-242	2371993.30	557034.21	997.39	20.5	999.32	A	Sharon	9.8	19.8	20.0	1.93	21.9	nm	N/A	13.02	986.30	22.56	0.00	hard
	LL3mw-243	2371532.61	556688.92	989.36	24.5	991.16	A	Sharon	13.8	23.8	24.0	1.80	25.8	nm	N/A	10.58	980.58	26.39	0.00	hard
	LL3mw-244	2371456.00	556033.00	986.20	45	988.78	A	Sharon	34.5	44.5	44.8	2.58	47.25	7.29	981.49	8.60	980.18	46.88	0.37	hard
Load Line 4	LL3mw-245	2369249.00	558573.00	978.70	47	981.24	A	Sharon	36.5	46.5	46.8	2.54	48.9	nm	N/A	10.59	970.65	48.80	0.10	hard
	LL3mw-246	2371441.00	555969.00	986.50	43	988.84	A	Sharon	32.8	42.8	43.0	2.75	45.75	18.39	970.45	17.98	970.86	45.69	0.06	hard
	LL4mw-193	2364237.44	554959.74	980.88	21.9	982.92	A	Unconsolidated	11.3	21.3	21.5	2.04	23.5	nm	N/A	5.36	977.56	24.13	0.00	hard
	LL4mw-194	2364584.76	555088.18	981.87	22.0	983.76	A	Unconsolidated	11.3	21.3	21.5	1.89	23.4	nm	N/A	5.36	978.40	23.43	0.00	hard
	LL4mw-195	2365198.84	555045.69	980.83	21.0	982.59	A	Unconsolidated	10.3	20.3	20.5	1.76	22.3	nm	N/A	9.26	973.33	22.74	0.00	medium
	LL4mw-196	2365297.28	555212.59	982.56	20.0	984.55	A	Unconsolidated	9.2	19.2	19.4	1.99	21.4	nm	N/A	12.24	972.31	21.68	0.00	hard
	LL4mw-197	2365385.95	555396.55	983.79	21.7	985.46	A	Unconsolidated	10.8	20.8	21.0	1.67	22.7	nm	N/A	13.04	972.42	23.53	0.00	hard
	LL4mw-198	2364991.12	555440.99	981.61	22.0	983.42	A	Unconsolidated	10.3	20.3	20.5	1.81	22.3	nm	N/A	6.02	977.40	21.69	0.61	hard
	LL4mw-199	2365421.66	554621.06	975.20	22.0	977.28	A	Unconsolidated	10.3	20.3	20.5	2.08	22.6	nm	N/A	6.15	971.13	23.06	0.00	hard
	LL4mw-200	2365904.12	554579.72	985.97	23.5	987.93	A	Unconsolidated	12.6	22.6	23.0	1.96	25.0	nm	N/A	16.89	971.04	25.10	0.00	hard
Load Line 5	LL4mw-201	2365417.00	554607.00	975.90	67	978.02	A	Sharon	56.5	66.5	66.8		70.15	nm	N/A	9.59	968.43	69.89	0.26	hard
	LL5mw-001	2354625.07	554319.25	1,125.00	24.0	1,127.92	A	Homewood	14.0	24.0	24.0	2.92	26.9	nm	N/A	17.09	1110.83	27.03	0.00	hard
	LL5mw-002	2354571.52	554604.01	1,125.80	25.0	1,128.68	A	Homewood	15.0	25.0	25.0	2.88	27.9	nm	N/A	17.19	1111.49	27.53	0.37	hard
	LL5mw-003	2354964.47	554535.41	1,124.70	21.0	1,127.70	A	Unconsolidated	11.0	21.0	21.0	3.00	24.0	nm	N/A	15.55	1112.15	23.96	0.04	hard
	LL5mw-004	2355006.44	554073.73	1,122.90	22.4	1,125.81	A	Homewood	12.0	22.0	22.0	2.91	24.9	nm	N/A	14.95	1110.86	25.35	0.00	medium
	LL5mw-005	2354422.02	554152.73	1,126.50	27.8	1,129.42	A	Homewood	17.0	27.0	27.0	2.92	29.9	nm	N/A	18.59	1110.83	29.65	0.25	soft
Load Line 6	LL5mw-006	2354730.78	553984.82	1,125.10	24.5	1,128.00	A	Homewood	14.0	24.0	24.0	2.90	26.9	nm	N/A	17.02	1110.98	27.08	0.00	medium
	LL6mw-001	2353153.23	554214.84	NA	18.0	1,124.16	F	Unconsolidated	7.0	17.0	17.0	0.00	17.0	nm	N/A	9.46	1114.70	17.63	0.00	hard
	LL6mw-002	2353820.09	553589.88	NA	23.0	1,129.36	F	Unconsolidated	12.5	22.5	22.5	0.00	22.5	nm	N/A	17.65	1111.71	24.51	0.00	hard
	LL6mw-003	2353048.68	553544.34	NA	23.4	1,125.38	A	Homewood	12.5	22.5	22.5	3.35	25.9	nm	N/A	13.05	1112.33	25.66	0.24	soft
	LL6mw-004	2353368.79	553431.82	NA	23.0	1,125.39	A	Homewood	12.5	22.5	22.5	2.58	25.1	nm	N/A	14.33	1111.06	24.57	0.53	hard
	LL6mw-005	2353194.52	553170.76	NA	19.9	1,120.47	A	Homewood	9.5	19.5	19.5	2.96	22.5	nm	N/A	10.55	1109.92	22.05	0.45	soft
	LL6mw-006	2352419.15	553165.28	NA	20.0	1,124.37	A	Unconsolidated	7.0	17.0	17.0	0.00	17.0	nm	N/A	11.85	1112.52	nm	N/A	N/A
	LL6mw-007	2353354.89	552677.17	NA	20.0	1,115.62	F	Homewood	9.5	19.5	19.5	0.00	19.5	nm	N/A	3.82	1111.80	19.32	0.18	hard
	LL6mw-008	2353616.00	553154.00	1,121.30	17.8	1,124.15	A	Unconsolidated	7.2	17.2	17.5	2.85	20.20	nm	N/A	12.28	1111.87	20.15	0.05	hard
Load Line 7 Pink Waste Water Treatment	LL6mw-009	2353604.00	553149.00	1,121.40	39.5	1,123.75	A	Homewood	29	39	39.3	2.35	41.40	nm	N/A	11.94	1111.81	41.39	0.01	hard
	LL7mw-001	2352192.91	554925.77	1,126.90	30.0	1,129.64	A	Homewood	19.5	29.5	29.5	2.74	32.2	20.18	1109.46	17.85	1111.79	33.51	0.00	hard
	LL7mw-002	2351918.23	555126.55	1,126.70	26.5	1,129.55	A	Homewood	15.0	25.0	25.0	2.85	27.8	nm	N/A	13.08	1116.47	27.51	0.29	hard
	LL7mw-003	2352351.04	555417.04	1,118.23	31.5	1,120.84	A	Homewood	21.0	31.0	31.0	2.61	33.6	nm	N/A	8.83	1112.01	33.92	0.00	hard
	LL7mw-004	2352035.20	555581.14	1,123.30																

Table 2-1
Well Construction Details, Groundwater Elevations, and Depth to Bottom Measurements

		Ohio State Plane Easting	Ohio State Plane Northing	Ground Elevation (ft, AMSL)	Total Drilled Depth (ft, BGS)	TOC Elevation (ft, AMSL)	Well Head Type ¹			Top of Screen (ft, BGS)	Bottom of Screen (ft, BGS)	Bottom of Inner Casing Plug or End Cap (ft, BGS)	Stickup height (ft, AGS)	Reported Bottom of Inner Casing (ft, BTOC)	Depth to Water - March 2015 (ft, BTOC)	Groundwater Elevation - March 2015 (ft, AMSL)	Depth to Water - July 2015 (ft, BTOC)	Groundwater Elevation - July 2015 (ft, AMSL)	July 2015 Measured Bottom of Inner Casing (ft, BTOC)	Sediment Accumulation (ft) ²	Description of Bottom
Load Line 11	LL11mw-001	2352778.89	557505.03	1,097.46	23.0	1,100.16	A	Unconsolidated	11.4	21.4	21.4	2.70	24.1	nm	N/A	7.96	1092.20	23.69	0.41	hard	
	LL11mw-002	2353354.28	558310.52	1,080.29	20.0	1,080.00	F	Unconsolidated	6.3	16.3	16.3	-0.29	16.0	nm	N/A	1.42	1078.58	16.49	0.00	hard	
	LL11mw-003	2352737.87	557999.62	1,088.45	17.0	1,088.48	F	Unconsolidated	5.9	15.9	15.9	0.03	15.9	nm	N/A	0.25	1088.23	16.11	0.00	medium	
	LL11mw-004	2352737.24	558164.36	1,084.60	17.0	1,084.72	F	Unconsolidated	6.1	16.1	16.1	0.12	16.2	nm	N/A	-0.08	1084.80	16.25	0.00	hard	
	LL11mw-005	2352847.56	558501.02	1,079.60	17.0	1,079.40	F	Unconsolidated	6.2	16.2	16.2	-0.20	16.0	nm	N/A	5.12	1074.28	16.44	0.00	hard	
	LL11mw-006	2352521.36	558263.28	1,086.61	17.0	1,086.50	F	Unconsolidated	5.6	15.6	15.6	-0.11	15.5	nm	N/A	2.74	1083.76	15.71	0.00	hard	
	LL11mw-007	2352094.81	558189.71	1,079.22	23.0	1,082.00	A	Unconsolidated	12.4	22.4	22.4	2.78	25.2	nm	N/A	14.45	1067.55	25.64	0.00	medium	
	LL11mw-008	2352388.60	557981.17	1,087.90	17.0	1,087.74	F	Unconsolidated	5.6	15.6	15.6	-0.16	15.4	nm	N/A	0.08	1087.66	15.74	0.00	hard	
	LL11mw-009	2352577.18	557901.18	1,088.38	17.0	1,091.54	F	Unconsolidated	6.7	16.7	16.7	-0.10	16.6	nm	N/A	1.71	1089.83	19.55	0.00	hard	
	LL11mw-010	2352039.00	557675.43	1,080.22	22.0	1,082.68	A	Unconsolidated	10.9	20.9	20.9	2.46	23.4	nm	N/A	3.34	1079.34	23.54	0.00	hard	
	LL11mw-011	2351119.00	558680.00	1,077.40	18.5	1,080.20	A	Unconsolidated	7.8	17.8	18.1	2.80	20.45	nm	N/A	7.06	1073.14	20.43	0.02	hard	
	LL11mw-012	2351125.00	558691.00	1,077.90	115.0	1,080.36	A	Sharon Shale	104.5	114.5	114.8	2.46	119.45	nm	N/A	18.59	1061.77	119.31	0.14	medium	
Load Line 12	LL12mw-088	2368667.75	556393.79	978.94	29.0	981.06	A	Unconsolidated	14.8	24.8	25.0	2.12	27.1	nm	N/A	5.11	975.95	27.38	0.00	hard	
	LL12mw-107	2368595.67	556759.02	978.03	33.0	980.15	A	Unconsolidated	20.7	30.7	31.0	2.12	33.1	nm	N/A	6.79	973.36	33.66	0.00	hard	
	LL12mw-113	2368223.73	558345.37	977.67	23.0	980.18	A	Sharon Shale	12.3	22.3	22.5	2.51	25.0	nm	N/A	4.81	975.37	20.70	4.30	hard	
	LL12mw-128	2368293.20	557371.54	976.21	34.0	978.24	A	Unconsolidated	21.1	31.1	31.3	2.03	33.3	nm	N/A	7.60	970.64	33.93	0.00	hard	
	LL12mw-153	2368138.87	557823.23	975.34	26.0	977.85	A	Unconsolidated	12.3	22.3	22.5	2.51	25.0	nm	N/A	4.69	973.16	25.03	0.00	hard	
	LL12mw-154	2368183.88	557754.56	977.00	29.0	979.06	A	Unconsolidated	16.4	26.4	26.6	2.06	28.7	nm	N/A	6.78	972.28	28.81	0.00	hard	
	LL12mw-182	2368853.20	555890.35	982.20	36.1	984.42	A	Unconsolidated	25.2	35.2	35.5	2.22	37.7	nm	N/A	7.88	976.54	38.04	0.00	hard	
	LL12mw-182ss	2368867.00	555897.00	982.30	36	985.02	A	Unconsolidated	25.25	35.25	35.55	2.72	38.5	nm	N/A	8.00	977.02	37.40	1.10	hard	
	LL12mw-183	2369224.36	556068.15	980.59	36.0	982.98	A	Sharon Shale	23.3	33.3	33.6	2.39	36.0	nm	N/A	10.26	972.72	36.30	0.00	hard	
	LL12mw-184	2368997.48	556399.46	980.96	29.5	983.16	A	Unconsolidated	18.8	28.8	29.0	2.20	31.2	nm	N/A	10.51	972.65	31.38	0.00	hard	
	LL12mw-185	2368829.86	556946.75	979.09	24.0	981.31	A	Unconsolidated	10.8	20.8	21.0	2.22	23.2	7.33	973.98	5.50	975.81	23.23	0.00	hard	
	LL12mw-186	2367912.39	559065.95	976.34	23.0	978.31	A	Sharon Shale	8.8	18.8	19.0	1.97	21.0	nm	N/A	5.00	973.31	21.00	0.00	hard	
	LL12mw-187	2368524.14	557633.10	977.90	29.0	979.94	A	Unconsolidated	17.2	27.2	27.4	2.04	29.4	8.96	970.98	7.29	972.65	29.89	0.00	hard	
	LL12mw-188	2367908.82	558132.59	978.46	20.5	980.63	A	Unconsolidated	9.8	19.8	20.0	2.17	22.2	nm	N/A	3.91	976.72	22.01	0.19	hard	
	LL12mw-189	2367945.92	558569.27	976.17	18.5	978.04	A	Sharon Shale	7.5	17.5	17.7	1.87	19.6	nm	N/A	3.54	974.50	19.51	0.09	hard	
	LL12mw-242	2368545.29	558020.51	978.40	26.3	981.20	A	Unconsolidated	15.5	25.5	25.5	2.80	28.3	7.89	973.31	6.94	974.26	28.54	0.00	hard	
	LL12mw-243	2368190.04	557376.32	978.10	24.0	980.79	A	Unconsolidated	13.0	23.0	23.0	2.69	25.7	nm	N/A	7.29	973.50	24.28	1.42	hard	
	LL12mw-244	2368751.42	557377.17	978.10	30.0	980.65	A	Unconsolidated	19.5	29.5	29.5	2.55	32.1	nm	N/A	9.69	970.96	30.59	1.51	hard	
	LL12mw-245	2368370.74	557044.55	977.50	29.0	980.04	A	Unconsolidated	18.0	28.0	28.0	2.54	30.5	7.33	972.71	6.07	973.97	29.75	0.75	hard	
	LL12mw-246	2369432.17	556658.89	982.00	32.0	984.83	A	Unconsolidated	21.5	31.5	31.5	2.83	34.3	nm	N/A	14.08	970.75	35.00	0.00	hard	
	LL12mw-247	2368932.00	555141.00	981.30	20.5	984.25	A	Unconsolidated	10	20	20.3	2.95	22.6	4.44	979.81	4.08	980.17	22.58	0.02	medium	
Landfill North of Winklepeck Burning Grounds	LNWmw-024	2358403.21	564825.89	1,035.30	24.0	1,038.00	A	Unconsolidated	10.0	20.0	20.0	2.70	22.7	nm	N/A	10.44	1027.56	22.49	0.21	hard	
	LNWmw-025	2358417.06	565071.92	1,027.20	19.0	1,029.13	A	Unconsolidated	8.0	18.0	18.0	1.93	19.9	nm	N/A	3.33	1025.80	20.29	0.00	hard	
	LNWmw-026	2358952.24	564658.16	1,025.00	24.0	1,027.80	A	Unconsolidated	13.0	23.0	23.0	2.80	25.8	nm	N/A	3.85	1023.95	25.95	0.00	hard	
	LNWmw-027	2358628.75	564517.41	1,024.40	25.0	1,027.13	A	Unconsolidated	14.0	24.0	24.0	2.73	26.7	nm	N/A	5.49	1021.64	26.85	0.00	hard	
Suspected Mustard Agent Burial Site	MBS-001	2345323.00	550759.50	1,079.68	30.0	1,082.20	A	Unconsolidated	19	28.7	29	2.52	31.5	nm	N/A	16.60	1065.60	30.98	0.52	hard	
	MBS-002	2345322.30	550886.20	1,080.50	30.0	1,083.22	A	Unconsolidated	18	27.3	28	2.72	30.7	nm	N/A	17.11	1066.11	31.10	0.00	hard	
	MBS-003	2345172.40	550922.80	1,082.45	30.0	1,084.45	A	Unconsolidated	18.5	28.2	28.5	2.00	30.5	nm	N/A	16.79	1067.66	30.69	0.00	hard	
	M																				

Table 2-1
Well Construction Details, Groundwater Elevations, and Depth to Bottom Measurements

RVAAP Area	Well ID	Ohio State Plane Easting	Ohio State Plane Northing	Ground Elevation (ft, AMSL)	Total Drilled Depth (ft, BGS)	TOC Elevation (ft, AMSL)	Well Head Type ¹	Monitored Zone	Top of Screen (ft, BGS)	Bottom of Screen (ft, BGS)	Bottom of Inner Casing Plug or End Cap (ft, BGS)	Stickup height (ft, AGS)	Reported Bottom of Inner Casing (ft, BTOC)	Depth to Water - March 2015 (ft, BTOC)	Groundwater Elevation - March 2015 (ft, AMSL)	Depth to Water - July 2015 (ft, BTOC)	Groundwater Elevation - July 2015 (ft, AMSL)	July 2015 Measured Bottom of Inner Casing (ft, BTOC)	Sediment Accumulation (ft) ²	Description of Bottom
Sharon Conglomerate	SCFmw-001	2353178.98	554768.62	1,118.53	230	1,120.71	A	Sharon Cong.	201	211	NA	2.18	213.61	nm	N/A	88.52	1032.19	214.30	0.00	hard
	SCFmw-002	2368927.36	555152.38	982.28	153	984.56	A	Sharon Cong.	137	147	NA	2.28	149.65	18.84	965.72	17.46	967.10	150.05	0.00	medium
	SCFmw-003	2375843.20	557957.67	956.14	140	958.47	A	Sharon Cong.	125.5	135.5	NA	2.33	139.65	nm	N/A	6.95	951.52	140.00	0.00	hard
	SCFmw-004	2378730.23	560361.03	941.87	120	944.17	A	Sharon Cong.	100	110	NA	2.30	112.47	-0.20	944.37	-0.20	944.37	112.50	0.00	medium
	SCFmw-005	2377014.05	567302.35	958.43	160	960.80	A	Sharon Cong.	139	154	NA	2.37	156.41	nm	N/A	8.91	951.89	156.35	0.06	hard
	SCFmw-006	2369394.54	569583.41	963.69	90	965.92	A	Sharon Cong.	76	86	NA	2.23	88.32	nm	N/A	17.25	948.67	88.34	0.00	medium
Winklepeck Burning Grounds	WBGmw-005	2357163.55	563037.18	1,052.20	19.0	1,054.70	A	Unconsolidated	8.3	18.3	18.6	2.50	21.1	nm	N/A	4.56	1050.14	21.41	0.00	hard
	WBGmw-006	2359087.79	563008.87	1,012.16	19.0	1,014.66	A	Unconsolidated	7.6	17.6	17.9	2.50	20.4	5.69	1008.97	5.64	1009.02	20.24	0.16	hard
	WBGmw-007	2360420.44	562479.87	998.09	24.0	1,000.59	A	Unconsolidated	13.5	23.5	23.8	2.50	26.3	nm	N/A	16.33	984.26	26.69	0.00	hard
	WBGmw-008	2359700.57	562010.35	1,005.71	18.5	1,008.21	A	Unconsolidated	8.1	18.2	18.5	2.50	21.0	nm	N/A	13.91	994.30	21.09	0.00	hard
	WBGmw-009	2357159.20	561603.54	1,045.03	24.0	1,047.53	A	Unconsolidated	11.4	21.4	21.5	2.50	24.0	11.51	1036.02	10.80	1036.73	24.55	0.00	medium
	WBGmw-010	2356051.96	562893.20	1,067.10	21.0	1,069.85	A	Unconsolidated	10.5	20.5	20.8	2.75	23.6	nm	N/A	6.76	1063.09	23.65	0.00	hard
	WBGmw-011	2356187.29	562609.18	1,069.70	22.0	1,072.38	A	Unconsolidated	11.0	21.0	21.3	2.68	24.0	nm	N/A	9.52	1062.86	24.23	0.00	medium
	WBGmw-012	2354810.65	562240.90	1,076.50	30.0	1,079.11	A	Unconsolidated	19.0	29.0	29.4	2.61	32.0	nm	N/A	15.19	1063.92	31.82	0.18	hard
	WBGmw-013	2355223.25	561518.27	1,069.10	22.0	1,071.70	A	Unconsolidated	11.0	21.0	21.3	2.60	23.9	nm	N/A	9.62	1062.08	24.32	0.00	
	WBGmw-014	2360439.22	562061.26	994.10	23.0	996.78	A	Unconsolidated	12.0	22.0	22.3	2.68	25.0	nm	N/A	15.40	981.38	25.14	0.00	
	WBGmw-015	2359182.41	562340.12	1,009.10	22.0	1,011.60	A	Unconsolidated	11.0	21.0	21.3	2.50	23.8	nm	N/A	11.24	1000.36	23.75	0.05	hard
	WBGmw-016	2360645.88	562709.13	994.90	24.0	997.03	A	Unconsolidated	13.0	23.0	23.3	2.13	25.4	nm	N/A	16.04	980.99	25.32	0.08	hard
	WBGmw-017	2359603.84	562913.24	1,004.00	22.0	1,006.62	A	Unconsolidated	11.0	21.0	21.3	2.62	23.9	nm	N/A	7.28	999.34	23.59	0.31	hard
	WBGmw-018	2361302.00	562659.00	990.50	24.0	991.45	A	Unconsolidated	13.5	23.5	23.8	0.95	24.8	nm	N/A	14.53	976.92	25.21	0.00	hard
	WBGmw-019	2361304.00	562645.00	989.30	50.0	990.25	A	Sharon	39.55	49.55	49.85	0.95	50.5	nm	N/A	16.53	973.72	51.36	0.00	medium
	WBGmw-020	2357161.00	561623.00	1,043.40	43.3	1,044.31	A	Sharon	32.9	42.9	43.2	0.91	43.8	11.25	1033.06	10.94	1033.37	44.27	0.00	medium
	WBGmw-021	2359106.00	563009.00	1,010.00	42.5	1,010.92	A	Sharon	32	42	42.3	0.92	43.1	8.28	1002.64	7.91	1003.01	43.66	0.00	hard

Notes and Abbreviations:

¹ A = above grade completion; F = flush-mount completion

² Sediment accumulation is based on historical construction depths that may not be accurate; only positive sediment accumulation is presented.

Sediment accumulation values with gray-shading and bold font identify a calculated sediment thickness greater than 0.20 feet, with a "soft" or "medium" bottom description.

AGS = above ground surface

ASML - above mean sea level

BGS = below ground surface

BTOC - below top of casing

ft - feet

N/A - not applicable

nm - not measured

TOC - top of casing

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
Common Anions	16887-00-6	Chloride				---
Common Anions	14797-55-8	Nitrate	10000	10000	3200	10000
Common Anions	N599	Nitrate/Nitrite (NO3/NO2-N)				---
Common Anions	14808-79-8	Sulfate				---
Common Anions	18496-25-8	Sulfide				---
Common Anions	14265-45-3	Sulfite				---
Explosives	99-35-4	1,3,5-Trinitrobenzene (Explosive)			59	59
Explosives	99-65-0	1,3-Dinitrobenzene (Explosive)	0.104		0.2	0.104
Explosives	118-96-7	2,4,6-Trinitrotoluene (Explosive)	0.521		0.98	0.521
Explosives	121-14-2	2,4-Dinitrotoluene (Explosive)	0.12		0.24	0.12
Explosives	606-20-2	2,6-Dinitrotoluene (Explosive)	0.122		0.049	0.122
Explosives	35572-78-2	2-Amino-4,6-Dinitrotoluene (Explosive)	0.209		3.9	0.209
Explosives	88-72-2	2-Nitrotoluene (Explosive)	0.37		0.31	0.37
Explosives	99-08-1	3-Nitrotoluene (Explosive)			0.17	0.17
Explosives	19406-51-0	4-Amino-2,6-Dinitrotoluene (Explosive)	0.209		3.9	0.209
Explosives	99-99-0	4-Nitrotoluene (Explosive)	5.01		4.3	5.01
Explosives	80251-29-2	DNX (Explosive)				---
Explosives	2691-41-0	HMX (Explosive)			100	100
Explosives	5755-27-1	MXN (Explosive)				---
Explosives	98-95-3	Nitrobenzene (Explosive)	0.521		0.14	0.521
Explosives	9004-70-0	Nitrocellulose (Explosive)			6000000	6000000
Explosives	55-63-0	Nitroglycerin (Explosive)	5.01		0.2	5.01
Explosives	556-88-7	Nitroguanidine (Explosive)			200	200
Explosives	78-11-5	PETN (Explosive)			3.9	3.9
Explosives	121-82-4	RDX (Explosive)	0.774		0.7	0.774
Explosives	479-45-8	Tetryl (Explosive)			3.9	3.9
Explosives	13980-04-6	TNX (Explosive)				---
Herbicides	93-76-5	2,4,5-T			16	16
Herbicides	94-75-7	2,4-D		70	17	17
Herbicides	88-85-7	Dinoseb		7	1.5	1.5
Herbicides	93-72-1	Silvex		50	11	11
Metals	7429-90-5	Aluminum			2000	2000
Metals	7440-36-0	Antimony		6	0.78	0.78
Metals	7440-38-2	Arsenic		10	0.052	0.052
Metals	7440-39-3	Barium		2000	380	380
Metals	7440-41-7	Beryllium		4	2.5	2.5
Metals	7440-43-9	Cadmium		5	0.92	0.92
Metals	7440-70-2	Calcium				---
Metals	7440-47-3	Chromium		100		---
Metals	7440-48-4	Cobalt			0.6	0.6
Metals	7440-50-8	Copper		1300	80	80
Metals	7439-89-6	Iron			1400	1400
Metals	7439-92-1	Lead		15	15	15
Metals	7439-95-4	Magnesium				---
Metals	7439-96-5	Manganese			43	43
Metals	7439-97-6	Mercury		2	0.063	0.063
Metals	7440-02-0	Nickel			39	39
Metals	7440-09-7	Potassium				---
Metals	7782-49-2	Selenium		50	10	10

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
Metals	7440-22-4	Silver			9.4	9.4
Metals	7440-23-5	Sodium				---
Metals	7440-28-0	Thallium		2	0.02	0.02
Metals	7440-29-1	Thorium				---
Metals	7440-31-5	Tin			1200	1200
Metals	7440-61-1	Uranium (inorg)				---
Metals	7440-62-2	Vanadium			8.6	8.6
Metals	7440-66-6	Zinc			600	600
Miscellaneous	57-14-7	1,1-Dimethylhydrazine (UDMH)			0.00042	0.00042
Miscellaneous	505-29-3	1,4-Dithiane			20	20
Miscellaneous	15980-15-1	1,4-Oxathiane				---
Miscellaneous	N33	Alkalinity				---
Miscellaneous	7664-41-7	Ammonia				---
Miscellaneous	N179	Chemical Oxygen Demand				---
Miscellaneous	18540-29-9	Chromium, hexavalent			0.035	0.035
Miscellaneous	124-38-9	CO2				---
Miscellaneous	N237	Conductivity				---
Miscellaneous	57-12-5	Cyanide		200	0.15	0.15
Miscellaneous	302-01-2	Hydrazine			0.0011	0.0011
Miscellaneous	N522	Kjeldahl Nitrogen				---
Miscellaneous	74-82-8	Methane				---
Miscellaneous	67-56-1	Methanol			2000	2000
Miscellaneous	14797-73-0	Perchlorate			1.4	1.4
Miscellaneous	N704	pH				---
Miscellaneous	64743-03-9	Phenols (misc)				---
Miscellaneous	111-48-8	Thiodiglycol			140	140
Miscellaneous	N340	Total Dissolved Solids				---
Miscellaneous	N997	Total Organic Carbon				---
Miscellaneous	7723-14-0	Total Phosphorus as P			0.04	0.04
Miscellaneous	NS791	TPH - Diesel Range Organics (misc)				---
Miscellaneous	NS834	TPH - Gasoline Range Organics (misc)				---
PCBs	12674-11-2	PCB-1016			0.14	0.14
PCBs	11104-28-2	PCB-1221			0.0047	0.0047
PCBs	11141-16-5	PCB-1232			0.0047	0.0047
PCBs	53469-21-9	PCB-1242	0.213		0.0078	0.213
PCBs	12672-29-6	PCB-1248			0.0078	0.0078
PCBs	11097-69-1	PCB-1254	0.021		0.0078	0.021
PCBs	11096-82-5	PCB-1260	0.213		0.0078	0.213
Pesticides	72-54-8	4,4'-DDD	0.059		0.032	0.059
Pesticides	72-55-9	4,4'-DDE	0.047		0.046	0.047
Pesticides	50-29-3	4,4'-DDT	0.027		0.23	0.027
Pesticides	309-00-2	Aldrin	0.005		0.00092	0.005
Pesticides	319-84-6	alpha-BHC	0.014		0.0072	0.014
Pesticides	5103-71-9	alpha-Chlordane				---
Pesticides	319-85-7	beta-BHC	0.047		0.025	0.047
Pesticides	57-74-9	Chlordane		2	0.045	0.045
Pesticides	319-86-8	delta-BHC				---
Pesticides	60-57-1	Dieldrin	0.004		0.0018	0.004
Pesticides	959-98-8	Endosulfan I				---
Pesticides	33213-65-9	Endosulfan II				---
Pesticides	1031-07-8	Endosulfan sulfate				---

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
Pesticides	72-20-8	Endrin		2	0.23	0.23
Pesticides	7421-93-4	Endrin aldehyde				---
Pesticides	53494-70-5	Endrin ketone				---
Pesticides	5103-74-2	gamma-Chlordane				---
Pesticides	76-44-8	Heptachlor	0.4	0.4	0.0014	0.4
Pesticides	1024-57-3	Heptachlor epoxide	0.2	0.2	0.0014	0.2
Pesticides	465-73-6	Isodrin				---
Pesticides	143-50-0	Kepone			0.0035	0.0035
Pesticides	58-89-9	Lindane	0.2	0.2	0.042	0.2
Pesticides	72-43-5	Methoxychlor		40	3.7	3.7
Pesticides	298-00-0	Methyl parathion			0.45	0.45
Pesticides	56-38-2	Parathion			8.6	8.6
Pesticides	8001-35-2	Toxaphene	3	3	0.071	3
Radiological	14952-40-0	Actinium-227				---
Radiological	14331-83-0	Actinium-228				---
Radiological	12587-46-1	Alpha activity				---
Radiological	12587-47-2	Beta activity				---
Radiological	14913-49-6	Bismuth-212				---
Radiological	14733-03-0	Bismuth-214				---
Radiological	10045-97-3	Cesium-137				---
Radiological	14255-04-0	Lead-210				---
Radiological	15092-94-1	Lead-212				---
Radiological	15067-28-4	Lead-214				---
Radiological	13966-00-2	Potassium-40				---
Radiological	14331-85-2	Protactinium-231				---
Radiological	7440-14-4	Radium				---
Radiological	13982-63-3	Radium-226				---
Radiological	15262-20-1	Radium-228				---
Radiological	14913-50-9	Thallium-208				---
Radiological	15065-10-8	Thorium-234				---
Radiological	7440-61-1	Uranium				---
Radiological	15117-96-1	Uranium-235				---
Radiological	24678-82-8	Uranium-238				---
SVOCs	92-52-4	1,1-Biphenyl			0.083	0.083
SVOCs	95-94-3	1,2,4,5-Tetrachlorobenzene			0.17	0.17
SVOCs	120-82-1	1,2,4-Trichlorobenzene (SVOC)		70	0.4	0.4
SVOCs	95-50-1	1,2-Dichlorobenzene (SVOC)		600	30	30
SVOCs	99-35-4	1,3,5-Trinitrobenzene (SVOC)			59	59
SVOCs	541-73-1	1,3-Dichlorobenzene (SVOC)				---
SVOCs	99-65-0	1,3-Dinitrobenzene	0.104		0.2	0.104
SVOCs	106-46-7	1,4-Dichlorobenzene (SVOC)		75	0.48	0.48
SVOCs	130-15-4	1,4-Naphthoquinone				---
SVOCs	134-32-7	1-Naphthalenamine				---
SVOCs	58-90-2	2,3,4,6-Tetrachlorophenol			24	24
SVOCs	95-95-4	2,4,5-Trichlorophenol			120	120
SVOCs	88-06-2	2,4,6-Trichlorophenol			1.2	1.2
SVOCs	120-83-2	2,4-Dichlorophenol			4.6	4.6
SVOCs	105-67-9	2,4-Dimethylphenol			36	36
SVOCs	51-28-5	2,4-Dinitrophenol			3.9	3.9
SVOCs	121-14-2	2,4-Dinitrotoluene	0.12		0.24	0.12
SVOCs	87-65-0	2,6-Dichlorophenol				---

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
SVOCs	606-20-2	2,6-Dinitrotoluene	0.122		0.049	0.122
SVOCs	53-96-3	2-Acetylaminofluorene			0.016	0.016
SVOCs	91-58-7	2-Chloronaphthalene			75	75
SVOCs	95-57-8	2-Chlorophenol			9.1	9.1
SVOCs	534-52-1	2-Methyl-4,6-dinitrophenol			0.15	0.15
SVOCs	91-57-6	2-Methylnaphthalene			3.6	3.6
SVOCs	95-48-7	2-Methylphenol			93	93
SVOCs	91-59-8	2-Naphthalenamine			0.039	0.039
SVOCs	88-74-4	2-Nitrobenzenamine			19	19
SVOCs	88-75-5	2-Nitrophenol				---
SVOCs	91-94-1	3,3'-Dichlorobenzidine			0.13	0.13
SVOCs	119-93-7	3,3'-Dimethylbenzidine			0.0065	0.0065
SVOCs	15831-10-4	3+4-Methylphenol				---
SVOCs	56-49-5	3-Methylcholanthrene			0.0011	0.0011
SVOCs	108-39-4	3-Methylphenol			93	93
SVOCs	99-09-2	3-Nitrobenzenamine				---
SVOCs	92-67-1	4-Aminobiphenyl			0.003	0.003
SVOCs	101-55-3	4-Bromophenyl phenyl ether				---
SVOCs	59-50-7	4-Chloro-3-methylphenol			140	140
SVOCs	106-47-8	4-Chlorobenzenamine			0.37	0.37
SVOCs	7005-72-3	4-Chlorophenyl phenyl ether				---
SVOCs	106-44-5	4-Methylphenol			190	190
SVOCs	100-01-6	4-Nitrobenzenamine	3.13		3.8	3.13
SVOCs	100-02-7	4-Nitrophenol				---
SVOCs	94-59-7	(Safrole)			0.096	0.096
SVOCs	99-55-8	5-Nitro-o-toluidine			8.2	8.2
SVOCs	57-97-6	7,12-Dimethylbenz(a)anthracene			0.0001	0.0001
SVOCs	83-32-9	Acenaphthene			53	53
SVOCs	208-96-8	Acenaphthylene				---
SVOCs	98-86-2	Acetophenone			190	190
SVOCs	120-12-7	Anthracene			180	180
SVOCs	1912-24-9	Atrazine		3	0.3	0.3
SVOCs	56-55-3	Benz(a)anthracene	0.004		0.012	0.004
SVOCs	100-52-7	Benzaldehyde			190	190
SVOCs	100-51-6	Benzenemethanol			200	200
SVOCs	50-32-8	Benzo(a)pyrene	0.2	0.2	0.0034	0.2
SVOCs	205-99-2	Benzo(b)fluoranthene	0.002		0.034	0.002
SVOCs	191-24-2	Benzo(ghi)perylene				---
SVOCs	207-08-9	Benzo(k)fluoranthene			0.34	0.34
SVOCs	65-85-0	Benzoic acid			7500	7500
SVOCs	111-91-1	bis(2-Chloroethoxy)methane			5.9	5.9
SVOCs	111-44-4	bis(2-Chloroethyl) ether			0.014	0.014
SVOCs	108-60-1	Bis(2-chloroisopropyl) ether			71	71
SVOCs	117-81-7	Bis(2-ethylhexyl)phthalate	6	6	5.6	6
SVOCs	85-68-7	Butyl benzyl phthalate			16	16
SVOCs	105-60-2	Caprolactam			990	990
SVOCs	86-74-8	Carbazole				---
SVOCs	510-15-6	Chlorobenzilate			0.31	0.31
SVOCs	218-01-9	Chrysene			3.4	3.4
SVOCs	2303-16-4	Diallate			0.54	0.54
SVOCs	53-70-3	Dibenz(a,h)anthracene	0.002		0.0034	0.002

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
SVOCs	132-64-9	Dibenzofuran			0.79	0.79
SVOCs	84-66-2	Diethyl phthalate			1500	1500
SVOCs	60-51-5	Dimethoate			0.4	0.4
SVOCs	131-11-3	Dimethyl phthalate				---
SVOCs	84-74-2	Di-n-butyl phthalate			90	90
SVOCs	117-84-0	Di-n-octylphthalate			20	20
SVOCs	122-39-4	Diphenylamine			31	31
SVOCs	298-04-4	Disulfoton			0.05	0.05
SVOCs	62-50-0	Ethyl methanesulfonate				---
SVOCs	52-85-7	Famphur				---
SVOCs	206-44-0	Fluoranthene			80	80
SVOCs	86-73-7	Fluorene			29	29
SVOCs	1888-71-7	Hexachloro-1-propene				---
SVOCs	118-74-1	Hexachlorobenzene		1	0.0098	0.0098
SVOCs	87-68-3	Hexachlorobutadiene (SVOC)			0.14	0.14
SVOCs	77-47-4	Hexachlorocyclopentadiene		50	0.041	0.041
SVOCs	67-72-1	Hexachloroethane			0.33	0.33
SVOCs	193-39-5	Indeno(1,2,3-cd)pyrene	0.002		0.034	0.002
SVOCs	78-59-1	Isophorone			78	78
SVOCs	120-58-1	Isosafrole				---
SVOCs	91-80-5	Methapyrilene				---
SVOCs	66-27-3	Methyl methanesulfonate			0.79	0.79
SVOCs	91-20-3	Naphthalene (SVOC)			0.17	0.17
SVOCs	98-95-3	Nitrobenzene	0.521		0.14	0.521
SVOCs	55-18-5	N-Nitrosodiethylamine			0.00017	0.00017
SVOCs	62-75-9	N-Nitrosodimethylamine			0.00011	0.00011
SVOCs	924-16-3	N-Nitroso-di-n-butylamine			0.0027	0.0027
SVOCs	621-64-7	N-Nitroso-di-n-propylamine			0.011	0.011
SVOCs	86-30-6	N-Nitrosodiphenylamine			12	12
SVOCs	10595-95-6	N-Nitrosomethylethylamine			0.00071	0.00071
SVOCs	100-75-4	N-Nitrosopiperidine			0.0082	0.0082
SVOCs	930-55-2	N-Nitrosopyrrolidine			0.037	0.037
SVOCs	126-68-1	O,O,O-Triethylphosphorothioate				---
SVOCs	95-53-4	o-Toluidine				---
SVOCs	60-11-7	p-Dimethylaminoazobenzene			0.005	0.005
SVOCs	608-93-5	Pentachlorobenzene			0.32	0.32
SVOCs	82-68-8	Pentachloronitrobenzene			0.12	0.12
SVOCs	87-86-5	Pentachlorophenol	1	1	0.041	1
SVOCs	62-44-2	Phenacetin			34	34
SVOCs	85-01-8	Phenanthrene				---
SVOCs	108-95-2	Phenol			580	580
SVOCs	64743-03-9	Phenols				---
SVOCs	298-02-2	Phorate			0.3	0.3
SVOCs	106-50-3	p-Phenylenediamine			380	380
SVOCs	23950-58-5	Pronamide			120	120
SVOCs	129-00-0	Pyrene			12	12
SVOCs	297-97-2	Thionazin				---
VOCs	630-20-6	1,1,1,2-Tetrachloroethane			0.57	0.57
VOCs	71-55-6	1,1,1-Trichloroethane		200	800	800
VOCs	79-34-5	1,1,2,2-Tetrachloroethane	0.069		0.076	0.069
VOCs	76-13-1	1,1,2-Trichloro-1,2,2-trifluoroethane			5500	5500

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
VOCs	79-00-5	1,1,2-Trichloroethane		5	0.041	0.041
VOCs	75-34-3	1,1-Dichloroethane			2.8	2.8
VOCs	75-35-4	1,1-Dichloroethene		7	28	28
VOCs	563-58-6	1,1-Dichloropropene				---
VOCs	96-18-4	1,2,3-Trichloropropane			0.00075	0.00075
VOCs	120-82-1	1,2,4-Trichlorobenzene (VOC)		70	0.4	0.4
VOCs	96-12-8	1,2-Dibromo-3-chloropropane		0.2	0.00033	0.00033
VOCs	106-93-4	1,2-Dibromoethane		0.05	0.0075	0.0075
VOCs	95-50-1	1,2-Dichlorobenzene (VOC)		600	30	30
VOCs	107-06-2	1,2-Dichloroethane	5	5	0.17	5
VOCs	540-59-0	1,2-Dichloroethene				---
VOCs	78-87-5	1,2-Dichloropropane		5	0.44	0.44
VOCs	541-73-1	1,3-Dichlorobenzene (VOC)				---
VOCs	142-28-9	1,3-Dichloropropane			37	37
VOCs	106-46-7	1,4-Dichlorobenzene (VOC)		75	0.48	0.48
VOCs	594-20-7	2,2-Dichloropropane				---
VOCs	78-93-3	2-Butanone			560	560
VOCs	126-99-8	2-Chloro-1,3-butadiene			0.019	0.019
VOCs	110-75-8	2-Chloroethyl vinyl ether				---
VOCs	591-78-6	2-Hexanone			3.8	3.8
VOCs	1634-04-4	2-Methoxy-2-methylpropane			14	14
VOCs	108-10-1	4-Methyl-2-pentanone			630	630
VOCs	67-64-1	Acetone			1400	1400
VOCs	75-05-8	Acetonitrile			13	13
VOCs	107-02-8	Acrolein			0.0042	0.0042
VOCs	107-13-1	Acrylonitrile			0.052	0.052
VOCs	107-05-1	Allyl chloride			0.21	0.21
VOCs	71-43-2	Benzene	5	5	0.46	5
VOCs	74-97-5	Bromochloromethane			8.3	8.3
VOCs	75-27-4	Bromodichloromethane			0.13	0.13
VOCs	75-25-2	Bromoform			3.3	3.3
VOCs	74-83-9	Bromomethane			0.75	0.75
VOCs	75-15-0	Carbon disulfide			81	81
VOCs	56-23-5	Carbon tetrachloride	5	5	0.46	5
VOCs	108-90-7	Chlorobenzene		100	7.8	7.8
VOCs	75-00-3	Chloroethane			2100	2100
VOCs	67-66-3	Chloroform	0.207		0.22	0.207
VOCs	74-87-3	Chloromethane			19	19
VOCs	156-59-2	cis-1,2-Dichloroethene		70	3.6	3.6
VOCs	10061-01-5	cis-1,3-Dichloropropene				---
VOCs	98-82-8	Cumene			45	45
VOCs	110-82-7	Cyclohexane			1300	1300
VOCs	124-48-1	Dibromochloromethane			0.87	0.87
VOCs	74-95-3	Dibromomethane			0.83	0.83
VOCs	75-71-8	Dichlorodifluoromethane			20	20
VOCs	107-12-0	Ethyl cyanide				---
VOCs	97-63-2	Ethyl methacrylate			63	63
VOCs	100-41-4	Ethylbenzene		700	1.5	1.5
VOCs	74-88-4	Iodomethane				---
VOCs	78-83-1	Isobutanol			590	590
VOCs	126-98-7	Methacrylonitrile			0.19	0.19

**Table 3-3
Screening Criteria**

Sum Category	CAS Number	Parameter Name	FWCUG	MCL	RSL	Screening Criteria
VOCs	79-20-9	Methyl acetate			2000	2000
VOCs	80-62-6	Methyl methacrylate			140	140
VOCs	108-87-2	Methylcyclohexane				---
VOCs	75-09-2	Methylene chloride	5.34	5	11	5.34
VOCs	100-42-5	Styrene		100	120	120
VOCs	127-18-4	Tetrachloroethene	5	5	4.1	5
VOCs	108-88-3	Toluene		1000	110	110
VOCs	156-60-5	trans-1,2-Dichloroethene		100	36	36
VOCs	10061-02-6	trans-1,3-Dichloropropene				---
VOCs	110-57-6	trans-1,4-Dichloro-2-butene			0.0013	0.0013
VOCs	79-01-6	Trichloroethene	5	5	0.28	5
VOCs	75-69-4	Trichlorofluoromethane			520	520
VOCs	108-05-4	Vinyl acetate			41	41
VOCs	75-01-4	Vinyl chloride		2	0.019	0.019
VOCs	179601-23-1	Xylene, m+p				---
VOCs	95-47-6	Xylene, ortho			19	19
VOCs	1330-20-7	Xylenes, total		10000	19	19

Notes and Abbreviations:

FWCUG - Facility Wide Cleanup Goal, from the Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army ammunition Plant, Ravenna, Ohio, dated March 23, 2010, prepared by EQM.

MCL - U.S. EPA Maximum Contaminant Level

PCBs - Polychlorinated biphenyls

RSL - Regional Screening Level, from November 2015 (using a THQ=0.1, and HQ=10e-6).

SVOCs - Semivolatile Organic Compounds

VOCs - Volatile Organic Compounds

Highlighted and Bold values identify the screening value.

Note that the FWCUG for metals are not included in this table; these will be revised during the pending Remedial Investigation.

Load Line 1

Table A10-1
Load Line 1 Groundwater Data Summary

Well	Zone Monitored	COC	Discussion
LL1mw-067	Sandstone bedrock	Aluminum	5 samples collected after the remedial action, all results < RSL, 4 results ND
		Antimony	5 samples collected after the remedial action, all results ND
		Arsenic	5 samples collected after the remedial action, 4 results ND
		Barium	5 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	5 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	5 samples collected after the remedial action, all results > RSL, no apparent trend
		Lead	5 samples collected after the remedial action, 4 results ND
		2,4,6-TNT	4 samples collected after the remedial action, all results ND
		RDX	4 samples collected after the remedial action, all results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL1mw-078	Sandstone bedrock	Aluminum	3 samples collected after the remedial action, all results < RSL
		Antimony	3 samples collected after the remedial action, 2 results ND, all results < RSL
		Arsenic	3 samples collected after the remedial action, 2 results ND
		Barium	3 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	3 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	3 samples collected after the remedial action, all results > RSL, no apparent trend
		Lead	3 samples collected after the remedial action, 2 results ND, all results < RSL
		2,4,6-TNT	2 samples collected after the remedial action, all results ND
		RDX	2 samples collected after the remedial action, 1 result ND, 1 result < FWCUG
		Aroclor-1254	2 samples collected after the remedial action, all results ND
		Benz(a)anthracene	2 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	2 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	2 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	2 samples collected after the remedial action, all results ND
LL1mw-081	Sandstone bedrock	Aluminum	6 samples collected after the remedial action, 5 results ND & 1 result estimated (< detection limit)
		Antimony	6 samples collected after the remedial action, all results ND
		Arsenic	6 samples collected after the remedial action, 5 results ND & 2 results estimated (< detection limit)
		Barium	6 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	6 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	1 sample collected since the remedial action, ND result
		Manganese	6 samples collected after the remedial action, all results > RSL, no apparent trend
		Lead	6 samples collected after the remedial action, all results ND
		2,4,6-TNT	5 samples collected after the remedial action, 3 results ND & 2 results estimated (< detection limit)
		RDX	5 samples collected after the remedial action, 3 results estimated (< detection limit), all results < FWCUG
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL1mw-082	Sandstone bedrock	Aluminum	6 samples collected after the remedial action, 5 results ND
		Antimony	6 samples collected after the remedial action, all results ND
		Arsenic	6 samples collected after the remedial action, 3 results ND, 2 results estimated (< detection limit)
		Barium	6 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	6 samples collected after the remedial action, 1 result ND, 5 results estimated (< detection limit), all results < RSL
		Chromium (hexavalent)	1 sample collected since the remedial action, ND result
		Manganese	6 samples collected after the remedial action, all results > RSL, upward trend
		Lead	6 samples collected after the remedial action, 5 results ND
		2,4,6-TNT	5 samples collected after the remedial action, all results ND
		RDX	5 samples collected after the remedial action, 4 results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL1mw-084	Sandstone bedrock	Aluminum	11 samples collected after the remedial action, 10 results < RSL, downward trend
		Antimony	11 samples collected after the remedial action, all results ND
		Arsenic	11 samples collected after the remedial action, 9 results ND & 1 result estimated (< detection limit)
		Barium	11 samples collected after the remedial action, all results < RSL, no trend
		Cadmium	11 samples collected after the remedial action, all results > RSL, no trend
		Chromium (hexavalent)	1 sample collected since the remedial action, ND result
		Manganese	11 samples collected after the remedial action, all results > RSL, decreasing trend
		Lead	11 samples collected after the remedial action, 9 results ND
		2,4,6-TNT	10 samples collected after the remedial action, 9 results estimated (< detection limit), all results > FWCUG, no trend
		RDX	10 samples collected after the remedial action, 9 results estimated (< detection limit), 5 results > FWCUG, no trend
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND

Table A10-1
Load Line 1 Groundwater Data Summary

Well	Zone Monitored	COC	Discussion
LL1mw-085	Sandstone bedrock	Aluminum	6 samples collected after the remedial action, 5 results ND
		Antimony	6 samples collected after the remedial action, all results ND
		Arsenic	6 samples collected after the remedial action, all results < RSL
		Barium	6 samples collected after the remedial action, all results < RSL
		Cadmium	6 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	1 sample collected since the remedial action, ND result
		Manganese	6 samples collected after the remedial action, all results > RSL, upward trend
		Lead	6 samples collected after the remedial action, all results ND
		2,4,6-TNT	5 samples collected after the remedial action, all results ND
		RDX	5 samples collected after the remedial action, all results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND

Notes:

FWCUG = Facility Wide Cleanup Goal from EQM, 2010, *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 23

ND = not detected

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, *Draft Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015*. February 2016

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-067	LL1MW067-080107	8/1/2007	2,4,6-Trinitrotoluene	0.001	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	2,4,6-Trinitrotoluene	0.000099	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Aluminum	0.1	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Aluminum	0.05	mg/L	U
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Aluminum	1.71	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Aluminum	0.05	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Aluminum	0.05	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Aluminum	0.05	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Aluminum	0.05	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Antimony	0.00088	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Antimony	0.00015	mg/L	UJ
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Antimony	0.002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Antimony	0.002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Antimony	0.002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Antimony	0.002	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Arsenic	0.001	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Arsenic	0.0084	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Arsenic	0.005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Arsenic	0.005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Arsenic	0.005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Arsenic	0.005	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Barium	0.0203	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Barium	0.0195	mg/L	
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Barium	0.0277	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Barium	0.0112	mg/L	
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Barium	0.015	mg/L	
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Barium	0.0341	mg/L	
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Barium	0.0274	mg/L	
LL1mw-067	LL1MW067-080107	8/1/2007	Benz(a)anthracene	0.00549	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	Benz(a)anthracene	0.00025	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Benzo(a)pyrene	0.00549	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	Benzo(a)pyrene	0.00025	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Benzo(b)fluoranthene	0.00549	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	Benzo(b)fluoranthene	0.00025	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Cadmium	0.01	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Cadmium	0.0005	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Cadmium	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Cadmium	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Cadmium	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Cadmium	0.0005	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Dibenz(a,h)anthracene	0.00549	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	Dibenz(a,h)anthracene	0.00025	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Lead	0.001	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Lead	0.003	mg/L	U
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Lead	0.0049	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Lead	0.003	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Lead	0.003	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Lead	0.003	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Lead	0.003	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	Manganese	0.0454	mg/L	
LL1mw-067	FWGLL1mw-067-024-GF	10/19/2009	Manganese	0.0132	mg/L	
LL1mw-067	FWGLL1mw-067-024-GW	10/19/2009	Manganese	0.104	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GF	7/14/2010	Manganese	0.0131	mg/L	
LL1mw-067	FWGLL1mw-067C-1589-GF	10/11/2010	Manganese	0.0119	mg/L	
LL1mw-067	FWGLL1mw-067C-1640-GF	1/17/2011	Manganese	0.0677	mg/L	
LL1mw-067	FWGLL1mw-067C-1715-GF	4/5/2011	Manganese	0.085	mg/L	
LL1mw-067	LL1MW067-080107	8/1/2007	PCB-1254	0.00051	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	PCB-1254	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	PCB-1254	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	PCB-1254	0.0005	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	PCB-1254	0.0005	mg/L	U
LL1mw-067	LL1MW067-080107	8/1/2007	RDX	0.001	mg/L	
LL1mw-067	FWGLL1mw-067C-1523-GW	7/14/2010	RDX	0.0001	mg/L	U
LL1mw-067	FWGLL1mw-067C-1589-GW	10/11/2010	RDX	0.00011	mg/L	U
LL1mw-067	FWGLL1mw-067C-1640-GW	1/17/2011	RDX	0.000099	mg/L	U
LL1mw-067	FWGLL1mw-067C-1715-GW	4/5/2011	RDX	0.00011	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	2,4,6-Trinitrotoluene	0.00102	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Aluminum	0.1	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Aluminum	0.0698	mg/L	J
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Aluminum	0.253	mg/L	
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Aluminum	3.12	mg/L	
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Aluminum	0.11	mg/L	
LL1mw-078	LL1MW078-080207	8/2/2007	Antimony	0.000385	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Antimony	0.00024	mg/L	J
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Antimony	0.002	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Arsenic	0.001	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Arsenic	0.005	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Arsenic	0.0071	mg/L	
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Arsenic	0.005	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-078	LL1MW078-080207	8/2/2007	Barium	0.0115	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Barium	0.0163	mg/L	
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Barium	0.0093	mg/L	J
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Barium	0.0272	mg/L	
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Barium	0.0162	mg/L	
LL1mw-078	LL1MW078-080207	8/2/2007	Benz(a)anthracene	0.0051	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Benzo(a)pyrene	0.0051	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Benzo(b)fluoranthene	0.0051	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Cadmium	0.01	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Cadmium	0.0005	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Cadmium	0.0005	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Cadmium	0.0005	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Lead	0.001	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Lead	0.003	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Lead	0.003	mg/L	U
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Lead	0.0061	mg/L	
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Lead	0.003	mg/L	U
LL1mw-078	LL1MW078-080207	8/2/2007	Manganese	0.0559	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GF	10/8/2007	Manganese	0.12	mg/L	
LL1mw-078	FWGLL1mw-078-025-GF	10/19/2009	Manganese	0.0338	mg/L	
LL1mw-078	FWGLL1mw-078-025-GW	10/19/2009	Manganese	0.159	mg/L	
LL1mw-078	FWGLL1mw-078C-1524-GF	7/14/2010	Manganese	0.071	mg/L	
LL1mw-078	LL1MW078-080207	8/2/2007	PCB-1254	0.0005	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	PCB-1254	0.0005	mg/L	UJ
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	PCB-1254	0.0005	mg/L	UJ
LL1mw-078	LL1MW078-080207	8/2/2007	RDX	0.00102	mg/L	
LL1mw-078	FWGLL1mw-078C-0535-GW	10/8/2007	RDX	0.0001	mg/L	U
LL1mw-078	FWGLL1mw-078C-1524-GW	7/14/2010	RDX	0.000095	mg/L	J
LL1mw-081	LL1MW081-080207	8/2/2007	2,4,6-Trinitrotoluene	0.00102	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	2,4,6-Trinitrotoluene	0.000097	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	2,4,6-Trinitrotoluene	0.000057	mg/L	J
LL1mw-081	FWGLL1mw-081C-1765-GW	8/1/2011	2,4,6-Trinitrotoluene	0.00005	mg/L	J
LL1mw-081	LL1MW081-080207	8/2/2007	Aluminum	0.1	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Aluminum	0.05	mg/L	U
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Aluminum	0.0262	mg/L	UJB
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Aluminum	0.05	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Aluminum	0.05	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Aluminum	0.05	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Aluminum	0.05	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Aluminum	0.025	mg/L	J
LL1mw-081	LL1MW081-080207	8/2/2007	Antimony	0.001	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Antimony	0.002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Antimony	0.002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Antimony	0.002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Antimony	0.002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Antimony	0.00018	mg/L	U
LL1mw-081	LL1MW081-080207	8/2/2007	Arsenic	0.00102	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Arsenic	0.0044	mg/L	J
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Arsenic	0.005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Arsenic	0.005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Arsenic	0.005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Arsenic	0.005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Arsenic	0.0032	mg/L	J
LL1mw-081	LL1MW081-080207	8/2/2007	Barium	0.0236	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Barium	0.0168	mg/L	
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Barium	0.0188	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Barium	0.0182	mg/L	
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Barium	0.0195	mg/L	
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Barium	0.0206	mg/L	
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Barium	0.0214	mg/L	
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Barium	0.018	mg/L	
LL1mw-081	LL1MW081-080207	8/2/2007	Benz(a)anthracene	0.0051	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-081	LL1MW081-080207	8/2/2007	Benzo(a)pyrene	0.0051	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-081	LL1MW081-080207	8/2/2007	Benzo(b)fluoranthene	0.0051	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-081	LL1MW081-080207	8/2/2007	Cadmium	0.01	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Cadmium	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Chromium, hexavalent	0.02	mg/L	UJ
LL1mw-081	LL1MW081-080207	8/2/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-081	LL1MW081-080207	8/2/2007	Lead	0.001	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Lead	0.003	mg/L	U
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Lead	0.003	mg/L	U
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Lead	0.003	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Lead	0.003	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Lead	0.003	mg/L	U
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Lead	0.003	mg/L	U
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Lead	0.003	mg/L	U
LL1mw-081	LL1MW081-080207	8/2/2007	Manganese	2.09	mg/L	
LL1mw-081	FWGLL1mw-081-028-GF	10/19/2009	Manganese	1.9	mg/L	
LL1mw-081	FWGLL1mw-081-028-GW	10/19/2009	Manganese	1.85	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GF	7/14/2010	Manganese	1.83	mg/L	
LL1mw-081	FWGLL1mw-081C-1590-GF	10/11/2010	Manganese	1.95	mg/L	
LL1mw-081	FWGLL1mw-081C-1641-GF	1/17/2011	Manganese	2.03	mg/L	
LL1mw-081	FWGLL1mw-081C-1716-GF	4/5/2011	Manganese	2.17	mg/L	
LL1mw-081	FWGLL1mw-081C-1765-GF	8/1/2011	Manganese	2	mg/L	
LL1mw-081	LL1MW081-080207	8/2/2007	PCB-1254	0.0005	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	PCB-1254	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	PCB-1254	0.0005	mg/L	U
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	PCB-1254	0.0005	mg/L	UJ
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	PCB-1254	0.0005	mg/L	UJ
LL1mw-081	LL1MW081-080207	8/2/2007	RDX	0.00102	mg/L	
LL1mw-081	FWGLL1mw-081C-1526-GW	7/14/2010	RDX	0.001	mg/L	
LL1mw-081	FWGLL1mw-081C-1590-GW	10/11/2010	RDX	0.00035	mg/L	J
LL1mw-081	FWGLL1mw-081C-1641-GW	1/17/2011	RDX	0.0011	mg/L	J
LL1mw-081	FWGLL1mw-081C-1716-GW	4/5/2011	RDX	0.0016	mg/L	
LL1mw-081	FWGLL1mw-081C-1765-GW	8/1/2011	RDX	0.0016	mg/L	J
LL1mw-082	LL1MW082-080207	8/2/2007	2,4,6-Trinitrotoluene	0.001	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	2,4,6-Trinitrotoluene	0.000098	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL1mw-082	FWGLL1mw-082C-1766-GW	8/1/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Aluminum	0.1	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Aluminum	0.05	mg/L	U
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Aluminum	5.2	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Aluminum	0.05	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Aluminum	0.05	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Aluminum	0.05	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Aluminum	0.05	mg/L	U
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Aluminum	0.05	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Antimony	0.001	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Antimony	0.00014	mg/L	UJ
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Antimony	0.002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Antimony	0.002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Antimony	0.002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Antimony	0.002	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Antimony	0.002	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Arsenic	0.00191	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Arsenic	0.018	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Arsenic	0.005	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Arsenic	0.005	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Arsenic	0.005	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Arsenic	0.0036	mg/L	J
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Arsenic	0.0049	mg/L	J
LL1mw-082	LL1MW082-080207	8/2/2007	Barium	0.0103	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Barium	0.0118	mg/L	
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Barium	0.045	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Barium	0.0099	mg/L	J
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Barium	0.0096	mg/L	J
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Barium	0.0111	mg/L	
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Barium	0.0109	mg/L	
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Barium	0.01	mg/L	
LL1mw-082	LL1MW082-080207	8/2/2007	Benz(a)anthracene	0.0051	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Benzo(a)pyrene	0.0051	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Benzo(b)fluoranthene	0.0051	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Cadmium	0.01	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Cadmium	0.00032	mg/L	J
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Cadmium	0.00018	mg/L	J
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Cadmium	0.00019	mg/L	J
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Cadmium	0.0002	mg/L	J
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Cadmium	0.00017	mg/L	J
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Cadmium	0.0005	mg/L	U
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Chromium, hexavalent	0.02	mg/L	UJ
LL1mw-082	LL1MW082-080207	8/2/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Lead	0.001	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Lead	0.003	mg/L	U
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Lead	0.0237	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Lead	0.003	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Lead	0.003	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Lead	0.003	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Lead	0.003	mg/L	U
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Lead	0.003	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	Manganese	0.693	mg/L	
LL1mw-082	FWGLL1mw-082-029-GF	10/19/2009	Manganese	0.945	mg/L	
LL1mw-082	FWGLL1mw-082-029-GW	10/19/2009	Manganese	1	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GF	7/15/2010	Manganese	1.08	mg/L	
LL1mw-082	FWGLL1mw-082C-1591-GF	10/11/2010	Manganese	0.456	mg/L	
LL1mw-082	FWGLL1mw-082C-1642-GF	1/17/2011	Manganese	2.66	mg/L	
LL1mw-082	FWGLL1mw-082C-1718-GF	4/5/2011	Manganese	1.64	mg/L	
LL1mw-082	FWGLL1mw-082C-1766-GF	8/1/2011	Manganese	1.2	mg/L	
LL1mw-082	LL1MW082-080207	8/2/2007	PCB-1254	0.0005	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	PCB-1254	0.0005	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	PCB-1254	0.0005	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	PCB-1254	0.0005	mg/L	UJ
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	PCB-1254	0.0005	mg/L	U
LL1mw-082	LL1MW082-080207	8/2/2007	RDX	0.001	mg/L	
LL1mw-082	FWGLL1mw-082C-1527-GW	7/15/2010	RDX	0.000098	mg/L	U
LL1mw-082	FWGLL1mw-082C-1591-GW	10/11/2010	RDX	0.0001	mg/L	U
LL1mw-082	FWGLL1mw-082C-1642-GW	1/17/2011	RDX	0.0001	mg/L	U
LL1mw-082	FWGLL1mw-082C-1718-GW	4/5/2011	RDX	0.00042	mg/L	
LL1mw-082	FWGLL1mw-082C-1766-GW	8/1/2011	RDX	0.0001	mg/L	UJ
LL1mw-084	LL1MW084-080207	8/2/2007	2,4,6-Trinitrotoluene	0.00918	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	2,4,6-Trinitrotoluene	0.0092	mg/L	J
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	2,4,6-Trinitrotoluene	0.01	mg/L	J
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	2,4,6-Trinitrotoluene	0.009	mg/L	J
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	2,4,6-Trinitrotoluene	0.013	mg/L	J
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	2,4,6-Trinitrotoluene	0.012	mg/L	J
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	2,4,6-Trinitrotoluene	0.0084	mg/L	J
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	2,4,6-Trinitrotoluene	0.0098	mg/L	J
LL1mw-084	FWGLL1mw-084C-1768-GW	8/1/2011	2,4,6-Trinitrotoluene	0.0073	mg/L	
LL1mw-084	FWGLL1mw-084C-0355-GW	8/21/2013	2,4,6-Trinitrotoluene	0.012	mg/L	J
LL1mw-084	FWGLL1mw-084C-0392-GW	1/21/2014	2,4,6-Trinitrotoluene	0.012	mg/L	J
LL1mw-084	FWGLL1mw-084C-0465-GW	7/21/2014	2,4,6-Trinitrotoluene	0.01	mg/L	J
LL1mw-084	FWGLL1mw-084C-0522-GW	3/10/2015	2,4,6-Trinitrotoluene	0.012	mg/L	J
LL1mw-084	FWGLL1mw-084C-0584-GW	7/20/2015	2,4,6-Trinitrotoluene	0.0058	mg/L	J
LL1mw-084	LL1MW084-080207	8/2/2007	Aluminum	1.59	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Aluminum	0.53	mg/L	
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Aluminum	14.1	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Aluminum	0.335	mg/L	
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Aluminum	0.515	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Aluminum	0.465	mg/L	
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Aluminum	0.337	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Aluminum	0.357	mg/L	
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Aluminum	0.246	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Aluminum	0.244	mg/L	
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Aluminum	0.59	mg/L	
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Aluminum	1.3	mg/L	
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Aluminum	0.21	mg/L	
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Aluminum	0.22	mg/L	
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Aluminum	0.24	mg/L	

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Aluminum	0.44	mg/L	
LL1mw-084	LL1MW084-080207	8/2/2007	Antimony	0.000322	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Antimony	0.00029	mg/L	UJ
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Antimony	0.002	mg/L	U
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Antimony	0.001	mg/L	U
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Antimony	0.001	mg/L	U
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Antimony	0.001	mg/L	U
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Antimony	0.001	mg/L	U
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Antimony	0.001	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Arsenic	0.001	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Arsenic	0.0125	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Arsenic	0.0044	mg/L	J
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Arsenic	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Arsenic	0.01	mg/L	U
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Arsenic	0.01	mg/L	U
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Arsenic	0.01	mg/L	U
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Arsenic	0.01	mg/L	U
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Arsenic	0.01	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Barium	0.0166	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Barium	0.0142	mg/L	
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Barium	0.0368	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Barium	0.014	mg/L	
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Barium	0.0161	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Barium	0.0155	mg/L	
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Barium	0.0178	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Barium	0.0188	mg/L	
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Barium	0.0167	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Barium	0.0171	mg/L	
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Barium	0.015	mg/L	
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Barium	0.018	mg/L	
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Barium	0.017	mg/L	
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Barium	0.016	mg/L	
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Barium	0.015	mg/L	J
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Barium	0.015	mg/L	B
LL1mw-084	LL1MW084-080207	8/2/2007	Benz(a)anthracene	0.0051	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	Benz(a)anthracene	0.0002	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Benzo(a)pyrene	0.0051	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Benzo(b)fluoranthene	0.0051	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Cadmium	0.01	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Cadmium	0.0019	mg/L	
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Cadmium	0.0019	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Cadmium	0.0016	mg/L	
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Cadmium	0.002	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Cadmium	0.002	mg/L	
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Cadmium	0.0018	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Cadmium	0.0019	mg/L	
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Cadmium	0.0015	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Cadmium	0.0015	mg/L	
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Cadmium	0.0015	mg/L	
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Cadmium	0.0014	mg/L	
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Cadmium	0.0012	mg/L	
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Cadmium	0.0017	mg/L	
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Cadmium	0.0017	mg/L	J
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Cadmium	0.0023	mg/L	
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Chromium, hexavalent	0.02	mg/L	UJ
LL1mw-084	LL1MW084-080207	8/2/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Lead	0.00281	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Lead	0.0177	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Lead	0.003	mg/L	U

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Lead	0.0027	mg/L	J
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Lead	0.003	mg/L	U
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Lead	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Lead	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Lead	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Lead	0.005	mg/L	U
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Lead	0.0025	mg/L	U
LL1mw-084	LL1MW084-080207	8/2/2007	Manganese	0.306	mg/L	
LL1mw-084	FWGLL1mw-084-031-GF	10/19/2009	Manganese	0.153	mg/L	
LL1mw-084	FWGLL1mw-084-031-GW	10/19/2009	Manganese	0.184	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GF	7/14/2010	Manganese	0.196	mg/L	
LL1mw-084	FWGLL1mw-084C-1592-GF	10/11/2010	Manganese	0.164	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1625-GF	10/11/2010	Manganese	0.157	mg/L	
LL1mw-084	FWGLL1mw-084C-1643-GF	1/17/2011	Manganese	0.222	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1693-GF	1/17/2011	Manganese	0.237	mg/L	
LL1mw-084	FWGLL1mw-084C-1719-GF	4/5/2011	Manganese	0.192	mg/L	
LL1mw-084	FWGLL1mw-DUP2-1747-GF	4/5/2011	Manganese	0.196	mg/L	
LL1mw-084	FWGLL1mw-084C-1768-GF	8/1/2011	Manganese	0.17	mg/L	
LL1mw-084	FWGLL1mw-084C-0355-GF	8/21/2013	Manganese	0.067	mg/L	
LL1mw-084	FWGLL1mw-084C-0392-GF	1/21/2014	Manganese	0.1	mg/L	J
LL1mw-084	FWGLL1mw-084C-0465-GF	7/21/2014	Manganese	0.15	mg/L	
LL1mw-084	FWGLL1mw-084C-0522-GF	3/10/2015	Manganese	0.14	mg/L	
LL1mw-084	FWGLL1mw-084C-0584-GF	7/20/2015	Manganese	0.1	mg/L	
LL1mw-084	LL1MW084-080207	8/2/2007	PCB-1254	0.000538	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	PCB-1254	0.0005	mg/L	U
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	PCB-1254	0.0005	mg/L	UJ
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	PCB-1254	0.0005	mg/L	UJ
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	PCB-1254	0.0005	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	PCB-1254	0.0005	mg/L	U
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	PCB-1254	0.0005	mg/L	UJ
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	PCB-1254	0.0005	mg/L	UJ
LL1mw-084	LL1MW084-080207	8/2/2007	RDX	0.00242	mg/L	
LL1mw-084	FWGLL1mw-084C-1529-GW	7/14/2010	RDX	0.00076	mg/L	J
LL1mw-084	FWGLL1mw-084C-1592-GW	10/11/2010	RDX	0.0001	mg/L	U
LL1mw-084	FWGLL1mw-DUP2-1625-GW	10/11/2010	RDX	0.000097	mg/L	U
LL1mw-084	FWGLL1mw-084C-1643-GW	1/17/2011	RDX	0.00069	mg/L	J
LL1mw-084	FWGLL1mw-DUP2-1693-GW	1/17/2011	RDX	0.00066	mg/L	J
LL1mw-084	FWGLL1mw-084C-1719-GW	4/5/2011	RDX	0.00042	mg/L	J
LL1mw-084	FWGLL1mw-DUP2-1747-GW	4/5/2011	RDX	0.00049	mg/L	J
LL1mw-084	FWGLL1mw-084C-1768-GW	8/1/2011	RDX	0.00069	mg/L	J
LL1mw-084	FWGLL1mw-084C-0355-GW	8/21/2013	RDX	0.0021	mg/L	J
LL1mw-084	FWGLL1mw-084C-0392-GW	1/21/2014	RDX	0.0018	mg/L	J
LL1mw-084	FWGLL1mw-084C-0465-GW	7/21/2014	RDX	0.0015	mg/L	J
LL1mw-084	FWGLL1mw-084C-0522-GW	3/10/2015	RDX	0.00092	mg/L	J
LL1mw-084	FWGLL1mw-084C-0584-GW	7/20/2015	RDX	0.0013	mg/L	J
LL1mw-085	LL1MW085-080207	8/2/2007	2,4,6-Trinitrotoluene	0.00105	mg/L	

Table A10-2
Load Line 1 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GW	8/1/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Aluminum	0.1	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Aluminum	0.05	mg/L	U
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Aluminum	0.0322	mg/L	J
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Aluminum	0.05	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Aluminum	0.05	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Aluminum	0.05	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Aluminum	0.05	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Aluminum	0.05	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Antimony	0.000432	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Antimony	0.002	mg/L	U
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Antimony	0.002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Antimony	0.002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Antimony	0.002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Antimony	0.002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Antimony	0.002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Antimony	0.002	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Arsenic	0.00427	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Arsenic	0.005	mg/L	U
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Arsenic	0.0137	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Arsenic	0.005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Arsenic	0.0057	mg/L	
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Arsenic	0.005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Arsenic	0.0057	mg/L	
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Arsenic	0.0048	mg/L	J
LL1mw-085	LL1MW085-080207	8/2/2007	Barium	0.016	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Barium	0.0161	mg/L	
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Barium	0.0232	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Barium	0.0134	mg/L	
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Barium	0.0176	mg/L	
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Barium	0.0163	mg/L	
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Barium	0.022	mg/L	
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Barium	0.016	mg/L	
LL1mw-085	LL1MW085-080207	8/2/2007	Benz(a)anthracene	0.005	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	Benz(a)anthracene	0.0002	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Benzo(a)pyrene	0.005	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Benzo(b)fluoranthene	0.005	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	Benzo(b)fluoranthene	0.0002	mg/L	U

Table A10-2
Load Line 1 Groundwater Data


Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Cadmium	0.01	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Cadmium	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Chromium, hexavalent	0.02	mg/L	UJ
LL1mw-085	LL1MW085-080207	8/2/2007	Dibenz(a,h)anthracene	0.005	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Lead	0.001	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Lead	0.003	mg/L	U
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Lead	0.003	mg/L	U
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Lead	0.003	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Lead	0.003	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Lead	0.003	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Lead	0.003	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Lead	0.003	mg/L	U
LL1mw-085	LL1MW085-080207	8/2/2007	Manganese	0.613	mg/L	
LL1mw-085	FWGLL1mw-085-032-GF	10/20/2009	Manganese	0.546	mg/L	
LL1mw-085	FWGLL1mw-085-032-GW	10/20/2009	Manganese	0.575	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GF	7/15/2010	Manganese	0.564	mg/L	
LL1mw-085	FWGLL1mw-085C-1593-GF	10/11/2010	Manganese	0.638	mg/L	
LL1mw-085	FWGLL1mw-085C-1644-GF	1/17/2011	Manganese	0.179	mg/L	
LL1mw-085	FWGLL1mw-085C-1720-GF	4/5/2011	Manganese	1.18	mg/L	
LL1mw-085	FWGLL1mw-085C-1769-GF	8/1/2011	Manganese	0.84	mg/L	
LL1mw-085	LL1MW085-080207	8/2/2007	PCB-1254	0.00051	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	PCB-1254	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	PCB-1254	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	PCB-1254	0.0005	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	PCB-1254	0.0005	mg/L	UJ
LL1mw-085	LL1MW085-080207	8/2/2007	RDX	0.00105	mg/L	
LL1mw-085	FWGLL1mw-085C-1530-GW	7/15/2010	RDX	0.0001	mg/L	U
LL1mw-085	FWGLL1mw-085C-1593-GW	10/11/2010	RDX	0.0001	mg/L	U
LL1mw-085	FWGLL1mw-085C-1644-GW	1/17/2011	RDX	0.00011	mg/L	U
LL1mw-085	FWGLL1mw-085C-1720-GW	4/5/2011	RDX	0.0001	mg/L	U
LL1mw-085	FWGLL1mw-085C-1769-GW	8/1/2011	RDX	0.0001	mg/L	UJ

Table A10-3
Load Line 1 Groundwater Trend Plots

LL4mw-067
Manganese (mg/L)

Date	Result
8/1/2007	0.0454
10/19/2009	0.0586 mean of 2 results
7/14/2010	0.0131
10/11/2010	0.0119
1/17/2011	0.0677
4/5/2011	0.085


RSL = 0.043 mg/L

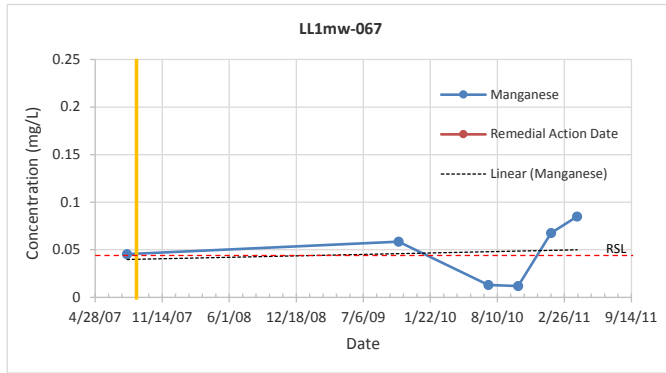

LL4mw-078
Barium (mg/L)

Date	Result
8/2/2007	0.0115
10/8/2007	0.0163
10/19/2009	0.01525 mean of 2 results
7/14/2010	0.0162


RSL = 0.38 mg/L

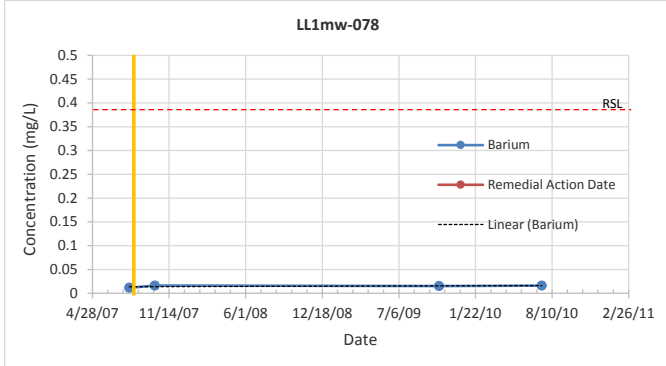

LL4mw-078
Manganese (mg/L)

Date	Result
8/2/2007	0.0559
10/8/2007	0.12
10/19/2009	0.0964 mean of 2 results
7/14/2010	0.071

RSL = 0.043 mg/L

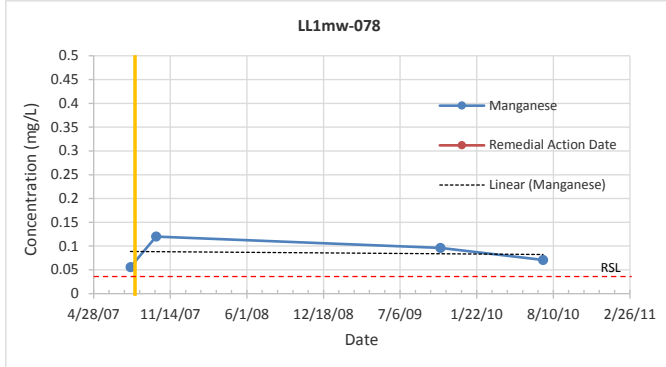

LL4mw-078
Aluminum (mg/L)

Date	Result
8/2/2007	0.1
10/8/2007	0.0698
10/19/2009	1.6865 mean of 2 results
7/14/2010	0.11

RSL = 2 mg/L

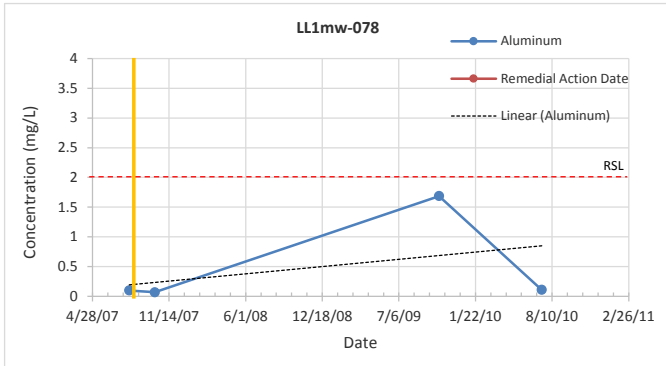



Table A10-3
Load Line 1 Groundwater Trend Plots

LL4mw-078

Barium (mg/L)

Date	Result
8/2/2007	0.0115
10/8/2007	0.0163
10/19/2009	0.01825 mean of 2 results
7/14/2010	0.0162

RSL = 0.38 mg/L

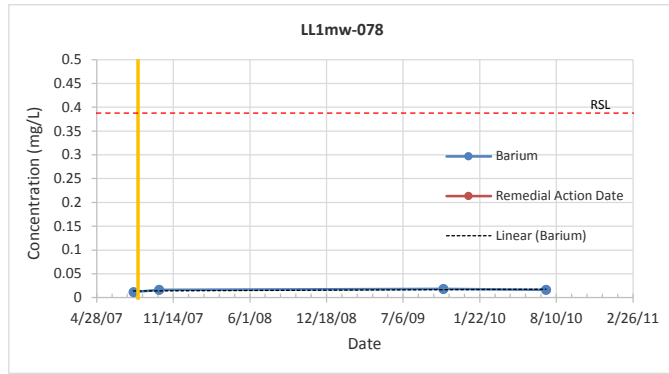


LL4mw-078

Manganese (mg/L)

Date	Result
8/2/2007	0.0559
10/8/2007	0.12
10/19/2009	0.0964 mean of 2 results
7/14/2010	0.071

RSL = 0.043 mg/L

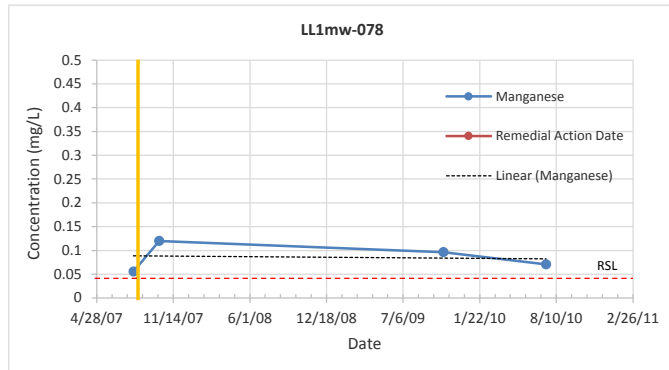


LL4mw-081

Barium (mg/L)

Date	Result
8/2/2007	0.0236
10/19/2009	0.0178 mean of 2 results
7/14/2010	0.0182
10/11/2010	0.0195
1/17/2011	0.0206
4/5/2011	0.0214
8/1/2011	0.018

RSL = 0.38 mg/L

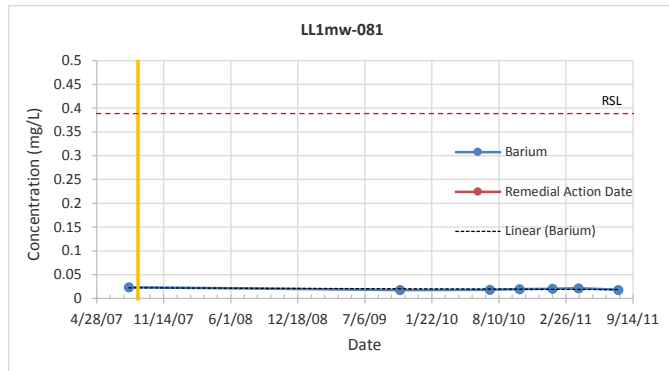

LL4mw-081

Manganese (mg/L)

Date	Result
8/2/2007	2.09
10/19/2009	1.875 mean of 2 results
7/14/2010	1.83
10/11/2010	1.95
1/17/2011	2.03
4/5/2011	2.17
8/1/2011	2

RSL = 0.043 mg/L

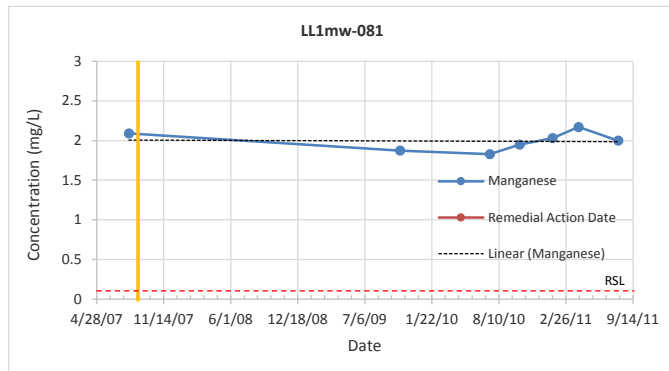



Table A10-3
Load Line 1 Groundwater Trend Plots

LL4mw-082

Barium (mg/L)

Date	Result
8/2/2007	0.0103
10/19/2009	0.0284 mean of 2 results
7/15/2010	0.0099
10/11/2010	0.0096
1/17/2011	0.0111
4/5/2011	0.0109
8/1/2011	0.01

RSL = 0.38 mg/L

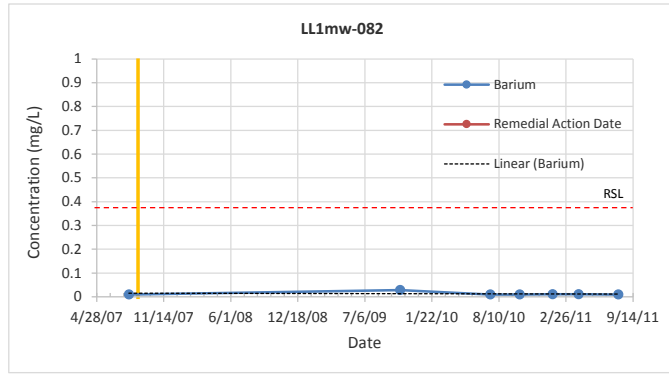


LL4mw-082

Manganese (mg/L)

Date	Result
8/2/2007	0.693
10/19/2009	0.9725 mean of 2 results
7/15/2010	1.08
10/11/2010	0.456
1/17/2011	2.66
4/5/2011	1.64
8/1/2011	1.2

RSL = 0.043 mg/L

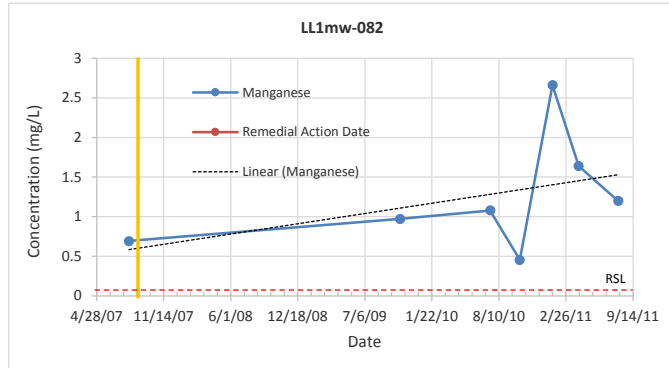

Mann-Kendall Test Using Normal Approximation for Small Sample Size

n	7
S	9
p	0.115
α	0.1
Ho:	No trend
Ha:	Upward trend
$p > \alpha$	Ho rejected at 90% level of confidence; upward trend

LL4mw-084

2,4,6-TNT (mg/L)

Date	Result
8/2/2007	0.00918
7/14/2010	0.0092
10/11/2010	0.0095 mean of 2 results
1/17/2011	0.0125 mean of 2 results
4/5/2011	0.0091 mean of 2 results
8/1/2011	0.0073
8/21/2013	0.012
1/21/2014	0.012
7/21/2014	0.01
3/10/2015	0.012
7/20/2015	0.0058

FWCUG = 0.000521 mg/L


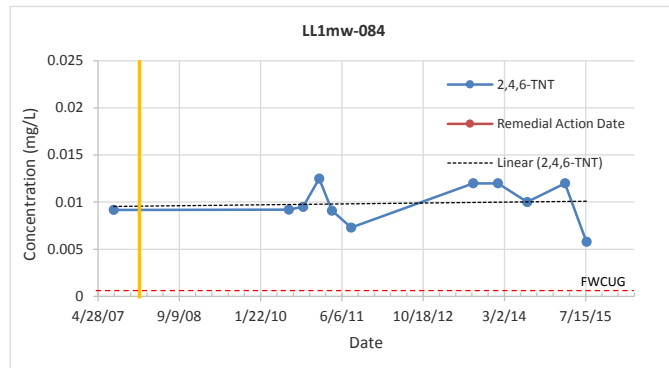


Table A10-3
Load Line 1 Groundwater Trend Plots

LL4mw-084
Aluminum (mg/L)


Date	Result
8/2/2007	1.59
10/19/2009	7.315 mean of 2 results
7/14/2010	0.335
10/11/2010	0.49 mean of 2 results
1/17/2011	0.347 mean of 2 results
4/5/2011	0.245
8/1/2011	0.59
8/21/2013	1.3
1/21/2014	0.21
7/21/2014	0.22
3/10/2015	0.24
7/20/2015	0.44

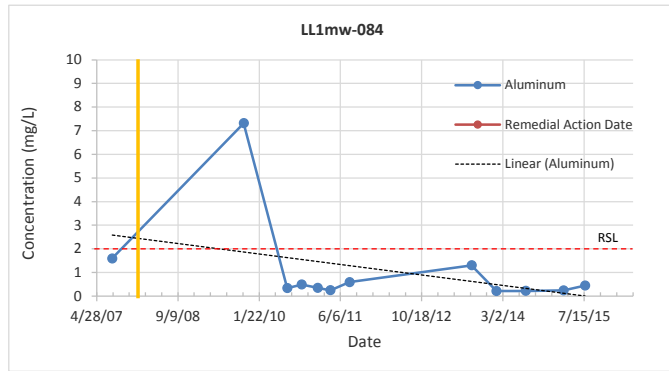

RSL = 2 mg/L
Mann-Kendall Test Using Normal Approximation for Larger Sample Size
n 12
s -24
g 0 No. tied groups
2 No. data points in each tied group
v(s) 212.667
z -1.577
Z(0.9) -1.28 (Table B-15, EM 200-1-16)
Ho: No trend
Ha: Downward trend
Reject Ho if $z < Z(0.9)$ Ho rejected at 90% level of confidence, downward trend

LL4mw-084
Barium (mg/L)

Date	Result
8/2/2007	0.0166
10/19/2009	0.0255 mean of 2 results
7/14/2010	0.014
10/11/2010	0.0158 mean of 2 results
1/17/2011	0.0183 mean of 2 results
4/5/2011	0.0169 mean of 2 results
8/1/2011	0.015
8/21/2013	0.018
1/21/2014	0.017
7/21/2014	0.016
3/10/2015	0.015
7/20/2015	0.015

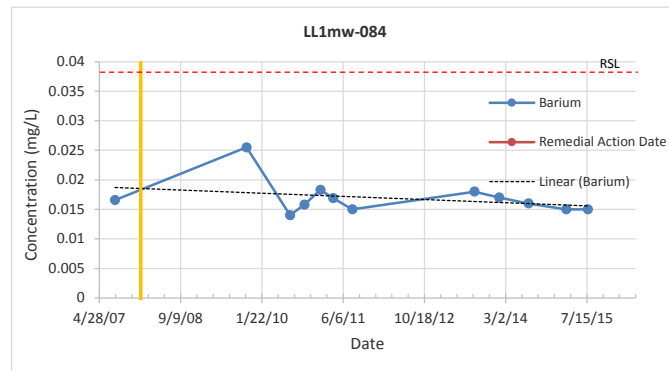


RSL = 0.38 mg/L
Mann-Kendall Test Using Normal Approximation for Larger Sample Size
n 12
s -15
g 3 No. tied groups
2 No. data points in each tied group
v(s) 158.667
z -1.111
Z(0.9) -1.28 (Table B-15, EM 200-1-16)
Ho: No trend
Ha: Downward trend
Reject Ho if $z < Z(0.9)$ Ho accepted at 90% level of confidence, no trend

Table A10-3
Load Line 1 Groundwater Trend Plots

LL4mw-084
Cadmium (mg/L)


Date	Result
8/2/2007	0.01
10/19/2009	0.0019 mean of 2 results
7/14/2010	0.0016
10/11/2010	0.002 mean of 2 results
1/17/2011	0.00185 mean of 2 results
4/5/2011	0.0015 mean of 2 results
8/1/2011	0.0015
8/21/2013	0.0014
1/21/2014	0.0012
7/21/2014	0.0017
3/10/2015	0.0017
7/20/2015	0.0023

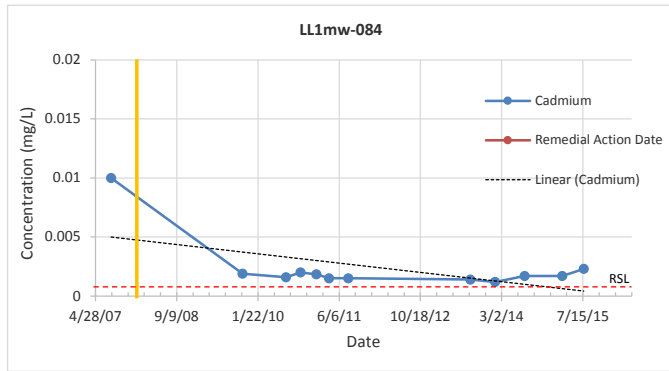

RSL = 0.00092 mg/L
Mann-Kendall Test Using Normal Approximation for Larger Sample Size
n 12
s -18
g 2 No. tied groups
2 No. data points in each tied group
v(s) 176.667
z -1.279
Z(0.9) -1.28 (Table B-15, EM 200-1-16)
Ho: No trend
Ha: Downward trend
Reject Ho if $z < Z(0.9)$ Ho accepted at 90% level of confidence, no trend

LL4mw-084
Manganese (mg/L)


Date	Result
8/2/2007	0.306
10/19/2009	0.1685 mean of 2 results
7/14/2010	0.196
10/11/2010	0.1605 mean of 2 results
1/17/2011	0.2295 mean of 2 results
4/5/2011	0.194 mean of 2 results
8/1/2011	0.17
8/21/2013	0.067
1/21/2014	0.1
7/21/2014	0.15
3/10/2015	0.14
7/20/2015	0.1

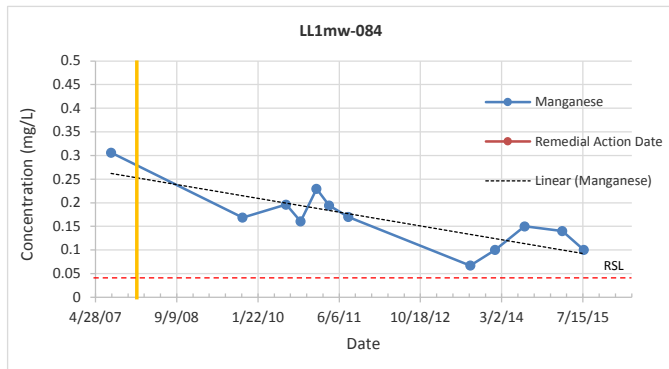

RSL = 0.043 mg/L
Mann-Kendall Test Using Normal Approximation for Larger Sample Size
n 12
s -37
v(s) 212.667
z -2.46861
Z(0.9) -1.28 (Table B-15, EM 200-1-16)
Ho: No trend
Ha: Downward trend
Reject Ho if $z < Z(0.9)$ Ho rejected at 90% level of confidence, downward trend

LL4mw-084
RDX (mg/L)

Date	Result
8/2/2007	0.00242
7/14/2010	0.00076
10/11/2010	0.0000985 mean of 2 results
1/17/2011	0.000675 mean of 2 results
4/5/2011	0.000455 mean of 2 results
8/1/2011	0.00069
8/21/2013	0.0021
1/21/2014	0.0018
7/21/2014	0.0015
3/10/2015	0.00092
7/20/2015	0.0013

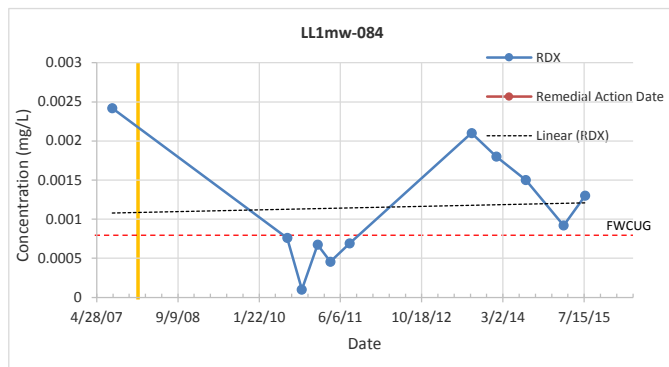

FWCUG = 0.000774 mg/L


Table A10-3
Load Line 1 Groundwater Trend Plots

LL4mw-085

Barium (mg/L)

Date	Result
8/2/2007	0.016
10/20/2009	0.01965 mean of 2 results
7/15/2010	0.0134
10/11/2010	0.0176
1/17/2011	0.0163
4/5/2011	0.022
8/1/2011	0.016

RSL = 0.38 mg/L

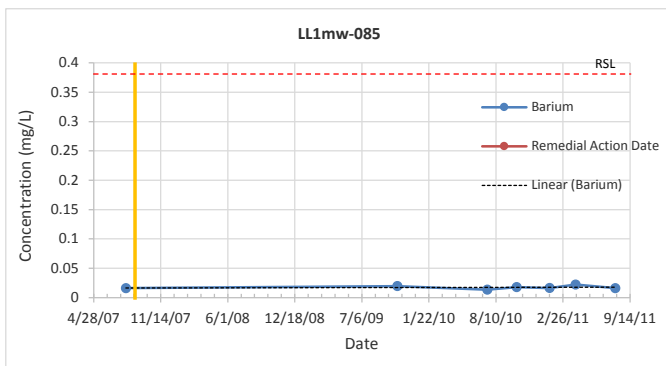


LL4mw-085

Manganese (mg/L)

Date	Result
8/2/2007	0.613
10/20/2009	0.5605 mean of 2 results
7/15/2010	0.564
10/11/2010	0.638
1/17/2011	0.179
4/5/2011	1.18
8/1/2011	0.84

RSL = 0.043 mg/L

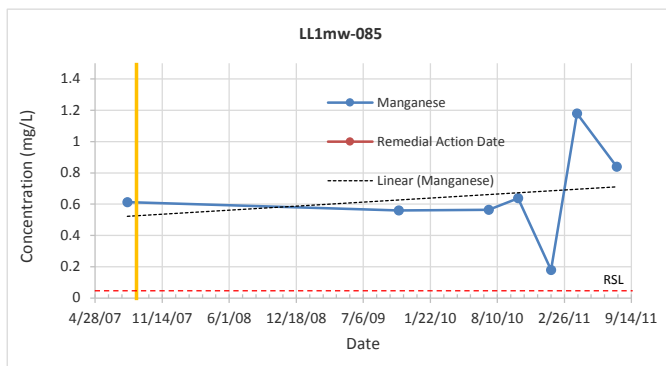

Mann-Kendall Test Using Normal Approximation for Small Sample Size

n	7
S	7
p	0.191
α	0.1
Ho:	No trend
Ha:	Upward trend
p> α	Ho rejected at 90% level of confidence; upward trend

Notes:

FWCUG = Facility Wide Cleanup Goal from EQM, 2010, *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 23

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, *Draft Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015*. February 2016

exceeds FWCUG or RSL

Load Line 2

Table A10-4
Load Line 2 Groundwater Data Summary

Well	Zone Monitored	COC	Discussion
LL2mw-262	Sandstone bedrock	Aluminum	3 samples collected after the remedial action, 1 result ND, all results < RSL
		Antimony	3 samples collected after the remedial action, all results ND
		Arsenic	3 samples collected after the remedial action, 2 results ND
		Barium	3 samples collected after the remedial action, all results < RSL
		Cadmium	3 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	3 samples collected after the remedial action, all results > RSL
		Lead	3 samples collected after the remedial action, 2 results ND, all results < RSL
		2,4,6-TNT	2 samples collected after the remedial action, all results ND
		RDX	2 samples collected after the remedial action, all results ND
		Aroclor-1254	2 samples collected after the remedial action, all results ND
		Benz(a)anthracene	2 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	2 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	2 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	2 samples collected after the remedial action, all results ND
LL2mw-263		Aluminum	3 samples collected after the remedial action, 2 results ND, all results < RSL
		Antimony	3 samples collected after the remedial action, all results ND
		Arsenic	3 samples collected after the remedial action, all results > RSL
		Barium	3 samples collected after the remedial action, all results < RSL
		Cadmium	3 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	3 samples collected after the remedial action, all results > RSL
		Lead	3 samples collected after the remedial action, 2 results ND, 1 result estimated (< detection limit)
		2,4,6-TNT	2 samples collected after the remedial action, all results ND
		RDX	2 samples collected after the remedial action, all results ND
		Aroclor-1254	2 samples collected after the remedial action, all results ND
		Benz(a)anthracene	2 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	2 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	2 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	2 samples collected after the remedial action, all results ND
LL2mw-266		Aluminum	5 samples collected after the remedial action, 2 results ND, all results < RSL
		Antimony	5 samples collected after the remedial action, all results ND
		Arsenic	5 samples collected after the remedial action, 2 results ND, all results > RSL
		Barium	5 samples collected since the remedial action, all results < RSL
		Cadmium	5 samples collected after the remedial action, 2 results ND, all results < RSL
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	3 samples collected after the remedial action, all results > RSL
		Lead	5 samples collected after the remedial action, 4 results ND, all results < RSL
		2,4,6-TNT	4 samples collected after the remedial action, all results ND
		RDX	4 samples collected after the remedial action, all results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL2mw-267		Aluminum	10 samples collected after the remedial action, 6 results ND, 9 results < RSL
		Antimony	10 samples collected after the remedial action, 9 results ND, 1 result estimated (< detection limit)
		Arsenic	10 samples collected after the remedial action, 8 results ND
		Barium	10 samples collected after the remedial action, all results < RSL, downward trend
		Cadmium	10 samples collected after the remedial action, 9 results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	10 samples collected after the remedial action, all results > RSL, downward trend
		Lead	10 samples collected after the remedial action, 9 results ND, 1 result estimated (< detection limit)
		2,4,6-TNT	9 samples collected since the remedial action, 2 results > FWCUG, no trend
		RDX	9 samples collected since the remedial action, all results > FWCUG, no trend
		Aroclor-1254	4 samples collected since the remedial action, all results ND
		Benz(a)anthracene	4 samples collected since the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected since the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected since the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected since the remedial action, all results ND
LL2mw-269		Aluminum	5 samples collected after the remedial action, 4 results ND
		Antimony	5 samples collected after the remedial action, all results ND
		Arsenic	5 samples collected after the remedial action, all results ND
		Barium	5 samples collected after the remedial action, all results < RSL, downward trend
		Cadmium	5 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	10 samples collected after the remedial action, all results > RSL, downward trend
		Lead	5 samples collected after the remedial action, all results ND
		2,4,6-TNT	4 samples collected since the remedial action, all results ND
		RDX	4 samples collected since the remedial action, all results ND
		Aroclor-1254	4 samples collected since the remedial action, all results ND
		Benz(a)anthracene	4 samples collected since the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected since the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected since the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected since the remedial action, all results ND

Table A10-4
Load Line 2 Groundwater Data Summary

Notes:

FWCUG = Facility Wide Cleanup Goal from EQM, 2010, *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 23

ND = not detected

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, Draft Facility-Wide Groundwater Monitoring Program
RVAAP-66 Facility-Wide Groundwater Annual Report for 2015. February 2016

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-262	LL2MW262-080107	8/1/2007	2,4,6-Trinitrotoluene	0.00105	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	2,4,6-Trinitrotoluene	0.00106	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	2,4,6-Trinitrotoluene	0.000098	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Aluminum	0.1	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Aluminum	0.1	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Aluminum	0.05	mg/L	UJ
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Aluminum	0.05	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Aluminum	0.639	mg/L	
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Aluminum	0.0249	mg/L	J
LL2mw-262	LL2MW262-080107	8/1/2007	Antimony	0.000315	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Antimony	0.000422	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Antimony	0.002	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Antimony	0.002	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Antimony	0.00014	mg/L	UJ
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Antimony	0.002	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Arsenic	0.000312	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Arsenic	0.000268	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Arsenic	0.005	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Arsenic	0.0375	mg/L	
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Arsenic	0.005	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Barium	0.0151	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Barium	0.0156	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Barium	0.0194	mg/L	
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Barium	0.0148	mg/L	
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Barium	0.0471	mg/L	
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Barium	0.0162	mg/L	
LL2mw-262	LL2MW262-080107	8/1/2007	Benz(a)anthracene	0.00538	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Benz(a)anthracene	0.00543	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Benzo(a)pyrene	0.00538	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Benzo(a)pyrene	0.00543	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Benzo(b)fluoranthene	0.00538	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Benzo(b)fluoranthene	0.00543	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Cadmium	0.01	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Cadmium	0.01	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Cadmium	0.0005	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Cadmium	0.00013	mg/L	UJ
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Cadmium	0.0005	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Dibenz(a,h)anthracene	0.00538	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Dibenz(a,h)anthracene	0.00543	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Lead	0.001	mg/L	

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Lead	0.001	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Lead	0.003	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Lead	0.003	mg/L	U
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Lead	0.0018	mg/L	J
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Lead	0.003	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	Manganese	0.291	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	Manganese	0.263	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GF	10/8/2007	Manganese	0.922	mg/L	
LL2mw-262	FWGLL2mw-262C-036-GF	10/19/2009	Manganese	1.12	mg/L	
LL2mw-262	FWGLL2mw-262C-036-GW	10/19/2009	Manganese	6.24	mg/L	
LL2mw-262	FWGLL2mw-262C-1534-GF	7/9/2010	Manganese	0.0774	mg/L	
LL2mw-262	LL2MW262-080107	8/1/2007	PCB-1254	0.000526	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	PCB-1254	0.000532	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	PCB-1254	0.0005	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	PCB-1254	0.0005	mg/L	U
LL2mw-262	LL2MW262-080107	8/1/2007	RDX	0.00105	mg/L	
LL2mw-262	LL2MW262DUP-080107	8/1/2007	RDX	0.00106	mg/L	
LL2mw-262	FWGLL2mw-262C-0539-GW	10/8/2007	RDX	0.00011	mg/L	U
LL2mw-262	FWGLL2mw-262C-1534-GW	7/9/2010	RDX	0.000098	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	2,4,6-Trinitrotoluene	0.00102	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	2,4,6-Trinitrotoluene	0.000098	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Aluminum	0.1	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Aluminum	0.05	mg/L	UJ
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Aluminum	0.0572	mg/L	B
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Aluminum	2.32	mg/L	
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Aluminum	0.05	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Antimony	0.001	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Antimony	0.002	mg/L	U
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Antimony	0.002	mg/L	U
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Antimony	0.00017	mg/L	UJ
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Antimony	0.002	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Arsenic	0.0104	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Arsenic	0.0168	mg/L	
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Arsenic	0.0172	mg/L	
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Arsenic	0.0227	mg/L	
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Arsenic	0.0154	mg/L	
LL2mw-263	LL2MW263-080107	8/1/2007	Barium	0.0311	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Barium	0.027	mg/L	
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Barium	0.0261	mg/L	
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Barium	0.0368	mg/L	
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Barium	0.0215	mg/L	
LL2mw-263	LL2MW263-080107	8/1/2007	Benz(a)anthracene	0.00538	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Benzo(a)pyrene	0.00538	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Benzo(b)fluoranthene	0.00538	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	Benzo(b)fluoranthene	0.0002	mg/L	U

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-263	LL2MW263-080107	8/1/2007	Cadmium	0.01	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Cadmium	0.0005	mg/L	U
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Cadmium	0.0005	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Cadmium	0.0005	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Dibenz(a,h)anthracene	0.00538	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Lead	0.001	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Lead	0.003	mg/L	U
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Lead	0.003	mg/L	U
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Lead	0.0017	mg/L	J
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Lead	0.003	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	Manganese	0.837	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GF	10/8/2007	Manganese	1.59	mg/L	
LL2mw-263	FWGLL2mw-263-037-GF	10/19/2009	Manganese	2.14	mg/L	
LL2mw-263	FWGLL2mw-263-037-GW	10/19/2009	Manganese	2.1	mg/L	
LL2mw-263	FWGLL2mw-263C-1535-GF	7/9/2010	Manganese	1.45	mg/L	
LL2mw-263	LL2MW263-080107	8/1/2007	PCB-1254	0.000521	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	PCB-1254	0.0005	mg/L	UJ
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	PCB-1254	0.0005	mg/L	U
LL2mw-263	LL2MW263-080107	8/1/2007	RDX	0.00102	mg/L	
LL2mw-263	FWGLL2mw-263C-0540-GW	10/8/2007	RDX	0.00011	mg/L	U
LL2mw-263	FWGLL2mw-263C-1535-GW	7/9/2010	RDX	0.000098	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	2,4,6-Trinitrotoluene	0.00103	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	2,4,6-Trinitrotoluene	0.00106	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	2,4,6-Trinitrotoluene	0.000099	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	2,4,6-Trinitrotoluene	0.00011	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Aluminum	0.1	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Aluminum	0.1	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Aluminum	0.05	mg/L	U
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Aluminum	5	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Aluminum	1.06	mg/L	
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Aluminum	0.0567	mg/L	
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Aluminum	0.05	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Aluminum	0.05	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Antimony	0.000452	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Antimony	0.001	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Antimony	0.002	mg/L	U
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Antimony	0.00021	mg/L	UJB
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Antimony	0.002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Antimony	0.002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Antimony	0.002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Antimony	0.002	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Arsenic	0.00488	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Arsenic	0.00554	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Arsenic	0.005	mg/L	U
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Arsenic	0.0177	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Arsenic	0.0056	mg/L	

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Arsenic	0.0042	mg/L	J
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Arsenic	0.005	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Arsenic	0.005	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Barium	0.0215	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Barium	0.0266	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Barium	0.01	mg/L	U
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Barium	0.0352	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Barium	0.0191	mg/L	
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Barium	0.0155	mg/L	
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Barium	0.021	mg/L	
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Barium	0.0139	mg/L	
LL2mw-266	LL2MW266-080107	8/1/2007	Benz(a)anthracene	0.00532	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Benz(a)anthracene	0.00532	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Benzo(a)pyrene	0.00532	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Benzo(a)pyrene	0.00532	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Benzo(b)fluoranthene	0.00532	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Benzo(b)fluoranthene	0.00532	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Cadmium	0.01	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Cadmium	0.01	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Cadmium	0.00019	mg/L	J
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Cadmium	0.00079	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Cadmium	0.00024	mg/L	J
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Cadmium	0.00014	mg/L	J
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Cadmium	0.0005	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Cadmium	0.0005	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Dibenz(a,h)anthracene	0.00532	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Dibenz(a,h)anthracene	0.00532	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-266	LL2MW266-080107	8/1/2007	Lead	0.001	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Lead	0.001	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Lead	0.003	mg/L	U
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Lead	0.006	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Lead	0.003	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Lead	0.003	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Lead	0.003	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Lead	0.003	mg/L	U

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-266	LL2MW266-080107	8/1/2007	Manganese	1.12	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	Manganese	0.982	mg/L	
LL2mw-266	FWGLL2mw-266-040-GF	10/20/2009	Manganese	0.856	mg/L	
LL2mw-266	FWGLL2mw-266-040-GW	10/20/2009	Manganese	4.37	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GF	7/9/2010	Manganese	1.39	mg/L	
LL2mw-266	FWGLL2mw-266C-1594-GF	10/11/2010	Manganese	1.25	mg/L	
LL2mw-266	FWGLL2mw-266C-1645-GF	1/18/2011	Manganese	0.936	mg/L	
LL2mw-266	FWGLL2mw-266C-1721-GF	4/7/2011	Manganese	0.761	mg/L	J
LL2mw-266	LL2MW266-080107	8/1/2007	PCB-1254	0.000549	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	PCB-1254	0.000556	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	PCB-1254	0.0005	mg/L	UJ
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	PCB-1254	0.0005	mg/L	UJ
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-266	LL2MW266-080107	8/1/2007	RDX	0.00103	mg/L	
LL2mw-266	LL2MW266DUP-080107	8/1/2007	RDX	0.00106	mg/L	
LL2mw-266	FWGLL2mw-266C-1537-GW	7/9/2010	RDX	0.0001	mg/L	U
LL2mw-266	FWGLL2mw-266C-1594-GW	10/11/2010	RDX	0.000099	mg/L	U
LL2mw-266	FWGLL2mw-266C-1645-GW	1/18/2011	RDX	0.00011	mg/L	U
LL2mw-266	FWGLL2mw-266C-1721-GW	4/7/2011	RDX	0.00011	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	2,4,6-Trinitrotoluene	0.00104	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	2,4,6-Trinitrotoluene	0.00027	mg/L	
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	2,4,6-Trinitrotoluene	0.00016	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	2,4,6-Trinitrotoluene	0.00012	mg/L	
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	2,4,6-Trinitrotoluene	0.00067	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	2,4,6-Trinitrotoluene	0.00056	mg/L	
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	2,4,6-Trinitrotoluene	0.00049	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	2,4,6-Trinitrotoluene	0.00047	mg/L	
LL2mw-267	FWGLL2mw-267C-0358-GW	8/21/2013	2,4,6-Trinitrotoluene	0.00054	mg/L	
LL2mw-267	FWGLL2mw-267c-0398-GW	1/21/2014	2,4,6-Trinitrotoluene	0.00044	mg/L	
LL2mw-267	FWGLL2mw-267C-0472-GW	7/23/2014	2,4,6-Trinitrotoluene	0.00049	mg/L	
LL2mw-267	FWGLL2mw-267C-0528-GW	3/11/2015	2,4,6-Trinitrotoluene	0.00038	mg/L	
LL2mw-267	FWGLL2mw-267C-0590-GW	7/23/2015	2,4,6-Trinitrotoluene	0.00035	mg/L	
LL2mw-267	LL2MW267-080107	8/1/2007	Aluminum	0.1	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Aluminum	0.0589	mg/L	B
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Aluminum	0.577	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Aluminum	0.05	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Aluminum	51.3	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Aluminum	43.9	mg/L	
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Aluminum	0.318	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Aluminum	0.367	mg/L	
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Aluminum	0.033	mg/L	J
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Aluminum	0.0357	mg/L	J
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Aluminum	0.06	mg/L	U
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Aluminum	0.06	mg/L	U
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Aluminum	0.06	mg/L	U
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Aluminum	0.06	mg/L	U
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Aluminum	0.06	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Antimony	0.000525	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Antimony	0.00016	mg/L	UJ
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Antimony	0.002	mg/L	U

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Antimony	0.002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Antimony	0.0006	mg/L	J
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Antimony	0.00056	mg/L	J
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Antimony	0.002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Antimony	0.002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Antimony	0.002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Antimony	0.002	mg/L	U
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Antimony	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Antimony	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Antimony	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Antimony	0.00059	mg/L	U
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Antimony	0.001	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Arsenic	0.00438	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Arsenic	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Arsenic	0.0081	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Arsenic	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Arsenic	0.137	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Arsenic	0.102	mg/L	
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Arsenic	0.005	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Arsenic	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Arsenic	0.005	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Arsenic	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Arsenic	0.01	mg/L	U
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Arsenic	0.01	mg/L	U
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Arsenic	0.01	mg/L	U
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Arsenic	0.01	mg/L	U
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Arsenic	0.01	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Barium	0.0241	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Barium	0.0196	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Barium	0.0241	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Barium	0.0149	mg/L	
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Barium	0.274	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Barium	0.248	mg/L	
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Barium	0.0149	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Barium	0.0151	mg/L	
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Barium	0.0117	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Barium	0.0117	mg/L	
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Barium	0.011	mg/L	
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Barium	0.01	mg/L	
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Barium	0.0091	mg/L	
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Barium	0.0078	mg/L	
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Barium	0.0079	mg/L	
LL2mw-267	LL2MW267-080107	8/1/2007	Benz(a)anthracene	0.005	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Benzo(a)pyrene	0.005	mg/L	

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Benzo(b)fluoranthene	0.005	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Cadmium	0.01	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Cadmium	0.00097	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Cadmium	0.00075	mg/L	
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Cadmium	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Cadmium	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Cadmium	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Cadmium	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Cadmium	0.001	mg/L	U
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Cadmium	0.001	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Dibenz(a,h)anthracene	0.005	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Lead	0.001	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Lead	0.069	mg/L	J
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Lead	0.048	mg/L	J
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Lead	0.003	mg/L	U
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Lead	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Lead	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Lead	0.005	mg/L	U

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Lead	0.005	mg/L	U
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Lead	0.005	mg/L	U
LL2mw-267	LL2MW267-080107	8/1/2007	Manganese	0.594	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GF	10/19/2009	Manganese	0.652	mg/L	
LL2mw-267	FWGLL2mw-267C-041-GW	10/19/2009	Manganese	0.673	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GF	7/9/2010	Manganese	0.622	mg/L	
LL2mw-267	FWGLL2mw-267C-1595-GF	10/12/2010	Manganese	2.85	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GF	10/12/2010	Manganese	2.24	mg/L	
LL2mw-267	FWGLL2mw-267C-1646-GF	1/18/2011	Manganese	0.547	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1694-GF	1/18/2011	Manganese	0.551	mg/L	
LL2mw-267	FWGLL2mw-267C-1722-GF	4/7/2011	Manganese	0.564	mg/L	J
LL2mw-267	FWGLL2mw-DUP3-1748-GF	4/7/2011	Manganese	0.568	mg/L	J
LL2mw-267	FWGLL2mw-267C-0358-GF	8/21/2013	Manganese	0.49	mg/L	
LL2mw-267	FWGLL2mw-267c-0398-GF	1/21/2014	Manganese	0.45	mg/L	J
LL2mw-267	FWGLL2mw-267C-0472-GF	7/23/2014	Manganese	0.49	mg/L	
LL2mw-267	FWGLL2mw-267C-0528-GF	3/11/2015	Manganese	0.49	mg/L	
LL2mw-267	FWGLL2mw-267C-0590-GF	7/23/2015	Manganese	0.46	mg/L	
LL2mw-267	LL2MW267-080107	8/1/2007	PCB-1254	0.000532	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	PCB-1254	0.0005	mg/L	U
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	PCB-1254	0.0005	mg/L	UJ
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	PCB-1254	0.0005	mg/L	UJ
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-267	LL2MW267-080107	8/1/2007	RDX	0.00104	mg/L	
LL2mw-267	FWGLL2mw-267C-1565-GW	7/9/2010	RDX	0.0011	mg/L	
LL2mw-267	FWGLL2mw-267C-1595-GW	10/12/2010	RDX	0.00093	mg/L	
LL2mw-267	FWGLL2mw-DUP3-1627-GW	10/12/2010	RDX	0.00086	mg/L	J
LL2mw-267	FWGLL2mw-267C-1646-GW	1/18/2011	RDX	0.0017	mg/L	J
LL2mw-267	FWGLL2mw-DUP3-1694-GW	1/18/2011	RDX	0.0015	mg/L	J
LL2mw-267	FWGLL2mw-267C-1722-GW	4/7/2011	RDX	0.0013	mg/L	J
LL2mw-267	FWGLL2mw-DUP3-1748-GW	4/7/2011	RDX	0.0014	mg/L	
LL2mw-267	FWGLL2mw-267C-0358-GW	8/21/2013	RDX	0.0015	mg/L	
LL2mw-267	FWGLL2mw-267c-0398-GW	1/21/2014	RDX	0.0013	mg/L	
LL2mw-267	FWGLL2mw-267C-0472-GW	7/23/2014	RDX	0.0014	mg/L	
LL2mw-267	FWGLL2mw-267C-0528-GW	3/11/2015	RDX	0.0011	mg/L	
LL2mw-267	FWGLL2mw-267C-0590-GW	7/23/2015	RDX	0.0013	mg/L	
LL2mw-269	LL2MW269-073107	7/31/2007	2,4,6-Trinitrotoluene	0.00104	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	2,4,6-Trinitrotoluene	0.000098	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	2,4,6-Trinitrotoluene	0.000096	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL2mw-269	LL2MW269-073107	7/31/2007	Aluminum	0.1	mg/L	
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Aluminum	0.05	mg/L	U
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Aluminum	0.448	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Aluminum	0.05	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Aluminum	0.05	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Aluminum	0.05	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Aluminum	0.05	mg/L	U
LL2mw-269	LL2MW269-073107	7/31/2007	Antimony	0.001	mg/L	

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Antimony	0.002	mg/L	U
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Antimony	0.002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Antimony	0.002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Antimony	0.002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Antimony	0.002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Antimony	0.002	mg/L	U
LL2mw-269	LL2MW269-073107	7/31/2007	Arsenic	0.000623	mg/L	
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Arsenic	0.005	mg/L	U
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Arsenic	0.0041	mg/L	J
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Arsenic	0.005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Arsenic	0.005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Arsenic	0.005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Arsenic	0.005	mg/L	U
LL2mw-269	LL2MW269-073107	7/31/2007	Barium	0.263	mg/L	
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Barium	0.23	mg/L	
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Barium	0.289	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Barium	0.215	mg/L	
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Barium	0.216	mg/L	
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Barium	0.232	mg/L	
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Barium	0.218	mg/L	
LL2mw-269	LL2MW269-073107	7/31/2007	Benz(a)anthracene	0.00521	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	Benz(a)anthracene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	Benz(a)anthracene	0.0002	mg/L	UJ
LL2mw-269	LL2MW269-073107	7/31/2007	Benzo(a)pyrene	0.00521	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	Benzo(a)pyrene	0.0002	mg/L	UJ
LL2mw-269	LL2MW269-073107	7/31/2007	Benzo(b)fluoranthene	0.00521	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	Benzo(b)fluoranthene	0.0002	mg/L	UJ
LL2mw-269	LL2MW269-073107	7/31/2007	Cadmium	0.01	mg/L	
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Cadmium	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Cadmium	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Cadmium	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Cadmium	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Cadmium	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Cadmium	0.0005	mg/L	U
LL2mw-269	LL2MW269-073107	7/31/2007	Dibenz(a,h)anthracene	0.00521	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	Dibenz(a,h)anthracene	0.0002	mg/L	UJ
LL2mw-269	LL2MW269-073107	7/31/2007	Lead	0.000423	mg/L	
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Lead	0.003	mg/L	U
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Lead	0.003	mg/L	U
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Lead	0.003	mg/L	U

Table A10-5
Load Line 2 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Lead	0.003	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Lead	0.003	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Lead	0.003	mg/L	U
LL2mw-269	LL2MW269-073107	7/31/2007	Manganese	1.78	mg/L	
LL2mw-269	FWGLL2mw-269-043-GF	10/20/2009	Manganese	1.77	mg/L	
LL2mw-269	FWGLL2mw-269-043-GW	10/20/2009	Manganese	1.75	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GF	7/15/2010	Manganese	1.54	mg/L	
LL2mw-269	FWGLL2mw-269C-1596-GF	10/12/2010	Manganese	1.52	mg/L	
LL2mw-269	FWGLL2mw-269C-1647-GF	1/18/2011	Manganese	1.57	mg/L	
LL2mw-269	FWGLL2mw-269C-1723-GF	4/7/2011	Manganese	1.59	mg/L	J
LL2mw-269	LL2MW269-073107	7/31/2007	PCB-1254	0.00051	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	PCB-1254	0.0005	mg/L	UJ
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	PCB-1254	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	PCB-1254	0.0005	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	PCB-1254	0.0005	mg/L	UJ
LL2mw-269	LL2MW269-073107	7/31/2007	RDX	0.00104	mg/L	
LL2mw-269	FWGLL2mw-269C-1538-GW	7/15/2010	RDX	0.000098	mg/L	U
LL2mw-269	FWGLL2mw-269C-1596-GW	10/12/2010	RDX	0.000096	mg/L	U
LL2mw-269	FWGLL2mw-269C-1647-GW	1/18/2011	RDX	0.0001	mg/L	U
LL2mw-269	FWGLL2mw-269C-1723-GW	4/7/2011	RDX	0.0001	mg/L	U


Table A10-6
Load Line 2 Groundwater Trend Plots

LL2mw-262

Barium (mg/L)

Date	Result	
8/1/2007	0.0156	mean of 2 results
10/8/2007	0.0194	
10/19/2009	0.0471	mean of 2 results
7/9/2010	0.0162	

RSL = 0.38

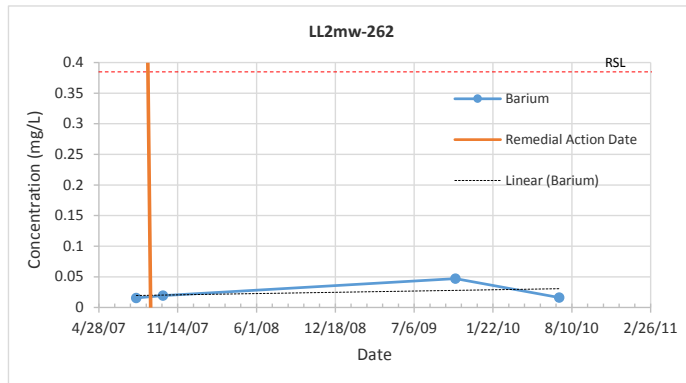


LL2mw-262

Manganese (mg/L)

Date	Result	
8/1/2007		mean of 2 results
10/8/2007		
10/19/2009		mean of 2 results
7/9/2010		

RSL = 0.043

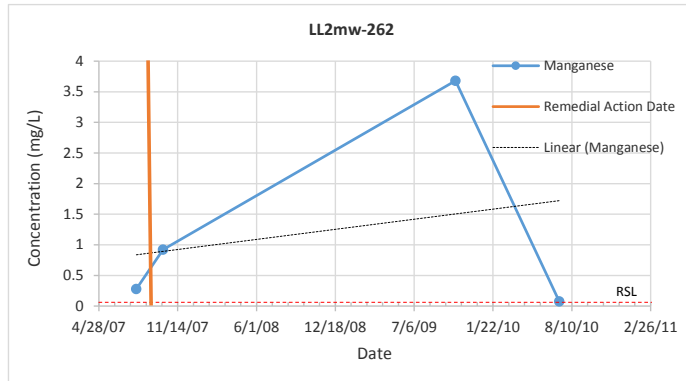


LL2mw-263

Arsenic (mg/L)

Date	Result	
8/1/2007	0.0104	
10/8/2007	0.0168	
10/19/2009	0.01995	mean of 2 results
7/9/2010	0.0154	

RSL = 0.000521

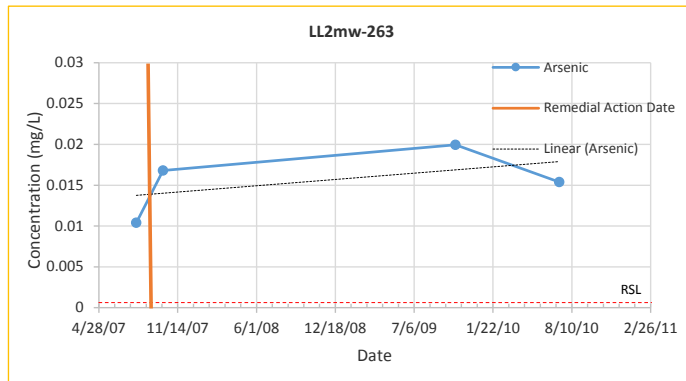

LL2mw-263

Barium (mg/L)

Date	Result	
8/1/2007	0.0311	
10/8/2007	0.027	
10/19/2009	0.0261	mean of 2 results
7/9/2010	0.0215	

RSL = 0.38

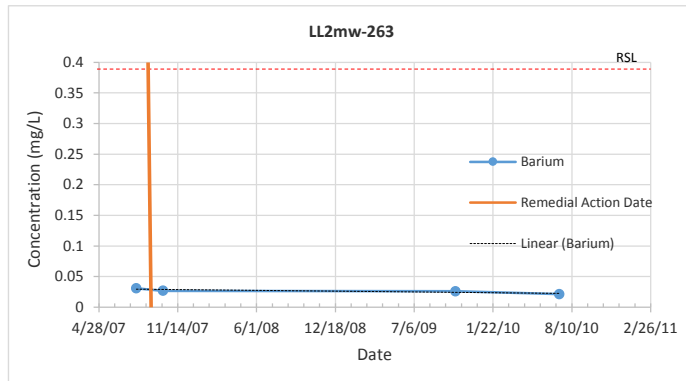



Table A10-6
Load Line 2 Groundwater Trend Plots

LL2mw-263

Manganese (mg/L)

Date	Result
8/1/2007	0.837
10/8/2007	1.59
10/19/2009	2.12 mean of 2 results
7/9/2010	1.45

RSL = 0.043

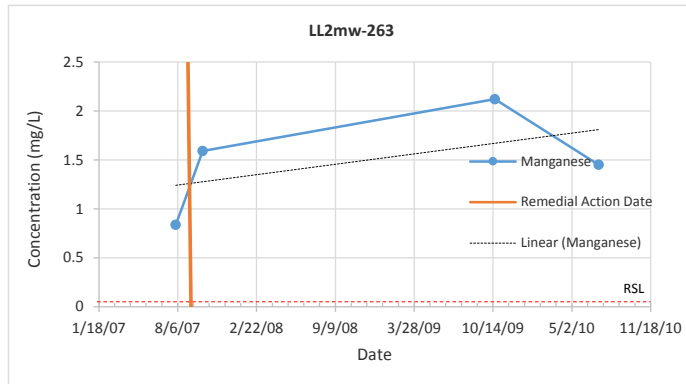


LL2mw-266

Arsenic (mg/L)

Date	Result
8/1/2007	0.00521 mean of 2 results
10/20/2009	0.01135 mean of 2 results
7/9/2010	0.0056
10/11/2010	0.0042
1/18/2011	0 ND
4/7/2011	0 ND

RSL = 0.000521

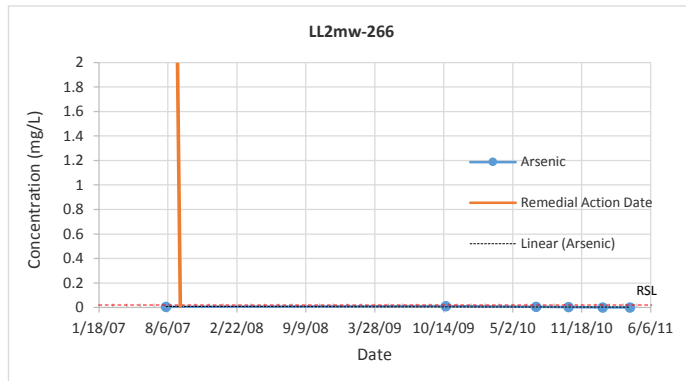


LL2mw-266

Barium (mg/L)

Date	Result
8/1/2007	0.02405 mean of 2 results
10/20/2009	0.0226 mean of 2 results
7/9/2010	0.0191
10/11/2010	0.0155
1/18/2011	0.021
4/7/2011	0.0139

RSL = 0.38

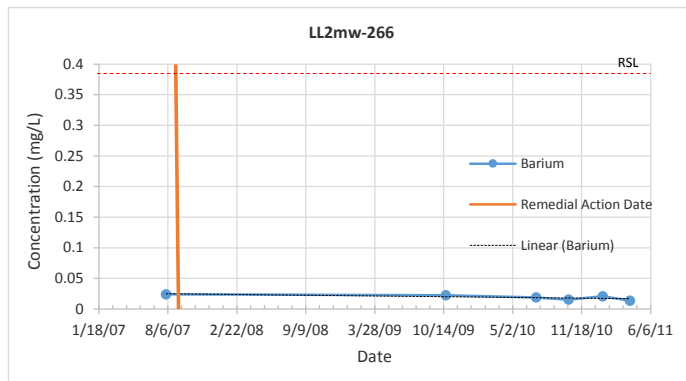

LL2mw-266

Manganese (mg/L)

Date	Result
8/1/2007	1.051 mean of 2 results
10/20/2009	2.613 mean of 2 results
7/9/2010	1.39
10/11/2010	1.25
1/18/2011	0.936
4/7/2011	0.761

RSL = 0.043

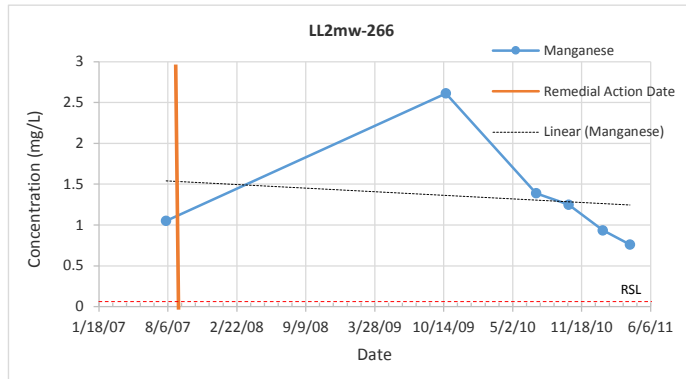



Table A10-6
Load Line 2 Groundwater Trend Plots

LL2mw-267

2,4,6-TNT (mg/L)

Date	Result
8/1/2007	0.00104
7/9/2010	0.00027
10/12/2010	0.00014 mean of 2 results
1/18/2011	0.000615 mean of 2 results
4/7/2011	0.00048 mean of 2 results
8/21/2013	0.00054
1/21/2014	0.00044
7/23/2014	0.00049
3/11/2015	0.00038
7/23/2015	0.00035

FWCUG = 0.000521

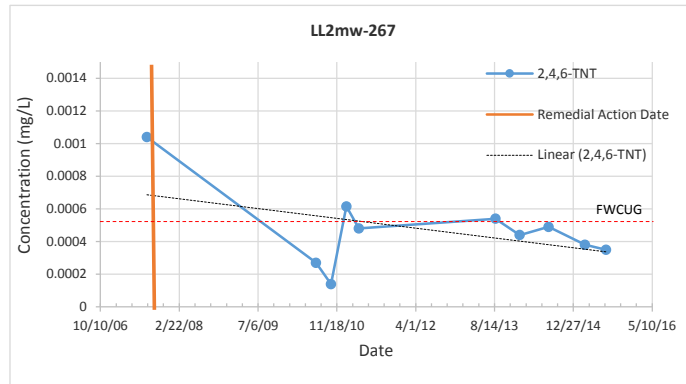

Mann-Kendall Test Using Normal Approximation for Larger Sample Size


n 10
s -11
g 0 No. tied groups
2 No. data points in each tied group
v(s) 125.0
z -0.894
Z(0.9) -1.28 (Table B-15, EM 200-1-16)
Ho: No trend
Ha: Downward trend
Reject Ho if $z < Z(0.9)$ Ho accepted at 90% level of confidence, no trend

LL2mw-267

RDX (mg/L)

Date	Result
8/1/2007	0.00104
7/9/2010	0.0011
10/12/2010	0.000895 mean of 2 results
1/18/2011	0.0016 mean of 2 results
4/7/2011	0.00135 mean of 2 results
8/21/2013	0.0015
1/21/2014	0.0013
7/23/2014	0.0014
3/11/2015	0.0011
7/23/2015	0.0013

FWCUG = 0.000774

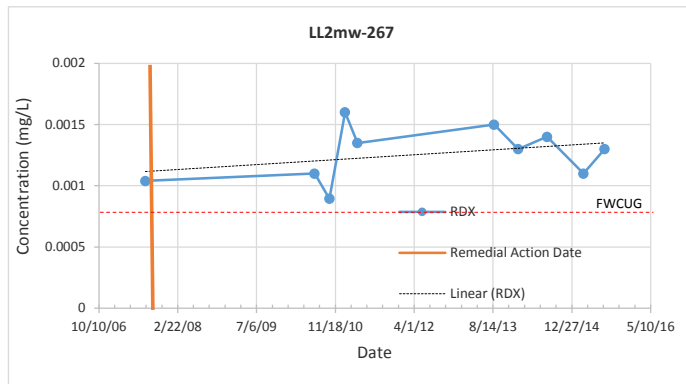

Mann-Kendall Test Using Normal Approximation for Larger Sample Size

n 10
s 7
g 2 No. tied groups
2 No. data points in each tied group
v(s) 89.0
z 0.848
Z(0.9) 1.28 (Table B-15, EM 200-1-16)
Ho: No trend
Ha: Upward trend
Reject Ho if $z > Z(0.9)$ Ho accepted at 90% level of confidence, no trend

LL2mw-267

Aluminum (mg/L)

Date	Result
8/1/2007	0.1
10/19/2009	0.31795 mean of 2 results
7/9/2010	0 ND
10/12/2010	47.6 mean of 2 results
1/18/2011	0.3425 mean of 2 results
4/7/2011	0.03435 mean of 2 results
8/21/2013	0 ND
1/21/2014	0 ND
7/23/2014	0 ND
3/11/2015	0 ND
7/23/2015	0 ND

RSL = 2 mg/L

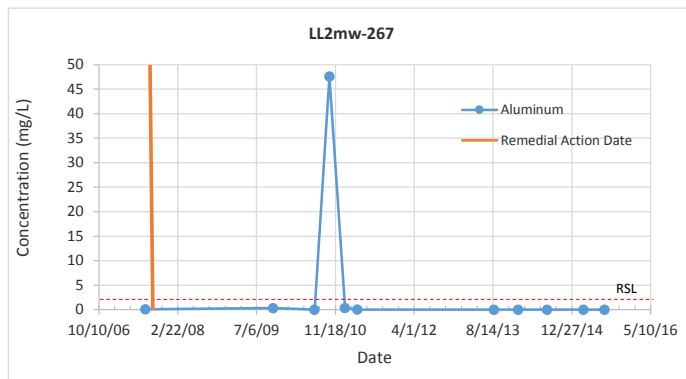



Table A10-6 Load Line 2 Groundwater Trend Plots

LL2mw-267

Barium (mg/L)

Date	Result
8/1/2007	0.0241
10/19/2009	0.02185 mean of 2 results
7/9/2010	0.0149
10/12/2010	0.261 mean of 2 results
1/18/2011	0.015 mean of 2 results
4/7/2011	0.0117 mean of 2 results
8/21/2013	0.011
1/21/2014	0.01
7/23/2014	0.0091
3/11/2015	0.0078
7/23/2015	0.0079

RSL = 0.38 mg/L

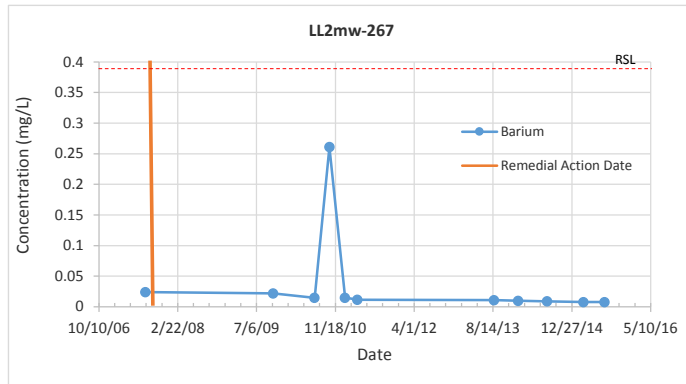

Mann-Kendall Test Using Normal Approximation for Larger Sample Size


n	11
s	-45
g	0 No. tied groups
	2 No. data points in each tied group
v(s)	165.0
z	-3.425
Z(0.9)	-1.28 (Table B-15, EM 200-1-16)
Ho:	No trend
Ha:	Downward trend
Reject Ho if $z < Z(0.9)$	Ho rejected at 90% level of confidence, downward trend

LL2mw-267

Manganese (mg/L)

Date	Result
8/1/2007	0.594
10/19/2009	0.6625 mean of 2 results
7/9/2010	0.622
10/12/2010	2.545 mean of 2 results
1/18/2011	0.549 mean of 2 results
4/7/2011	0.566 mean of 2 results
8/21/2013	0.49
1/21/2014	0.45
7/23/2014	0.49
3/11/2015	0.49
7/23/2015	0.46

RSL = 0.043 mg/L

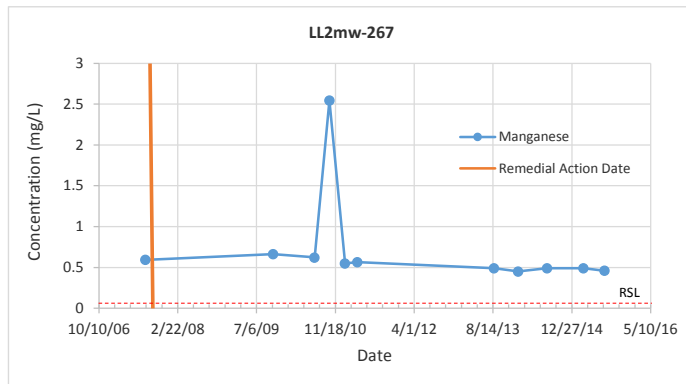

Mann-Kendall Test Using Normal Approximation for Larger Sample Size

n	11
s	-34
g	3 No. tied groups
	2 No. data points in each tied group
v(s)	111.0
z	-3.132
Z(0.9)	-1.28 (Table B-15, EM 200-1-16)
Ho:	No trend
Ha:	Downward trend
Reject Ho if $z < Z(0.9)$	Ho rejected at 90% level of confidence, downward trend

LL2mw-269

Barium (mg/L)

Date	Result
7/31/2007	0.263
10/20/2009	0.2595 mean of 2 results
7/15/2010	0.215
10/12/2010	0.216
1/18/2011	0.232
4/7/2011	0.218

RSL = 0.38 mg/L

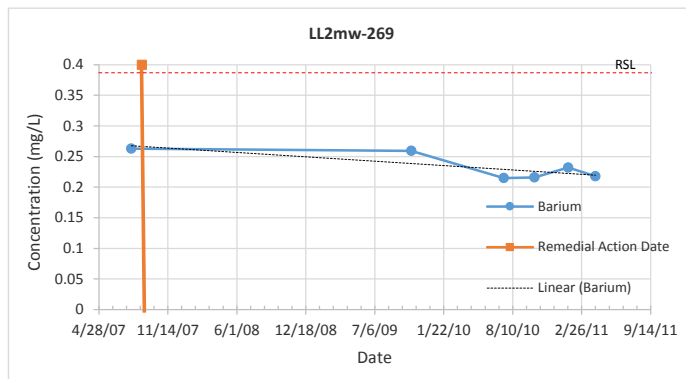


Table A10-6
Load Line 2 Groundwater Trend Plots

Mann-Kendall Test Using Normal Approximation for Small Sample Size


n	6
S	-5
p	-0.235
α	-0.1
Ho:	No trend
Ha:	Downward trend
p> α	Ho rejected at 90% level of confidence; downward trend

LL2mw-269

Manganese (mg/L)

Date	Result
7/31/2007	1.78
10/20/2009	1.76 mean of 2 results
7/15/2010	1.54
10/12/2010	1.52
1/18/2011	1.57
4/7/2011	1.59

RSL = 0.043 mg/L

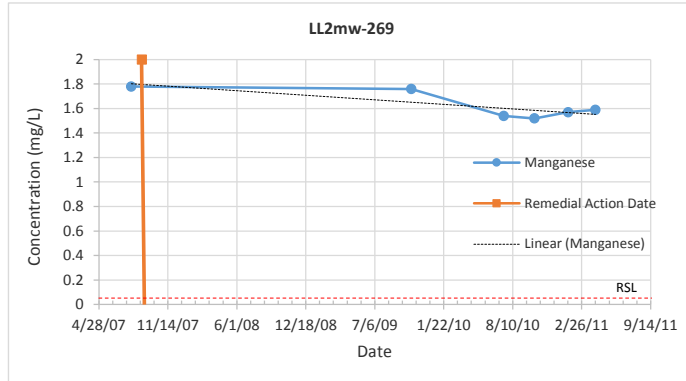

Mann-Kendall Test Using Normal Approximation for Small Sample Size

n	6
S	-5
p	-0.235
α	-0.1
Ho:	No trend
Ha:	Downward trend
p> α	Ho rejected at 90% level of confidence; downward trend

Notes:

FWCUG = Facility Wide Cleanup Goal from EQM, 2010, *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 23

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, *Draft Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015*. February 2016

Exceeds FWCUG or RSL

Load Line 3

[This page intentionally left blank]

Table A10-7
Load Line 3 Groundwater Data Summary

Well	Zone Monitored	COC	Discussion
LL3mw-236	Sandstone bedrock	Aluminum	6 samples collected after the remedial action, 4 results ND
		Antimony	6 samples collected after the remedial action, 5 results ND
		Arsenic	6 samples collected after the remedial action, all results ND
		Barium	6 samples collected after the remedial action, 4 results ND
		Cadmium	6 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	6 samples collected after the remedial action, all results > RSL, downward trend
		Lead	6 samples collected after the remedial action, all results ND
		2,4,6-TNT	5 samples collected after the remedial action, 1 result > FWCUG, downward trend
		RDX	5 samples collected after the remedial action, all results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL3mw-238	Sandstone bedrock	Aluminum	9 samples collected after the remedial action, 7 results ND
		Antimony	9 samples collected after the remedial action, 8 results ND
		Arsenic	9 samples collected after the remedial action, 8 results ND
		Barium	9 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	9 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	9 samples collected after the remedial action, 4 results ND, 2 results estimated (< detection limit)
		Lead	9 samples collected after the remedial action, 8 results ND
		2,4,6-TNT	8 samples collected after the remedial action, all results > FWCUG, downward trend
		RDX	8 samples collected after the remedial action, all results > FWCUG, downward trend
		Aroclor-1254	2 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL3mw-239	Sandstone bedrock	Aluminum	5 samples collected after the remedial action, 2 results ND, all results < RSL
		Antimony	5 samples collected after the remedial action, all results ND
		Arsenic	5 samples collected after the remedial action, 2 results ND, 2 results estimated (< detection limit)
		Barium	5 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	5 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	5 samples collected after the remedial action, all results > RSL, downward trend
		Lead	5 samples collected after the remedial action, 4 results ND
		2,4,6-TNT	4 samples collected after the remedial action, all results < FWCUG, downward trend
		RDX	4 samples collected after the remedial action, 4 results > FWCUG, upward trend
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND

Notes:

FWCUG = Facility Wide Cleanup Goal from EQM, 2010, *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 23

ND = not detected

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, *Draft Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015*. February 2016

Table A10-8
Load Line 3 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL3mw-236	LL3MW236-073107	7/31/2007	2,4,6-Trinitrotoluene	0.00105	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	2,4,6-Trinitrotoluene	0.00031	mg/L	J
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	2,4,6-Trinitrotoluene	0.00017	mg/L	
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	2,4,6-Trinitrotoluene	0.000084	mg/L	J
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	2,4,6-Trinitrotoluene	0.00018	mg/L	
LL3mw-236	FWGLL3mw-236C-1775-GW	8/4/2011	2,4,6-Trinitrotoluene	0.00037	mg/L	
LL3mw-236	LL3MW236-073107	7/31/2007	Aluminum	0.1	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Aluminum	0.05	mg/L	U
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Aluminum	0.05	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Aluminum	0.05	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Aluminum	0.05	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Aluminum	0.05	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Aluminum	0.05	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Aluminum	0.04	mg/L	B
LL3mw-236	LL3MW236-073107	7/31/2007	Antimony	0.001	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Antimony	0.002	mg/L	U
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Antimony	0.002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Antimony	0.00015	mg/L	J
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Antimony	0.002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Antimony	0.002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Antimony	0.002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Antimony	0.002	mg/L	U
LL3mw-236	LL3MW236-073107	7/31/2007	Arsenic	0.000277	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Arsenic	0.005	mg/L	U
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Arsenic	0.005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Arsenic	0.005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Arsenic	0.005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Arsenic	0.005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Arsenic	0.005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Arsenic	0.005	mg/L	U
LL3mw-236	LL3MW236-073107	7/31/2007	Barium	0.01	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Barium	0.01	mg/L	U
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Barium	0.0095	mg/L	J
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Barium	0.01	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Barium	0.01	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Barium	0.01	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Barium	0.01	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Barium	0.003	mg/L	B
LL3mw-236	LL3MW236-073107	7/31/2007	Benz(a)anthracene	0.00526	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	Benz(a)anthracene	0.0002	mg/L	UJ
LL3mw-236	LL3MW236-073107	7/31/2007	Benzo(a)pyrene	0.00526	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	Benzo(a)pyrene	0.0002	mg/L	UJ
LL3mw-236	LL3MW236-073107	7/31/2007	Benzo(b)fluoranthene	0.00526	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U

Table A10-8
Load Line 3 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	Benzo(b)fluoranthene	0.0002	mg/L	UJ
LL3mw-236	LL3MW236-073107	7/31/2007	Cadmium	0.01	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Cadmium	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Cadmium	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Cadmium	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Cadmium	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Cadmium	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Cadmium	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Cadmium	0.0005	mg/L	U
LL3mw-236	LL3MW236-073107	7/31/2007	Dibenz(a,h)anthracene	0.00526	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	Dibenz(a,h)anthracene	0.0002	mg/L	UJ
LL3mw-236	LL3MW236-073107	7/31/2007	Lead	0.001	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Lead	0.003	mg/L	U
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Lead	0.003	mg/L	U
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Lead	0.003	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Lead	0.003	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Lead	0.003	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Lead	0.003	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Lead	0.003	mg/L	U
LL3mw-236	LL3MW236-073107	7/31/2007	Manganese	0.599	mg/L	
LL3mw-236	FWGLL3mw-236-049-GF	10/20/2009	Manganese	0.0039	mg/L	J
LL3mw-236	FWGLL3mw-236-049-GW	10/20/2009	Manganese	2.13	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GF	7/8/2010	Manganese	0.235	mg/L	
LL3mw-236	FWGLL3mw-236C-1597-GF	10/12/2010	Manganese	0.24	mg/L	
LL3mw-236	FWGLL3mw-236C-1648-GF	1/18/2011	Manganese	0.129	mg/L	
LL3mw-236	FWGLL3mw-236C-1724-GF	4/7/2011	Manganese	0.344	mg/L	J
LL3mw-236	FWGLL3mw-236C-1775-GF	8/4/2011	Manganese	0.97	mg/L	
LL3mw-236	LL3MW236-073107	7/31/2007	PCB-1254	0.000562	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	PCB-1254	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	PCB-1254	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	PCB-1254	0.0005	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	PCB-1254	0.0005	mg/L	UJ
LL3mw-236	LL3MW236-073107	7/31/2007	RDX	0.00105	mg/L	
LL3mw-236	FWGLL3mw-236C-1542-GW	7/8/2010	RDX	0.000098	mg/L	U
LL3mw-236	FWGLL3mw-236C-1597-GW	10/12/2010	RDX	0.00011	mg/L	U
LL3mw-236	FWGLL3mw-236C-1648-GW	1/18/2011	RDX	0.0001	mg/L	U
LL3mw-236	FWGLL3mw-236C-1724-GW	4/7/2011	RDX	0.0001	mg/L	U
LL3mw-236	FWGLL3mw-236C-1775-GW	8/4/2011	RDX	0.0001	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	2,4,6-Trinitrotoluene	0.0642	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	2,4,6-Trinitrotoluene	0.096	mg/L	J
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	2,4,6-Trinitrotoluene	0.069	mg/L	
LL3mw-238	FWGLL3mw-238C-1776-GW	8/3/2011	2,4,6-Trinitrotoluene	0.095	mg/L	J
LL3mw-238	FWGLL3mw-238C-0359-GW	8/19/2013	2,4,6-Trinitrotoluene	0.079	mg/L	
LL3mw-238	FWGLL3mw-238C-0400-GW	1/21/2014	2,4,6-Trinitrotoluene	0.12	mg/L	J
LL3mw-238	FWGLL3mw-238C-0474-GW	7/23/2014	2,4,6-Trinitrotoluene	0.062	mg/L	
LL3mw-238	FWGLL3mw-238C-0530-GW	3/11/2015	2,4,6-Trinitrotoluene	0.045	mg/L	J
LL3mw-238	FWGLL3mw-238C-0592-GW	7/20/2015	2,4,6-Trinitrotoluene	0.055	mg/L	J

Table A10-8
Load Line 3 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL3mw-238	LL3MW238-073107	7/31/2007	Aluminum	0.1	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Aluminum	0.0165	mg/L	J
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Aluminum	0.0583	mg/L	
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Aluminum	5.84	mg/L	
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Aluminum	0.05	mg/L	U
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Aluminum	0.05	mg/L	UJ
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Aluminum	0.027	mg/L	J
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Aluminum	0.06	mg/L	U
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Aluminum	0.06	mg/L	U
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Aluminum	0.06	mg/L	U
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Aluminum	0.079	mg/L	
LL3mw-238	LL3MW238-073107	7/31/2007	Antimony	0.001	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Antimony	0.002	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Antimony	0.002	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Antimony	0.00026	mg/L	J
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Antimony	0.002	mg/L	U
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Antimony	0.002	mg/L	U
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Antimony	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Antimony	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Antimony	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Antimony	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Antimony	0.001	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Arsenic	0.000434	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Arsenic	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Arsenic	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Arsenic	0.0117	mg/L	
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Arsenic	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Arsenic	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Arsenic	0.01	mg/L	U
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Arsenic	0.01	mg/L	U
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Arsenic	0.01	mg/L	U
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Arsenic	0.01	mg/L	U
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Arsenic	0.01	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Barium	0.01	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Barium	0.0067	mg/L	J
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Barium	0.0108	mg/L	
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Barium	0.0416	mg/L	
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Barium	0.0089	mg/L	J
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Barium	0.0084	mg/L	J
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Barium	0.0079	mg/L	
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Barium	0.0081	mg/L	
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Barium	0.0073	mg/L	
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Barium	0.0051	mg/L	
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Barium	0.0076	mg/L	B
LL3mw-238	LL3MW238-073107	7/31/2007	Benz(a)anthracene	0.0051	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Benzo(a)pyrene	0.0051	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Benzo(b)fluoranthene	0.0051	mg/L	

Table A10-8
Load Line 3 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Cadmium	0.01	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Cadmium	0.0005	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Cadmium	0.0005	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Cadmium	0.0005	mg/L	U
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Cadmium	0.0005	mg/L	U
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Cadmium	0.0005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Cadmium	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Cadmium	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Cadmium	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Cadmium	0.001	mg/L	U
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Cadmium	0.001	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Lead	0.001	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Lead	0.003	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Lead	0.003	mg/L	U
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Lead	0.0056	mg/L	
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Lead	0.003	mg/L	U
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Lead	0.003	mg/L	U
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Lead	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Lead	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Lead	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Lead	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Lead	0.005	mg/L	U
LL3mw-238	LL3MW238-073107	7/31/2007	Manganese	0.01	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GF	10/8/2007	Manganese	0.0019	mg/L	J
LL3mw-238	FWGLL3mw-238C-051-GF	10/20/2009	Manganese	0.0056	mg/L	J
LL3mw-238	FWGLL3mw-238C-051-GW	10/20/2009	Manganese	0.279	mg/L	
LL3mw-238	FWGLL3mw-238C-1650-GF	1/19/2011	Manganese	0.01	mg/L	U
LL3mw-238	FWGLL3mw-238C-1776-GF	8/3/2011	Manganese	0.0012	mg/L	J
LL3mw-238	FWGLL3mw-238C-0359-GF	8/19/2013	Manganese	0.0026	mg/L	B
LL3mw-238	FWGLL3mw-238C-0400-GF	1/21/2014	Manganese	0.005	mg/L	UJ
LL3mw-238	FWGLL3mw-238C-0474-GF	7/23/2014	Manganese	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0530-GF	3/11/2015	Manganese	0.005	mg/L	U
LL3mw-238	FWGLL3mw-238C-0592-GF	7/20/2015	Manganese	0.0031	mg/L	B
LL3mw-238	LL3MW238-073107	7/31/2007	PCB-1254	0.00051	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	PCB-1254	0.0005	mg/L	UJ
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	PCB-1254	0.0005	mg/L	UJ
LL3mw-238	LL3MW238-073107	7/31/2007	RDX	0.00842	mg/L	
LL3mw-238	FWGLL3mw-238C-0541-GW	10/8/2007	RDX	0.0066	mg/L	J
LL3mw-238	FWGLL3mw-238C-1650-GW	1/19/2011	RDX	0.011	mg/L	J
LL3mw-238	FWGLL3mw-238C-1776-GW	8/3/2011	RDX	0.0048	mg/L	J
LL3mw-238	FWGLL3mw-238C-0359-GW	8/19/2013	RDX	0.0072	mg/L	
LL3mw-238	FWGLL3mw-238C-0400-GW	1/21/2014	RDX	0.0058	mg/L	J
LL3mw-238	FWGLL3mw-238C-0474-GW	7/23/2014	RDX	0.0064	mg/L	J
LL3mw-238	FWGLL3mw-238C-0530-GW	3/11/2015	RDX	0.0045	mg/L	J
LL3mw-238	FWGLL3mw-238C-0592-GW	7/20/2015	RDX	0.0068	mg/L	J
LL3mw-239	LL3MW239-073007	7/30/2007	2,4,6-Trinitrotoluene	0.00105	mg/L	

Table A10-8
Load Line 3 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	2,4,6-Trinitrotoluene	0.00026	mg/L	J
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	2,4,6-Trinitrotoluene	0.00019	mg/L	
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	2,4,6-Trinitrotoluene	0.00015	mg/L	
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	2,4,6-Trinitrotoluene	0.0002	mg/L	
LL3mw-239	LL3MW239-073007	7/30/2007	Aluminum	0.1	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Aluminum	0.0384	mg/L	J
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Aluminum	1.36	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Aluminum	0.0466	mg/L	J
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Aluminum	0.05	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Aluminum	0.394	mg/L	
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Aluminum	0.05	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Antimony	0.00053	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Antimony	0.002	mg/L	U
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Antimony	0.00013	mg/L	UJ
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Antimony	0.002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Antimony	0.002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Antimony	0.002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Antimony	0.002	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Arsenic	0.000981	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Arsenic	0.005	mg/L	U
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Arsenic	0.0134	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Arsenic	0.005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Arsenic	0.0039	mg/L	J
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Arsenic	0.005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Arsenic	0.0036	mg/L	J
LL3mw-239	LL3MW239-073007	7/30/2007	Barium	0.0133	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Barium	0.0122	mg/L	
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Barium	0.0205	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Barium	0.0104	mg/L	
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Barium	0.0147	mg/L	
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Barium	0.0192	mg/L	
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Barium	0.0111	mg/L	
LL3mw-239	LL3MW239-073007	7/30/2007	Benz(a)anthracene	0.00521	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	Benz(a)anthracene	0.0002	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Benzo(a)pyrene	0.00521	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Benzo(b)fluoranthene	0.00521	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Cadmium	0.01	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Cadmium	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Cadmium	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Cadmium	0.0005	mg/L	U

Table A10-8
Load Line 3 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Cadmium	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Cadmium	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Cadmium	0.0005	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Dibenz(a,h)anthracene	0.00521	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Lead	0.001	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Lead	0.003	mg/L	U
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Lead	0.0018	mg/L	J
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Lead	0.003	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Lead	0.003	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Lead	0.003	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Lead	0.003	mg/L	U
LL3mw-239	LL3MW239-073007	7/30/2007	Manganese	0.413	mg/L	
LL3mw-239	FWGLL3mw-239-052-GF	10/20/2009	Manganese	0.137	mg/L	
LL3mw-239	FWGLL3mw-239-052-GW	10/20/2009	Manganese	0.125	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GF	7/8/2010	Manganese	0.101	mg/L	
LL3mw-239	FWGLL3mw-239C-1598-GF	10/12/2010	Manganese	0.175	mg/L	
LL3mw-239	FWGLL3mw-239C-1651-GF	1/19/2011	Manganese	0.182	mg/L	
LL3mw-239	FWGLL3mw-239C-1725-GF	4/7/2011	Manganese	0.101	mg/L	J
LL3mw-239	LL3MW239-073007	7/30/2007	PCB-1254	0.000532	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	PCB-1254	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	PCB-1254	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	PCB-1254	0.0005	mg/L	U
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	PCB-1254	0.0005	mg/L	UJ
LL3mw-239	LL3MW239-073007	7/30/2007	RDX	0.00105	mg/L	
LL3mw-239	FWGLL3mw-239C-1543-GW	7/8/2010	RDX	0.0017	mg/L	
LL3mw-239	FWGLL3mw-239C-1598-GW	10/12/2010	RDX	0.0016	mg/L	
LL3mw-239	FWGLL3mw-239C-1651-GW	1/19/2011	RDX	0.0016	mg/L	J
LL3mw-239	FWGLL3mw-239C-1725-GW	4/7/2011	RDX	0.0017	mg/L	


Table A10-9
Load Line 3 Groundwater Trend Plots

LL3mw-236

2,4,6-TNT (mg/L)

Date	Result
7/31/2007	0.00105
7/8/2010	0.00031
10/12/2010	0.00017
1/18/2011	0.000084
4/7/2011	0.00018
8/4/2011	0.00037

FWCUG = 0.000521 mg/L

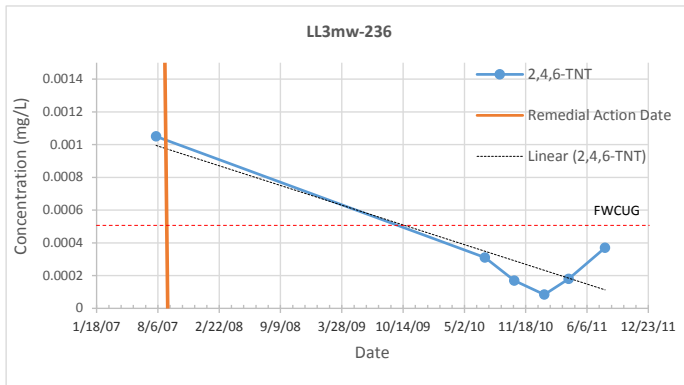

Mann-Kendall Test Using Normal Approximation for Small Sample Size


n	6
S	-3
p	-0.36
α	-0.1
Ho:	No trend
Ha:	Downward trend
$p > \alpha$	Ho rejected at 90% level of confidence; downward trend

LL3mw-236

Manganese (mg/L)

Date	Result
7/31/2007	0.599
10/20/2009	1.06695
7/8/2010	0.235
10/12/2010	0.24
1/18/2011	0.129
4/7/2011	0.344
8/4/2011	0.97

RSL = 0.0043 mg/L

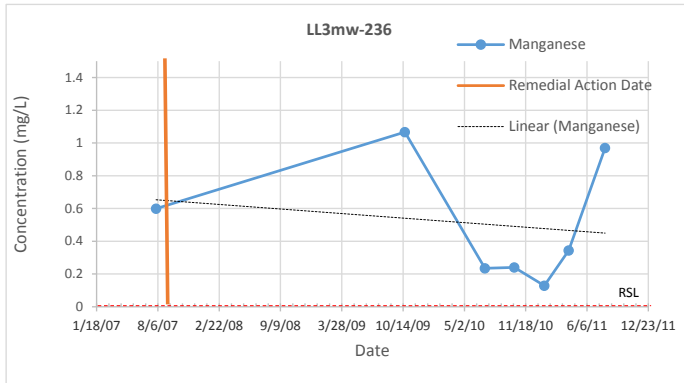

Mann-Kendall Test Using Normal Approximation for Small Sample Size

n	7
S	-1
p	-0.5
α	-0.1
Ho:	No trend
Ha:	Downward trend
$p > \alpha$	Ho rejected at 90% level of confidence; downward trend

LL3mw-238

2,4,6-TNT (mg/L)

Date	Result
7/31/2007	0.0642
10/8/2007	0.096
1/19/2011	0.069
8/3/2011	0.095
8/19/2013	0.079
1/21/2014	0.12
7/23/2014	0.062
3/11/2015	0.045
7/20/2015	0.055

FWCUG = 0.000521 mg/L

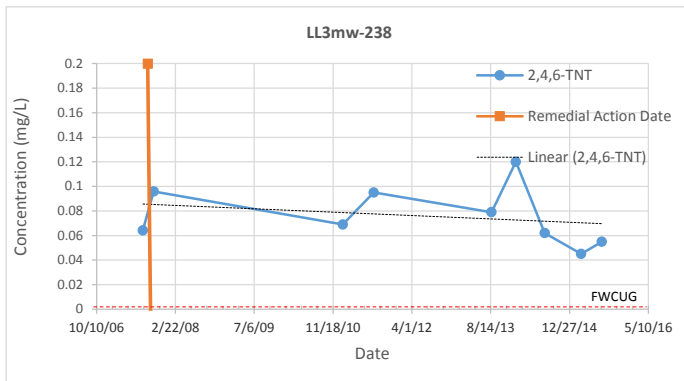


Table A10-9 Load Line 3 Groundwater Trend Plots

Mann-Kendall Test Using Normal Approximation for Small Sample Size


n	9
S	-12
p	-0.13
α	-0.1
Ho:	No trend
Ha:	Downward trend
$p > \alpha$	Ho rejected at 90% level of confidence; downward trend

LL3mw-238

RDX (mg/L)

Date	Result
7/31/2007	0.00842
10/8/2007	0.0066
1/19/2011	0.011
8/3/2011	0.0048
8/19/2013	0.0072
1/21/2014	0.0058
7/23/2014	0.0064
3/11/2015	0.0045
7/20/2015	0.0068

FWCUG = 0.000774 mg/L

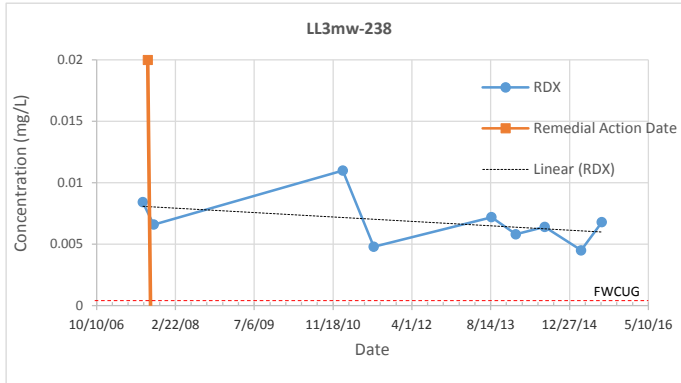

Mann-Kendall Test Using Normal Approximation for Small Sample Size


n	9
S	-8
p	-0.238
α	-0.1
Ho:	No trend
Ha:	Downward trend
$p > \alpha$	Ho rejected at 90% level of confidence; downward trend

LL3mw-238

Barium (mg/L)

Date	Result
7/31/2007	0.01
10/8/2007	0.0067
10/20/2009	0.0262 mean of 2 results
1/19/2011	0.0089
8/3/2011	0.0084
8/19/2013	0.0079
1/21/2014	0.0081
7/23/2014	0.0073
3/11/2015	0.0051
7/20/2015	0.0076

RSL = 0.38 mg/L

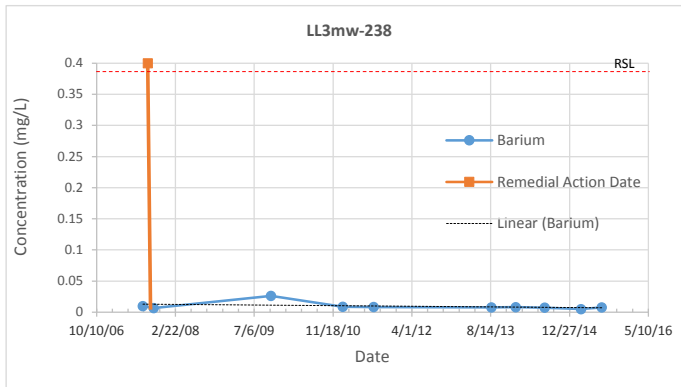


LL3mw-239

2,4,6-TNT (mg/L)

Date	Result
7/30/2007	0.00026
7/8/2010	0.00019
10/12/2010	0.00015
1/19/2011	0.00015
4/7/2011	0.0002

FWCUG = 0.000521 mg/L

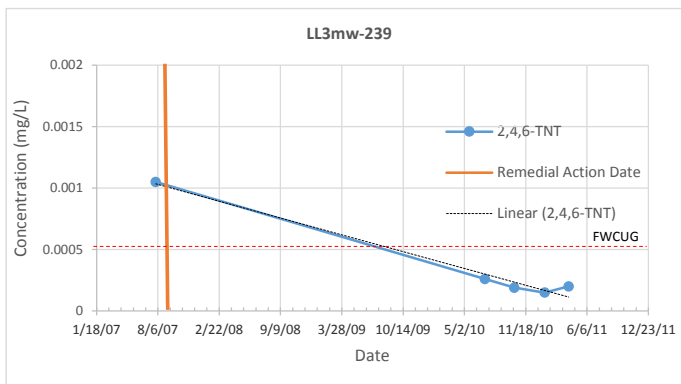

Mann-Kendall Test Using Normal Approximation for Small Sample Size

n	5
S	-6
p	-0.117
α	-0.1
Ho:	No trend
Ha:	Downward trend
$p > \alpha$	Ho rejected at 90% level of confidence; downward trend


Table A10-9
Load Line 3 Groundwater Trend Plots

LL3mw-239

RDX (mg/L)

Date	Result
7/30/2007	0.00105
7/8/2010	0.0017
10/12/2010	0.0016
1/19/2011	0.0016
4/7/2011	0.0017

FWCUG = 0.000774 mg/L

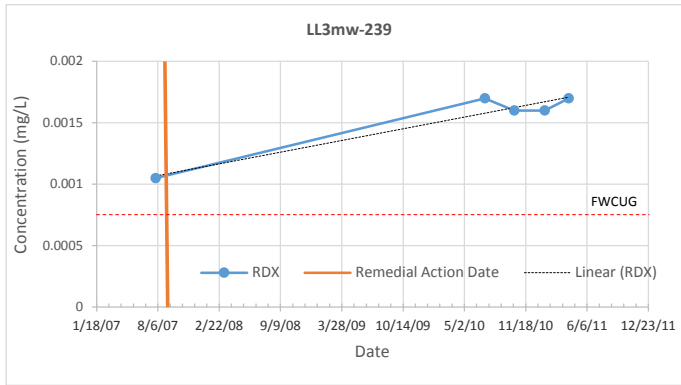

Mann-Kendall Test Using Normal Approximation for Small Sample Size


n 5
S 4
p 0.242
α 0.1
Ho: No trend
Ha: Upward trend
p>α **Ho rejected at 90% level of confidence; upward trend**

LL3mw-239

Barium (mg/L)

Date	Result
7/30/2007	0.0133
10/20/2009	0.01635 mean of 2 results
7/8/2010	0.0104
10/12/2010	0.0147
1/19/2011	0.0192
4/7/2011	0.0111

FWCUG = 0.38 mg/L

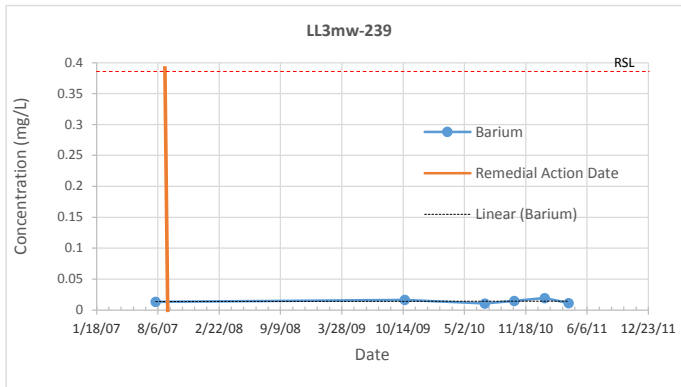


LL3mw-239

Manganese (mg/L)

Date	Result
7/30/2007	0.413
10/20/2009	0.131 mean of 2 results
7/8/2010	0.101
10/12/2010	0.175
1/19/2011	0.182
4/7/2011	0.101

FWCUG = 0.043 mg/L

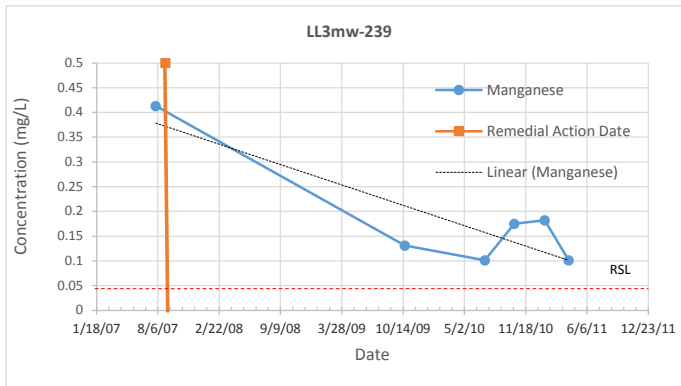

Mann-Kendall Test Using Normal Approximation for Small Sample Size

n 6
S -4
p -0.2934
α -0.1
Ho: Downward trend
Ha: **Ho rejected at 90% level of confidence; downward trend**

Notes:

FWCUG = Facility Wide Cleanup Goal from EQM, 2010, *Final Facility-Wide Human Health Cleanup Goals for the Ravenna Army Ammunition Plant, Ravenna, Ohio*. March 23

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, *Draft Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015*. February 2016

Exceeds FWCUG or RSL

Load Line 4

[This page intentionally left blank]

Table A10-10
Load Line 4 Groundwater Data Summary

Well	Zone Monitored	COC	Discussion
LL4mw-196	Unconsolidated	Aluminum	5 samples collected after the remedial action, all results < RSL, no apparent trend
		Antimony	5 samples collected after the remedial action, all results ND
		Arsenic	5 samples collected after the remedial action, all results < RSL, 3 results ND
		Barium	5 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	5 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	5 samples collected after the remedial action, all results > RSL, no apparent trend
		Lead	5 samples collected after the remedial action, all results ND
		2,4,6-TNT	4 samples collected after the remedial action, all results ND
		RDX	4 samples collected after the remedial action, all results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL4mw-197	Unconsolidated	Aluminum	5 samples collected after the remedial action, 3 results ND & 1 result estimated (< detection limit)
		Antimony	5 samples collected after the remedial action, 4 results ND & 1 result estimated (< detection limit)
		Arsenic	5 samples collected after the remedial action, all results ND
		Barium	5 samples collected after the remedial action, all results < RSL, no apparent trend
		Cadmium	5 samples collected after the remedial action, all results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	5 samples collected after the remedial action, 3 results ND & 1 result estimated (< detection limit)
		Lead	5 samples collected after the remedial action, 4 results ND
		2,4,6-TNT	4 samples collected after the remedial action, 3 results ND & 1 result estimated (< detection limit)
		RDX	4 samples collected after the remedial action, all results ND
		Aroclor-1254	4 samples collected after the remedial action, all results ND
		Benz(a)anthracene	4 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	4 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	4 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	4 samples collected after the remedial action, all results ND
LL4mw-198	Unconsolidated	Aluminum	3 samples collected after the remedial action, 2 results < RSL
		Antimony	3 samples collected after the remedial action, all results ND
		Arsenic	3 samples collected after the remedial action, 2 results ND, all results < RSL
		Barium	3 samples collected after the remedial action, all results < RSL
		Cadmium	3 samples collected after the remedial action, 2 results ND
		Chromium (hexavalent)	No samples collected after the remedial action
		Manganese	3 samples collected after the remedial action, all results > RSL
		Lead	3 samples collected after the remedial action, 2 results ND
		2,4,6-TNT	2 samples collected after the remedial action, all results ND
		RDX	2 samples collected after the remedial action, all results ND
		Aroclor-1254	2 samples collected after the remedial action, all results ND
		Benz(a)anthracene	2 samples collected after the remedial action, all results ND
		Benzo(a)pyrene	2 samples collected after the remedial action, all results ND
		Benzo(b)fluoranthene	2 samples collected after the remedial action, all results ND
		Dibenz(a,h)anthracene	2 samples collected after the remedial action, all results ND

Notes:

ND = not detected

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, Draft Facility-Wide Groundwater Monitoring Program
RVAAP-66 Facility-Wide Groundwater Annual Report for 2015. February 2016

Table A10-11
Load Line 4 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL4mw-196	LL4MW196-073007	7/30/2007	2,4,6-Trinitrotoluene	0.00102	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	2,4,6-Trinitrotoluene	0.000096	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	2,4,6-Trinitrotoluene	0.000096	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	2,4,6-Trinitrotoluene	0.0001	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Aluminum	0.1	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Aluminum	0.05	mg/L	U
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Aluminum	0.715	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Aluminum	0.0228	mg/L	J
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Aluminum	0.0358	mg/L	J
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Aluminum	0.0199	mg/L	J
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Aluminum	0.05	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Antimony	0.001	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Antimony	0.002	mg/L	U
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Antimony	0.002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Antimony	0.002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Antimony	0.002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Antimony	0.002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Antimony	0.002	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Arsenic	0.000709	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Arsenic	0.005	mg/L	U
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Arsenic	0.0066	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Arsenic	0.005	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Arsenic	0.0046	mg/L	J
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Arsenic	0.005	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Arsenic	0.005	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Barium	0.0284	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Barium	0.0358	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Barium	0.0438	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Barium	0.0334	mg/L	
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Barium	0.0497	mg/L	
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Barium	0.0434	mg/L	
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Barium	0.0452	mg/L	
LL4mw-196	LL4MW196-073007	7/30/2007	Benz(a)anthracene	0.0051	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Benzo(a)pyrene	0.0051	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Benzo(b)fluoranthene	0.0051	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Cadmium	0.01	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Cadmium	0.0005	mg/L	U
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Cadmium	0.0005	mg/L	U

Table A10-11
Load Line 4 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Cadmium	0.0005	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Cadmium	0.0005	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Cadmium	0.0005	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Cadmium	0.0005	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Lead	0.001	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Lead	0.003	mg/L	U
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Lead	0.003	mg/L	U
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Lead	0.003	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Lead	0.003	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Lead	0.003	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Lead	0.003	mg/L	U
LL4mw-196	LL4MW196-073007	7/30/2007	Manganese	0.115	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GF	10/16/2009	Manganese	0.149	mg/L	
LL4mw-196	FWGLL4mw-196C-060-GW	10/16/2009	Manganese	0.185	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GF	7/8/2010	Manganese	0.183	mg/L	
LL4mw-196	FWGLL4mw-196C-1599-GF	10/12/2010	Manganese	0.136	mg/L	
LL4mw-196	FWGLL4mw-196C-1653-GF	1/19/2011	Manganese	0.0419	mg/L	
LL4mw-196	FWGLL4mw-196C-1728-GF	4/4/2011	Manganese	0.059	mg/L	
LL4mw-196	LL4MW196-073007	7/30/2007	PCB-1254	0.00051	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	PCB-1254	0.0005	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	PCB-1254	0.0005	mg/L	UJ
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	PCB-1254	0.0005	mg/L	UJ
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	PCB-1254	0.0005	mg/L	UJ
LL4mw-196	LL4MW196-073007	7/30/2007	RDX	0.00102	mg/L	
LL4mw-196	FWGLL4mw-196C-1544-GW	7/8/2010	RDX	0.0001	mg/L	U
LL4mw-196	FWGLL4mw-196C-1599-GW	10/12/2010	RDX	0.000096	mg/L	U
LL4mw-196	FWGLL4mw-196C-1653-GW	1/19/2011	RDX	0.000096	mg/L	U
LL4mw-196	FWGLL4mw-196C-1728-GW	4/4/2011	RDX	0.0001	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	2,4,6-Trinitrotoluene	0.00102	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	2,4,6-Trinitrotoluene	0.000097	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	2,4,6-Trinitrotoluene	0.000096	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	2,4,6-Trinitrotoluene	0.000075	mg/L	J
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	2,4,6-Trinitrotoluene	0.000099	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Aluminum	0.1	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Aluminum	0.05	mg/L	U
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Aluminum	0.872	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Aluminum	0.05	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Aluminum	0.05	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Aluminum	0.0268	mg/L	J
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Aluminum	0.05	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Antimony	0.000333	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Antimony	0.002	mg/L	U
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Antimony	0.002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Antimony	0.00016	mg/L	J
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Antimony	0.002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Antimony	0.002	mg/L	U

Table A10-11
Load Line 4 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Antimony	0.002	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Arsenic	0.000268	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Arsenic	0.005	mg/L	U
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Arsenic	0.005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Arsenic	0.005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Arsenic	0.005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Arsenic	0.005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Arsenic	0.005	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Barium	0.00397	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Barium	0.0085	mg/L	J
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Barium	0.0182	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Barium	0.0151	mg/L	
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Barium	0.0298	mg/L	
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Barium	0.0208	mg/L	
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Barium	0.0131	mg/L	
LL4mw-197	LL4MW197-073007	7/30/2007	Benz(a)anthracene	0.0051	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Benzo(a)pyrene	0.0051	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Benzo(b)fluoranthene	0.0051	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Cadmium	0.01	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Cadmium	0.0005	mg/L	U
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Cadmium	0.0005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Cadmium	0.0005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Cadmium	0.0005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Cadmium	0.0005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Cadmium	0.0005	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Dibenz(a,h)anthracene	0.0051	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Lead	0.000333	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Lead	0.003	mg/L	U
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Lead	0.0019	mg/L	J
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Lead	0.003	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Lead	0.003	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Lead	0.003	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Lead	0.003	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	Manganese	0.01	mg/L	
LL4mw-197	FWGLL4mw-197C-061-GF	10/16/2009	Manganese	0.01	mg/L	U

Table A10-11
Load Line 4 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL4mw-197	FWGLL4mw-197C-061-GW	10/16/2009	Manganese	0.216	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GF	7/8/2010	Manganese	0.01	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GF	10/12/2010	Manganese	0.01	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GF	1/19/2011	Manganese	0.005	mg/L	J
LL4mw-197	FWGLL4mw-197C-1729-GF	4/4/2011	Manganese	0.01	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	PCB-1254	0.00051	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	PCB-1254	0.0005	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	PCB-1254	0.0005	mg/L	UJ
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	PCB-1254	0.0005	mg/L	UJ
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	PCB-1254	0.0005	mg/L	U
LL4mw-197	LL4MW197-073007	7/30/2007	RDX	0.00102	mg/L	
LL4mw-197	FWGLL4mw-197C-1545-GW	7/8/2010	RDX	0.000097	mg/L	U
LL4mw-197	FWGLL4mw-197C-1600-GW	10/12/2010	RDX	0.000096	mg/L	U
LL4mw-197	FWGLL4mw-197C-1654-GW	1/19/2011	RDX	0.000098	mg/L	U
LL4mw-197	FWGLL4mw-197C-1729-GW	4/4/2011	RDX	0.000099	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	2,4,6-Trinitrotoluene	0.00102	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	2,4,6-Trinitrotoluene	0.000099	mg/L	U
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	2,4,6-Trinitrotoluene	0.000098	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Aluminum	0.1	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Aluminum	0.022	mg/L	J
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Aluminum	0.473	mg/L	
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Aluminum	10.3	mg/L	
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Aluminum	0.05	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Antimony	0.001	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Antimony	0.002	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Antimony	0.002	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Antimony	0.00046	mg/L	UJB
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Antimony	0.002	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Arsenic	0.000421	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Arsenic	0.005	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Arsenic	0.0033	mg/L	J
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Arsenic	0.0174	mg/L	
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Arsenic	0.005	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Barium	0.00941	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Barium	0.0153	mg/L	
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Barium	0.0205	mg/L	
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Barium	0.0523	mg/L	
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Barium	0.0087	mg/L	J
LL4mw-198	LL4MW198-073007	7/30/2007	Benz(a)anthracene	0.00556	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	Benz(a)anthracene	0.0002	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Benzo(a)pyrene	0.00556	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	Benzo(a)pyrene	0.0002	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Benzo(b)fluoranthene	0.00556	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	Benzo(b)fluoranthene	0.0002	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Cadmium	0.01	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Cadmium	0.0005	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Cadmium	0.0005	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Cadmium	0.0002	mg/L	J

Table A10-11
Load Line 4 Groundwater Data

Station	Sample ID	Date Collected	Chemical	Results	Units	Data Qual
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Cadmium	0.0005	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Dibenz(a,h)anthracene	0.00556	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	Dibenz(a,h)anthracene	0.0002	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Lead	0.001	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Lead	0.003	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Lead	0.003	mg/L	U
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Lead	0.0115	mg/L	
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Lead	0.003	mg/L	U
LL4mw-198	LL4MW198-073007	7/30/2007	Manganese	1.23	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GF	10/9/2007	Manganese	1.46	mg/L	
LL4mw-198	FWGLL4mw-198C-062-GF	10/21/2009	Manganese	1.42	mg/L	
LL4mw-198	FWGLL4mw-198C-062-GW	10/21/2009	Manganese	1.65	mg/L	
LL4mw-198	FWGLL4mw-198C-1730-GF	4/4/2011	Manganese	1.01	mg/L	
LL4mw-198	LL4MW198-073007	7/30/2007	PCB-1254	0.0005	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	PCB-1254	0.0005	mg/L	UJ
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	PCB-1254	0.0005	mg/L	UJ
LL4mw-198	LL4MW198-073007	7/30/2007	RDX	0.00102	mg/L	
LL4mw-198	FWGLL4mw-198C-0543-GW	10/9/2007	RDX	0.000099	mg/L	U
LL4mw-198	FWGLL4mw-198C-1730-GW	4/4/2011	RDX	0.000098	mg/L	U


Table A10-12
Load Line 4 Groundwater Trend Plots

LL4mw-196
Aluminum

(mg/L)

Date	Result
7/30/2007	0.1
10/16/2009	0.3575 mean of 2 results
7/8/2010	0.0228
10/12/2010	0.0358
1/19/2011	0.0199
4/4/2011	0

RSL = 2 mg/L

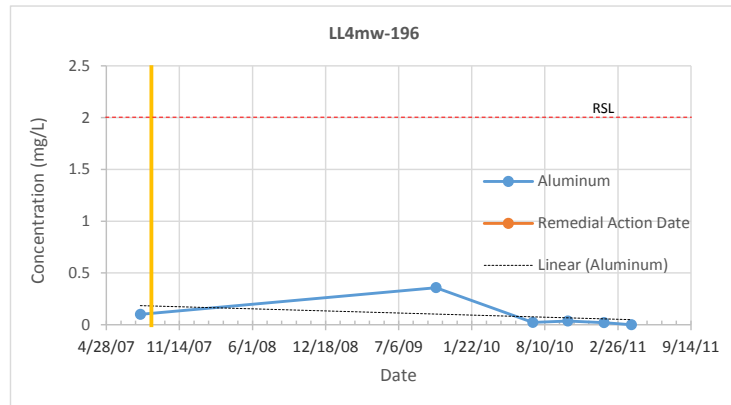


LL4mw-196
Barium

(mg/L)

Date	Result
7/30/2007	0.0284
10/16/2009	0.0398 mean of 2 results
7/8/2010	0.0334
10/12/2010	0.0497
1/19/2011	0.0434
4/4/2011	0.0452

RSL = 0.38 mg/L

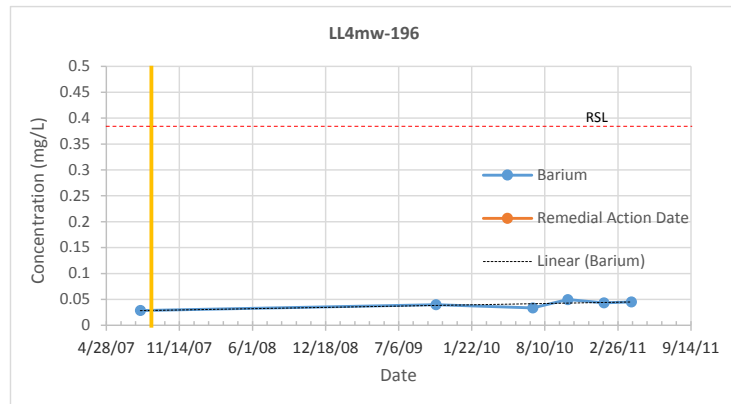


LL4mw-196
Manganese

(mg/L)

Date	Result
7/30/2007	0.115
10/16/2009	0.167 mean of 2 results
7/8/2010	0.183
10/12/2010	0.136
1/19/2011	0.0419
4/4/2011	0.059

RSL = 0.043 mg/L

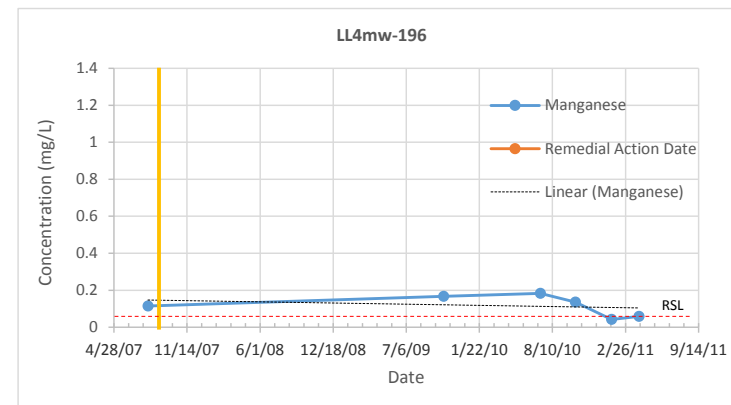

LL4mw-197
Barium

(mg/L)

Date	Result
7/30/2007	0.00397
10/16/2009	0.01335 mean of 2 results
7/8/2010	0.0151
10/12/2010	0.0298
1/19/2011	0.0208
4/4/2011	0.0131

RSL = 0.38 mg/L

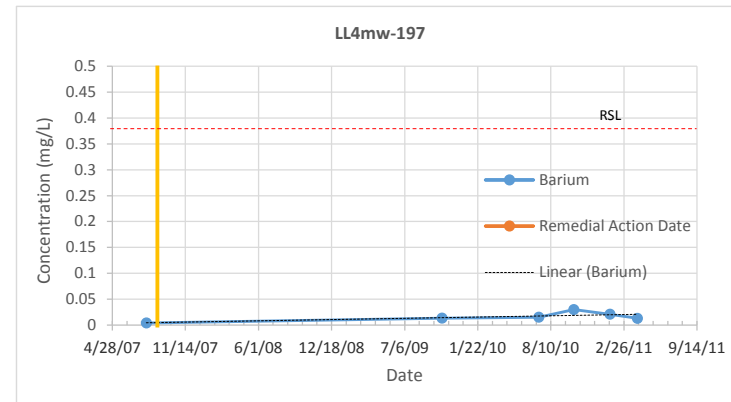



Table A10-12
Load Line 4 Groundwater Trend Plots

LL4mw-198

Aluminum (mg/L)

Date	Result
7/30/2007	0.1
10/9/2007	0.022
10/21/2009	5.387 mean of 2 results
4/4/2011	0

RSL = 2 mg/L

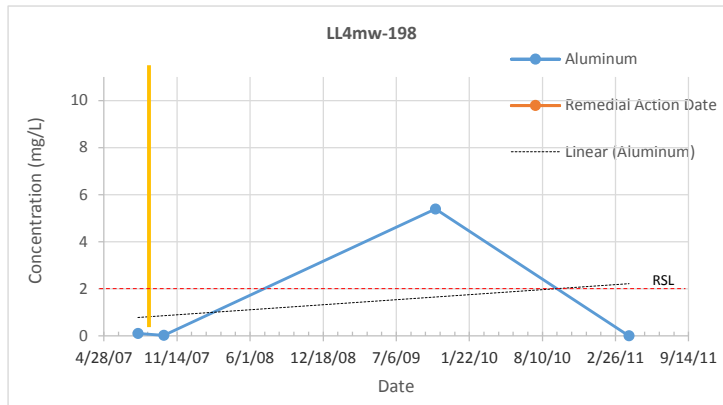


LL4mw-198

Barium (mg/L)

Date	Result
7/30/2007	0.00941
10/9/2007	0.0153
10/21/2009	0.0364 mean of 2 results
4/4/2011	0.0087

RSL = 0.38 mg/L

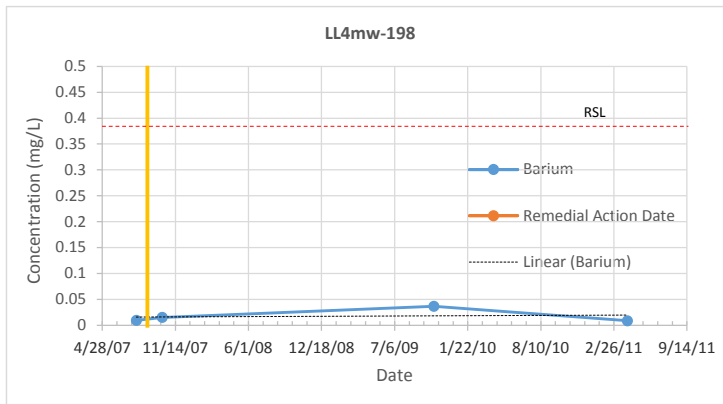


LL4mw-198

Manganese (mg/L)

Date	Result
7/30/2007	
10/9/2007	
10/21/2009	
4/4/2011	

mean of 2 results

RSL = 0.043 mg/L

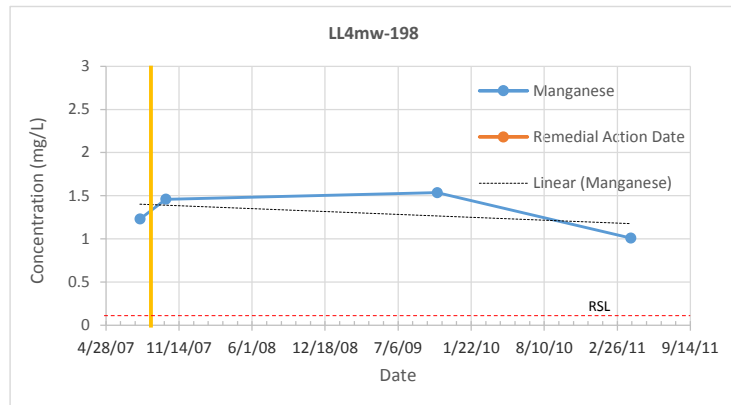

Notes:

RSL = USEPA Regional Screening Level from Table 3-3 Screening Criteria, *Draft Facility-Wide Groundwater Monitoring Program RVAAP-66 Facility-Wide Groundwater Annual Report for 2015*. February 2016

exceeds RSL

ATTACHMENT 11
Soil and Dry Sediment Data

Load Lines 1 – 4

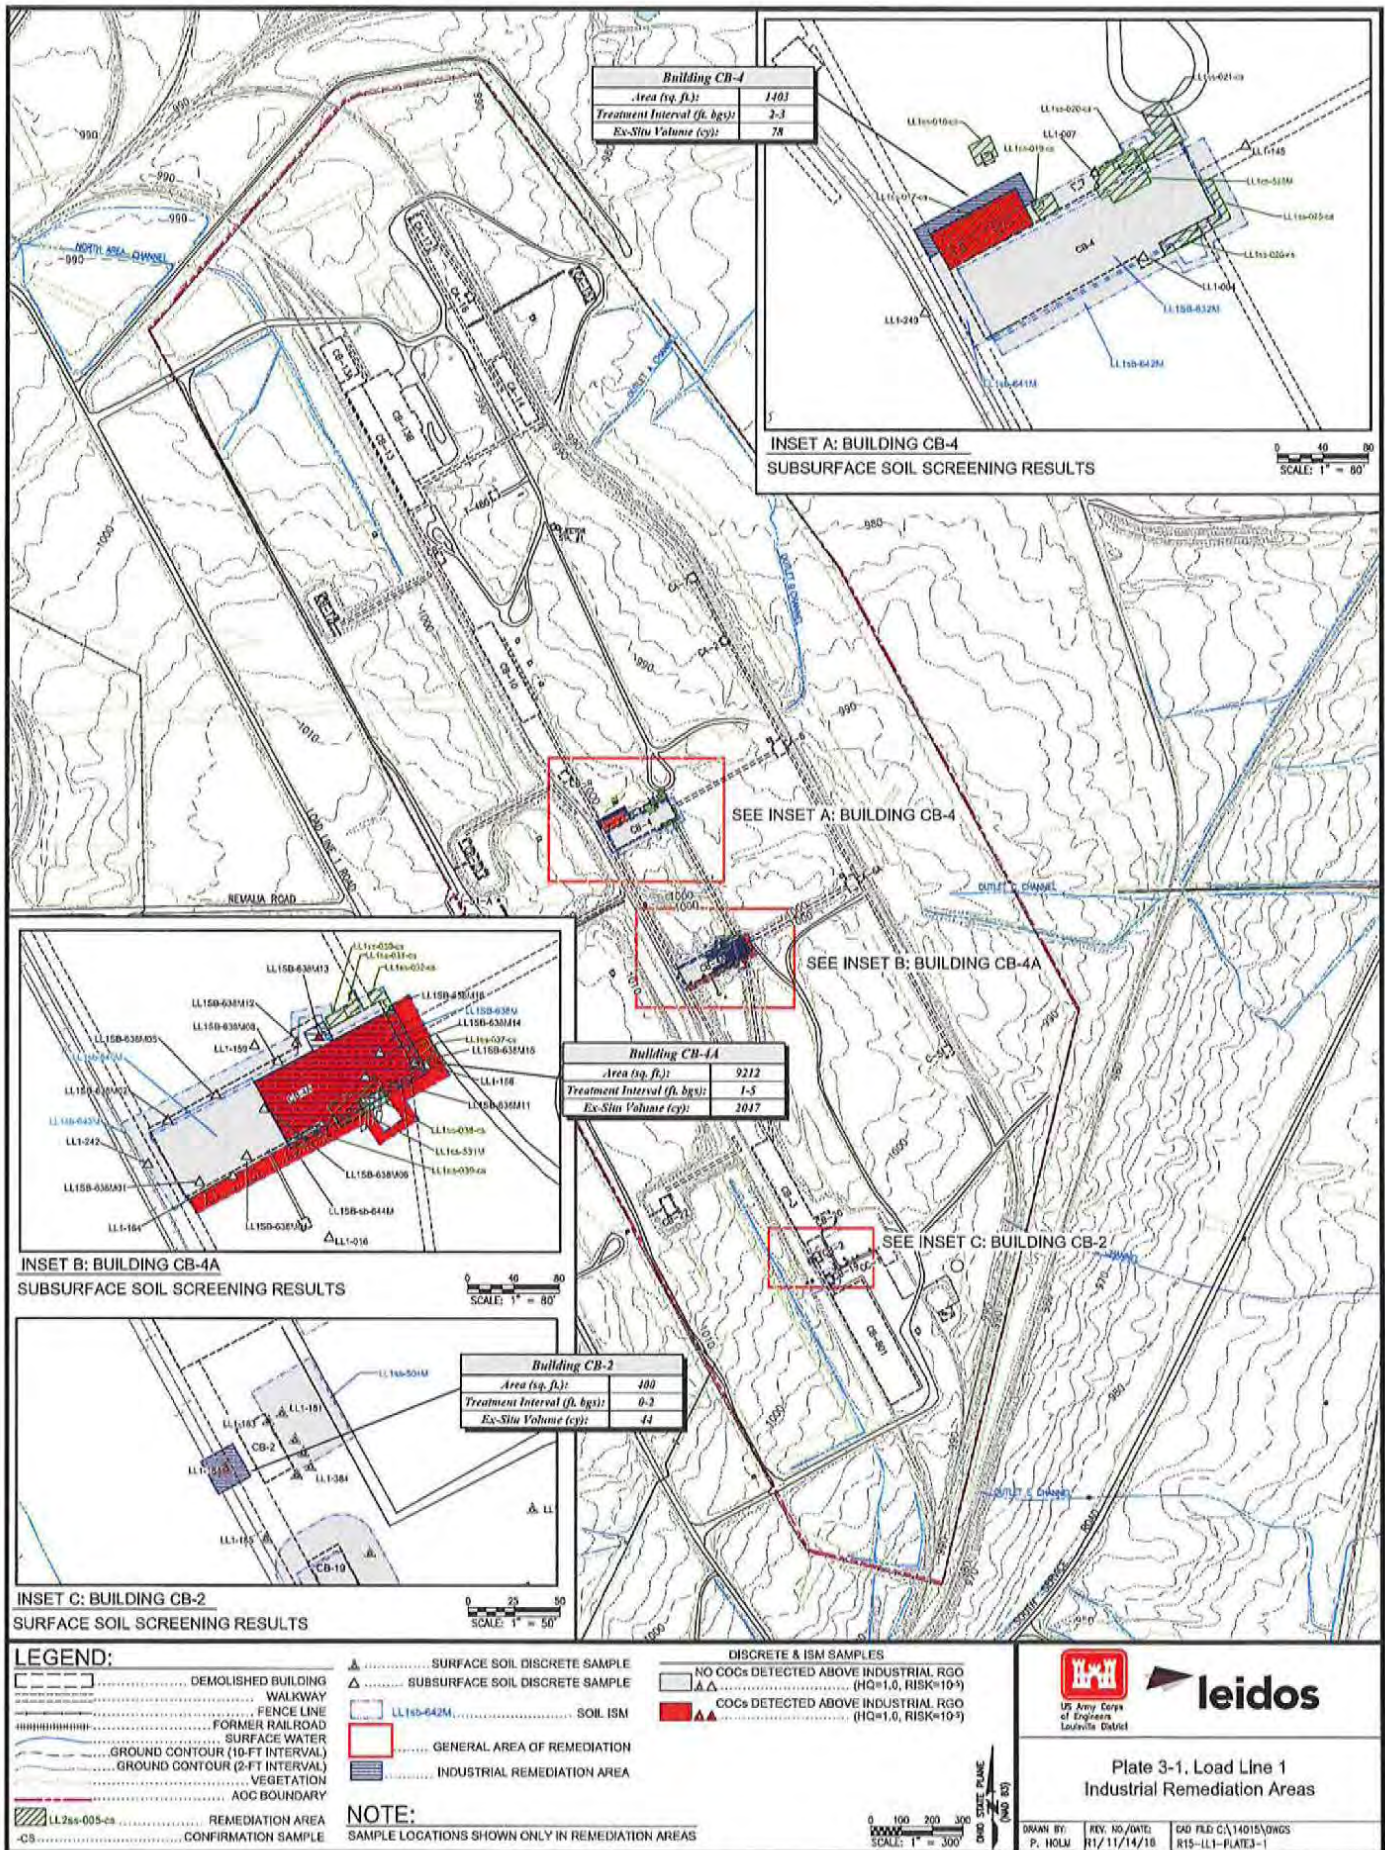


Table 2-4. Summary of Human Health COC Concentrations and Conclusions for Unrestricted (Residential) Land Use at Load Line 1

Station	Sample Type	Residential RGO		COC											Conclusion for Unrestricted Land Use
				Metal		Explosive		PAH					Pesticide	PCB	
		Date	Depth (ft)	31	400	36	61	1.6	0.16	1.6	0.16	1.6	0.34	1.2	
				Antimony	Lead	TNT	RDX	B(a)A	B(a)P	B(b)F	DA	IP	Dieldrin	PCB-1254	
<i>Building CB-4</i>															
LL1-005	D	09/13/00	0.0 - 1.0	--	1,110	--	--	--	--	--	--	--	--	--	NFA
LL1-341	D	10/02/00	0.0 - 1.0	--	--	83	--	--	--	--	--	--	--	--	Remediate
LL1-342	D	09/29/00	0.0 - 1.0	--	--	39	--	--	--	--	--	--	--	--	NFA
LL1-343	D	09/29/00	0.0 - 1.0	--	--	150	--	--	--	--	--	--	--	--	Remediate
LL1ss-609	ISM	12/01/09	0.0 - 0.5	--	--	--	--	--	0.24 ^b	0.38 ^{a,b}	--	--	--	4.9	Remediate
LL1sb-641M	ISM	07/06/11	1.0 - 3.0	--	--	--	--	0.23 ^a	0.19	0.22 ^a	0.03 ^a	--	--	--	NFA
LL1sb-642M	ISM	07/06/11	1.0 - 3.0	--	--	--	--	0.21 ^a	0.19	0.25 ^a	--	0.12 ^a	--	--	NFA
LL1ss-017-cs	ISM	10/29/07	2.0 - 3.0	--	--	--	--	--	--	--	--	--	--	10.9	Remediate
<i>Building CA-6</i>															
LL1-136	D	09/15/00	0.0 - 1.0	--	--	180	--	--	--	--	--	--	--	--	Remediate
LL1SB-635M03	D	08/31/10	1.0 - 5.0	--	--	--	--	3.2	2	2.7	--	--	--	--	Remediate
LL1SB-635M04	D	08/31/10	1.0 - 5.0	--	--	--	--	5.5	3.5	5.5	--	--	--	--	Remediate
LL1SB-635M	ISM	08/31/10	1.0 - 3.0	--	--	--	--	1.8	1	1.5 ^a	--	--	--	--	Remediate
LL1SB-635M	ISM	08/31/10	5.0 - 7.0	--	--	--	--	1.8	1.2	1.8	--	--	--	--	Remediate
<i>Outlet B Channel</i>															
LL1ss-024-cs	ISM	09/12/07	2.5 - 3.5	--	--	290	--	--	--	--	--	--	--	--	Remediate
<i>Building CB-4A</i>															
LL1-156	D	09/13/00	0.0 - 1.0	--	--	--	67	--	--	--	--	--	--	--	Remediate
LL1-159	D	09/14/00	0.0 - 1.0	--	--	64	--	--	--	--	--	--	--	--	Remediate
LL1-160	D	09/14/00	0.0 - 1.0	--	454 ^b	250	--	--	--	--	--	--	--	--	Remediate
LL1-161	D	09/14/00	0.0 - 1.0	--	411 ^b	200	--	--	--	--	--	--	--	--	Remediate
LL1-162	D	09/14/00	0.0 - 1.0	--	1,430	--	--	--	--	--	--	--	--	--	NFA
LL1-168	D	09/13/00	0.0 - 1.0	--	--	--	--	1.2 ^a	0.93	1.2 ^a	0.096 ^a	--	--	--	Remediate
LL1-356	D	09/30/00	0.0 - 1.0	--	636	--	--	--	--	--	--	--	--	--	NFA
LL1-407	D	10/01/00	0.0 - 1.0	--	--	180	--	--	--	--	--	--	--	--	Remediate
LL1SB-638M13	D	09/01/10	1.0 - 5.0	--	--	--	1,500	--	--	--	--	--	--	--	Remediate
LL1SB-638M14	D	09/01/10	1.0 - 5.0	--	--	100	--	--	--	--	--	--	--	--	Remediate
LL1ss-523M	ISM	10/26/09	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	1.22	NFA
LL1ss-524M	ISM	10/26/09	0.0 - 1.0	--	--	158	60.3 ^a	--	--	--	--	--	--	0.915 ^a	Remediate
LL1ss-525M	ISM	10/26/09	0.0 - 1.0	--	--	--	--	1.87	1.4	1.15 ^a	--	--	--	--	Remediate
LL1ss-619	ISM	12/01/09	0.0 - 0.5	--	--	--	--	--	0.087 ^a	0.15 ^a	--	--	0.09 ^{ab}	2.2	Remediate
LL1SB-638M	ISM	09/01/10	1.0 - 3.0	--	--	150	490	--	--	--	--	--	--	--	Remediate

Table 2-4. Summary of Human Health COC Concentrations and Conclusions for Unrestricted (Residential) Land Use at Load Line 1 (continued)

Station	Sample Type	Residential RGO		COC											Conclusion for Unrestricted Land Use
				Metals		Explosives		PAHs					Pesticide	PCB	
		Date	Depth (ft)	31	400	36	61	1.6	0.16	1.6	0.16	1.6	0.34	1.2	
				Antimony	Lead	TNT	RDX	B(a)A	B(a)P	B(b)F	DA	IP	Dieldrin	PCB-1254	
LL1SB-638M	ISM	09/01/10	3.0 - 5.0	--	--	2,700	--	--	--	--	--	--	--	--	Remediate
LL1sb-644M	ISM	07/05/11	3.0 - 5.0	--	--	--	--	--	0.1 ^a	--	--	--	--	14	Remediate
LL1sb-644M	ISM	07/05/11	5.0 - 7.0	--	--	--	--	--	--	--	--	--	--	1.8	Remediate
<i>Building CA-6A</i>															
LL1-333	D	09/16/00	0.0 - 1.0	--	674	--	--	--	--	--	--	--	--	--	NFA
LL1SB-633M	ISM	08/25/10	3.0 - 5.0	--	--	47	--	--	--	--	--	--	--	--	Remediate
LL1ss-033-cs	ISM	09/11/07	2.3 - 3.3	--	--	160	--	--	--	--	--	--	--	--	Remediate
<i>Building CB-3</i>															
LL1-184	D	09/18/00	0.0 - 1.0	648	1,620	--	--	--	--	--	--	--	--	--	Remediate
LL1-185	D	09/18/00	0.0 - 1.0	429	736	--	--	0.22 ^{a,b}	0.21 ^b	0.41 ^{a,b}	--	--	--	1.7	Remediate
LL1-386	D	09/28/00	0.0 - 1.0	--	550	--	--	--	--	--	--	--	--	--	NFA
LL1-387	D	09/29/00	0.0 - 1.0	--	639	--	--	--	--	--	--	--	--	--	NFA
LL1-410	D	09/29/00	0.0 - 1.0	--	510	--	--	--	--	--	--	--	--	--	NFA
FWCss-001	ISM	12/01/09	0.0 - 0.5	--	--	--	--	0.9 ^a	0.84	1.5 ^a	--	--	--	--	Remediate
LL1ss-040-cs	ISM	09/12/07	2.0 - 3.0	--	--	--	--	--	0.49	--	--	--	--	--	NFA
<i>Isolated Discrete Soil Locations</i>															
CB12-02	D	11/04/99	0.0 - 1.0	--	532	--	--	--	--	--	--	--	--	--	NFA
CB23-01	D	11/04/99	0.0 - 1.0	--	426	--	--	--	--	--	--	--	--	--	NFA
LL1-049	D	09/16/00	0.0 - 0.5	1,180	1,210	--	--	--	--	--	--	--	--	--	Remediate
LL1-087	D	09/25/00	0.0 - 1.0	--	602	--	--	--	--	--	--	--	--	--	NFA
LL1-091	D	09/25/00	0.0 - 1.0	--	--	--	--	--	0.84	1.1 ^a	0.18	--	--	4.7	NFA
LL1-103	D	09/19/00	0.0 - 1.0	--	--	--	--	0.64 ^a	0.53	0.75 ^a	0.086 ^a	--	--	0.74 ^a	NFA
LL1-130	D	09/27/00	0.0 - 1.0	--	--	--	--	0.41 ^a	0.37	0.47 ^a	--	--	--	2.4	NFA
LL1-252	D	09/17/00	0.0 - 0.5	--	1,140	--	--	--	--	--	--	--	--	--	NFA
LL1-369	D	09/28/00	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	1.7	NFA
LL1-087	D	09/28/00	1.0 - 2.5	--	558	--	--	--	--	--	--	--	--	--	NFA

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

^bSample location is recommended for remediation for other chemicals of interest; however, this chemical is not recommended as a COC for remediation.

All units are mg/kg.

B(a)A = Benz(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

DA = Dibenz(a,h)anthracene.

ft = Feet.

-- = Chemical is not a human health COC in this sample.

ISM = Incremental Sampling Methodology.

IP = Indeno(1,2,3-cd)pyrene.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RDX = Hexahydro-1,3,5-Trinitro-1,3,5-Triazine.

RGO = Remedial Goal Option.

TNT = Trinitrotoluene.

Table 2-5. Summary of Human Health COC Concentrations and Conclusions for Commercial/Industrial Land Use at Load Line 1

Station	Sample Type	Industrial RGO		COC								Conclusion for Commercial/Industrial Land Use
				Metal		Explosive		PAH			PCB	
		Date	Depth (ft)	470	800	510	280	29	2.9	29	9.7	
				Antimony	Lead	TNT	RDX	B(a)A	B(a)P	B(b)F	PCB-1254	
<i>Building CB-4</i>												
LL1-005	D	09/13/00	0.0 - 1.0	--	1,110	--	--	--	--	--	--	NFA
LL1ss-017-cs	ISM	10/29/07	2.0 - 3.0	--	--	--	--	--	--	--	10.9	Remediate
<i>Building CB-4A</i>												
LL1-162	D	09/14/00	0.0 - 1.0	--	1,430	--	--	--	--	--	--	NFA
LL1SB-638M13	D	09/01/10	1.0 - 5.0	--	--	--	1,500	--	--	--	--	Remediate
LL1SB-638M	ISM	09/01/10	1.0 - 3.0	--	--	150 ^a	490	--	--	--	--	Remediate
LL1SB-638M	ISM	09/01/10	3.0 - 5.0	--	--	2,700	--	--	--	--	--	Remediate
LL1sb-644M	ISM	07/05/11	3.0 - 5.0	--	--	--	--	--	0.1 ^a	--	14	NFA
<i>Building CA-6</i>												
LL1SB-635M04	D	08/31/10	1.0 - 5.0	--	--	--	--	5.5 ^a	3.5	5.5 ^a	--	NFA
<i>Building CB-3</i>												
LL1-184	D	09/18/00	0.0 - 1.0	648	1,620	--	--	--	--	--	--	Remediate
<i>Isolated Discrete Soil Location</i>												
LL1-049	D	09/16/00	0.0 - 0.5	1,180	1,210	--	--	--	--	--	--	NFA
LL1-252	D	09/17/00	0.0 - 0.5	--	1,140	--	--	--	--	--	--	NFA

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

All units are mg/kg.

B(a)A = Benz(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

ft = Feet.

ISM = Incremental Sampling Methodology.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RDX = Hexahydro-1,3,5-Trinitro-1,3,5-Triazine.

RGO = Remedial Goal Option.

TNT = Trinitrotoluene.

-- = Chemical is not a human health COC in this sample.

Table 2-9. Summary of Human Health COC Concentrations in Soil and Sediment and Conclusions for Unrestricted (Residential) Land Use

Station	Sample Type	Residential RGO ^b		Metal			Explosive		PAH					PCB		Conclusion for Unrestricted Land Use
		Date	Depth (ft)	31 Antimony	400 Lead	0.78 Thallium	36 TNT	17 2,4-DNT	1.6 B(a)A	0.16 B(a)P	1.6 B(b)F	0.16 DA	1.6 IP	1.2 PCB-1254	2.4 PCB-1260	
Building DB-10																
LL2ss-315M	ISM	06/22/10	1.3 - 2.3	—	—	—	46.4	—	1.01 ^a	1.13	0.957 ^a	—	—	—	—	Remediate
LL2ss-298M	ISM	06/24/08	0.0 - 1.0	—	—	—	—	—	0.445 ^a	0.406	0.339 ^a	—	—	2.24	0.785 ^a	Remediate
LL2-120	D	07/25/01	0.0 - 1.0	—	820	—	—	—	—	—	—	—	—	—	—	NFA
Building DB-4																
LL2ss-285M	ISM	06/20/08	0.0 - 1.0	—	—	—	125	—	0.427 ^a	0.379	0.301 ^a	—	—	0.437 ^a	—	Remediate
LL2ss-407	ISM	12/02/09	0.0 - 0.5	—	—	—	—	—	3.9	3.8	5.1	—	2	1.3	—	Remediate
LL2-130	D	07/27/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	2.5	—	All of these discrete samples are within LL2ss-407, which is recommended for remediation; therefore, alone, these results might not drive remediation, but they will be taken care of as part of the 407 excavation
LL2-130	D	07/28/01	1.0 - 3.0	—	747	—	46	—	—	—	—	—	—	—	—	
LL2-133	D	07/28/01	0.0 - 1.0	—	—	—	—	—	0.39 ^a	0.5	0.66 ^a	—	—	0.77 ^a	—	
LL2-133	D	07/29/01	1.0 - 3.0	—	—	—	53	—	—	—	—	—	—	—	—	
LL2-131	D	07/26/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	5	—	
LL2-134	D	07/28/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	4.4	—	
LL2ss-519M	ISM	07/02/11	0.0 - 1.0	—	—	—	—	—	0.52 ^a	0.59	0.63 ^a	0.097 ^a	0.4 ^a	—	—	NFA
LL2-127	D	07/26/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	1.2 ^a	—	NFA
LL2sb-513M	ISM	07/01/11	1.0 - 3.0	—	—	—	—	—	1 ^a	0.88	1.1 ^a	0.16 ^a	—	—	—	NFA
Building DA-6																
LL2-082	D	07/25/01	0.0 - 1.0	—	—	—	1100	—	—	—	—	—	—	—	—	NFA
LL2SB-508M	ISM	08/25/10	1.0 - 3.0	—	—	—	230	—	—	—	—	—	—	—	—	Remediate
LL2ss-055-cs	ISM	10/08/07	2.0 - 3.0	—	—	—	77.6	—	—	—	—	—	—	—	—	Remediate
Building DB-1A																
LL2-158	D	07/27/01	0.0 - 1.0	—	—	—	610	—	—	—	—	—	—	—	—	Remediate
LL2ss-288M	ISM	06/18/08	0.0 - 1.0	—	—	—	66.6	—	—	—	—	—	—	—	—	NFA
LL2ss-287M	ISM	06/24/08	0.0 - 1.0	—	—	—	—	—	—	0.167	—	—	—	—	—	NFA
LL2-146	D	07/27/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	—	2.8	NFA
LL2-148	D	07/27/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	1.8	—	NFA
Building DA-6A																
LL2-087	D	07/26/01	0.0 - 1.0	—	—	—	240	3.3 ^a	—	—	—	—	—	2.6	—	Remediate
LL2-087	D	07/30/01	3.0 - 5.0	—	—	—	240	—	—	—	—	—	—	—	—	Remediate
LL2SB-506M	ISM	08/24/10	3.0 - 5.0	—	—	—	130	—	—	—	—	—	—	—	—	Remediate
LL2ss-406	ISM	12/01/09	0.0 - 0.5	—	—	—	38	—	—	—	—	—	—	—	—	Remediate
LL2-093	D	07/26/01	0.0 - 1.0	—	—	—	—	—	0.17 ^a	0.21	0.22 ^a	—	—	—	—	NFA
Building DB-3																
LL2-165	D	07/28/01	0.0 - 1.0	—	—	—	—	—	—	1.9	2.4	0.22	—	9.4	—	Remediate
LL2ss-516M	ISM	07/03/11	0.0 - 1.0	—	—	—	—	—	1.5 ^a	1.6	1.9	0.24	—	—	—	Remediate
LL2ss-280M	ISM	06/18/08	0.0 - 1.0	—	—	—	—	—	0.392 ^a	0.402	0.285 ^a	—	—	—	—	NFA
LL2ss-279M	ISM	06/18/08	0.0 - 1.0	—	—	—	—	—	0.371 ^a	0.316	0.24 ^a	—	—	—	—	NFA
Building DC-1																
LL2-170	D	07/24/01	0.0 - 1.0	—	—	—	—	—	1.1 ^a	1.5	1.3 ^a	—	—	—	—	NFA
LL2-171	D	07/24/01	0.0 - 1.0	—	—	—	—	—	0.44 ^a	0.56	0.61 ^a	0.11 ^a	—	—	—	NFA
LL2-169	D	07/24/01	0.0 - 1.0	—	—	—	—	—	1.7	1.8	2	0.28	—	—	—	Remediate
FWCsg-002	ISM	12/03/09	0.0 - 0.5	—	—	—	—	—	1.5 ^a	1.4	2.5	—	—	—	—	Remediate
LL2-172	D	07/24/01	0.0 - 1.0	—	—	—	—	—	0.22 ^a	0.3	0.35 ^a	—	0.19 ^a	—	—	NFA
Building DB-13																
LL2-100	D	07/26/01	0.0 - 1.0	59.5	1220	0.99	—	—	—	—	—	—	—	3	—	NFA
LL2-100	D	07/29/01	1.0 - 3.0	—	1530	—	—	—	—	—	—	—	—	—	—	NFA
LL2-108	D	07/27/01	0.0 - 1.0	—	—	—	—	—	0.16 ^a	0.19	0.28 ^a	—	0.13 ^a	—	—	NFA
Isolated Discrete Samples																
LL2-252	D	07/30/01	0.0 - 0.5	69.2	656	—	—	—	—	—	—	—	—	—	—	Remediate

Table 2-9. Summary of Human Health COC Concentrations in Soil and Sediment and Conclusions for Unrestricted (Residential) Land Use (continued)

Station	Sample Type	Residential RGO		Metals			Explosives		PAHs				PCBs		Conclusion for Unrestricted Land Use	
				31	400	0.78	36	17	1,6	0,16	1,6	0,16	1,6	1,2		2,4
		Date	Depth (ft)	Antimony	Lead	Thallium	TNT	2,4-DNT	BaA	BaP	BbF	DA	IP	PCB-1254		PCB-1260
Kelly's Pond and Exit Drainage																
LL2sd-053	D	07/30/01	0 - 0.5	—	—	—	—	—	0.15 ^a	0.18	0.25 ^a	—	0.11 ^a	—	—	Remediate
LL2sd-182	D	07/31/01	0 - 0.5	—	—	—	—	—	0.6 ^a	0.55	0.71 ^a	0.082 ^a	—	—	—	NFA
Kelly's Pond	ISM	06/23/03	0 - 0.3	—	—	—	—	—	1.25 ^a	1.4	2.3	0.135 ^a	1.045 ^a	—	—	Remediate
LL2SD-630	D	05/16/16	0 - 1	—	—	—	—	—	0.228 ^a	0.216	0.311 ^a	0.0296 ^a	—	—	—	NFA
LL2SD-632	D	05/16/16	0 - 1	—	—	—	—	—	0.471 ^a	0.463	0.675 ^a	0.0797 ^a	—	—	—	Remediate
LL2SD-633	D	05/16/16	0 - 1	—	—	—	—	—	0.806 ^a	0.941	1.39 ^a	0.154 ^a	0.646 ^a	—	—	Remediate
LL2SD-631	D	05/17/16	0 - 1	—	—	—	—	—	16.4	23.6	41.2	4.55	19.1	—	—	Remediate

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

^bResidential RGOs are the same for soil and sediment. This results in a very conservative assessment of sediment.

All units are mg/kg.

B(a)A = Benzo(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

DA = Dibenzo(a,h)anthracene.

DNT = Dinitrotoluene.

ft = Feet.

IP = Indeno(1,2,3-cd)pyrene.

ISM = Incremental Sampling Methodology.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RGO = Remedial Goal Option.

TNT = Trinitrotoluene.

— = Chemical is not a COC in this sample.

Table 2-10. Summary of Human Health COC Concentrations in Soil and Conclusions for Industrial/Commercial Land Use

Station	Sample Type	Residential RGO		Metal		Explosive	PAH			Pesticide	PCB	Conclusion for Commercial/Industrial Land Use
		Date	Depth (ft)	470	800	510	29	2.9	29	1.4	9.7	
				Antimony	Lead	TNT	B(a)A	B(a)P	B(b)F	Dieldrin	PCB-1254	
<i>Building DB-10</i>												
LL2-120	D	07/25/01	0.0 - 1.0	--	820	--	--	--	--	--	--	NFA
<i>Building DB-4</i>												
LL2ss-407	ISM	12/02/09	0.0 - 0.5	--	--	--	3.9 ^a	3.8	5.1 ^a	--	1.3 ^a	NFA
<i>Building DA-6</i>												
LL2-082	D	07/25/01	0.0 - 1.0	--	--	1100	--	--	--	--	--	NFA
<i>Building DB-4A</i>												
LL2-158	D	07/27/01	0.0 - 1.0	--	--	610	--	--	--	--	--	Remediate
<i>Building DB-3</i>												
LL2-165	D	07/28/01	0.0 - 1.0	--	--	--	--	1.9 ^a	--	0.29 ^a	9.4 ^a	NFA
<i>Building DB-13</i>												
LL2-100	D	07/26/01	0.0 - 1.0	--	1220	--	--	--	--	--	--	NFA
LL2-100	D	07/29/01	1.0 - 3.0	--	1530	--	--	--	--	--	--	NFA

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

All units are mg/kg.

B(a)A = Benzo(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

ft = Foot.

ISM = Incremental Sampling Methodology.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RGO = Remedial Goal Option.

TNT = Trinitrotoluene.

-- = Chemical is not a human health COC in this sample.

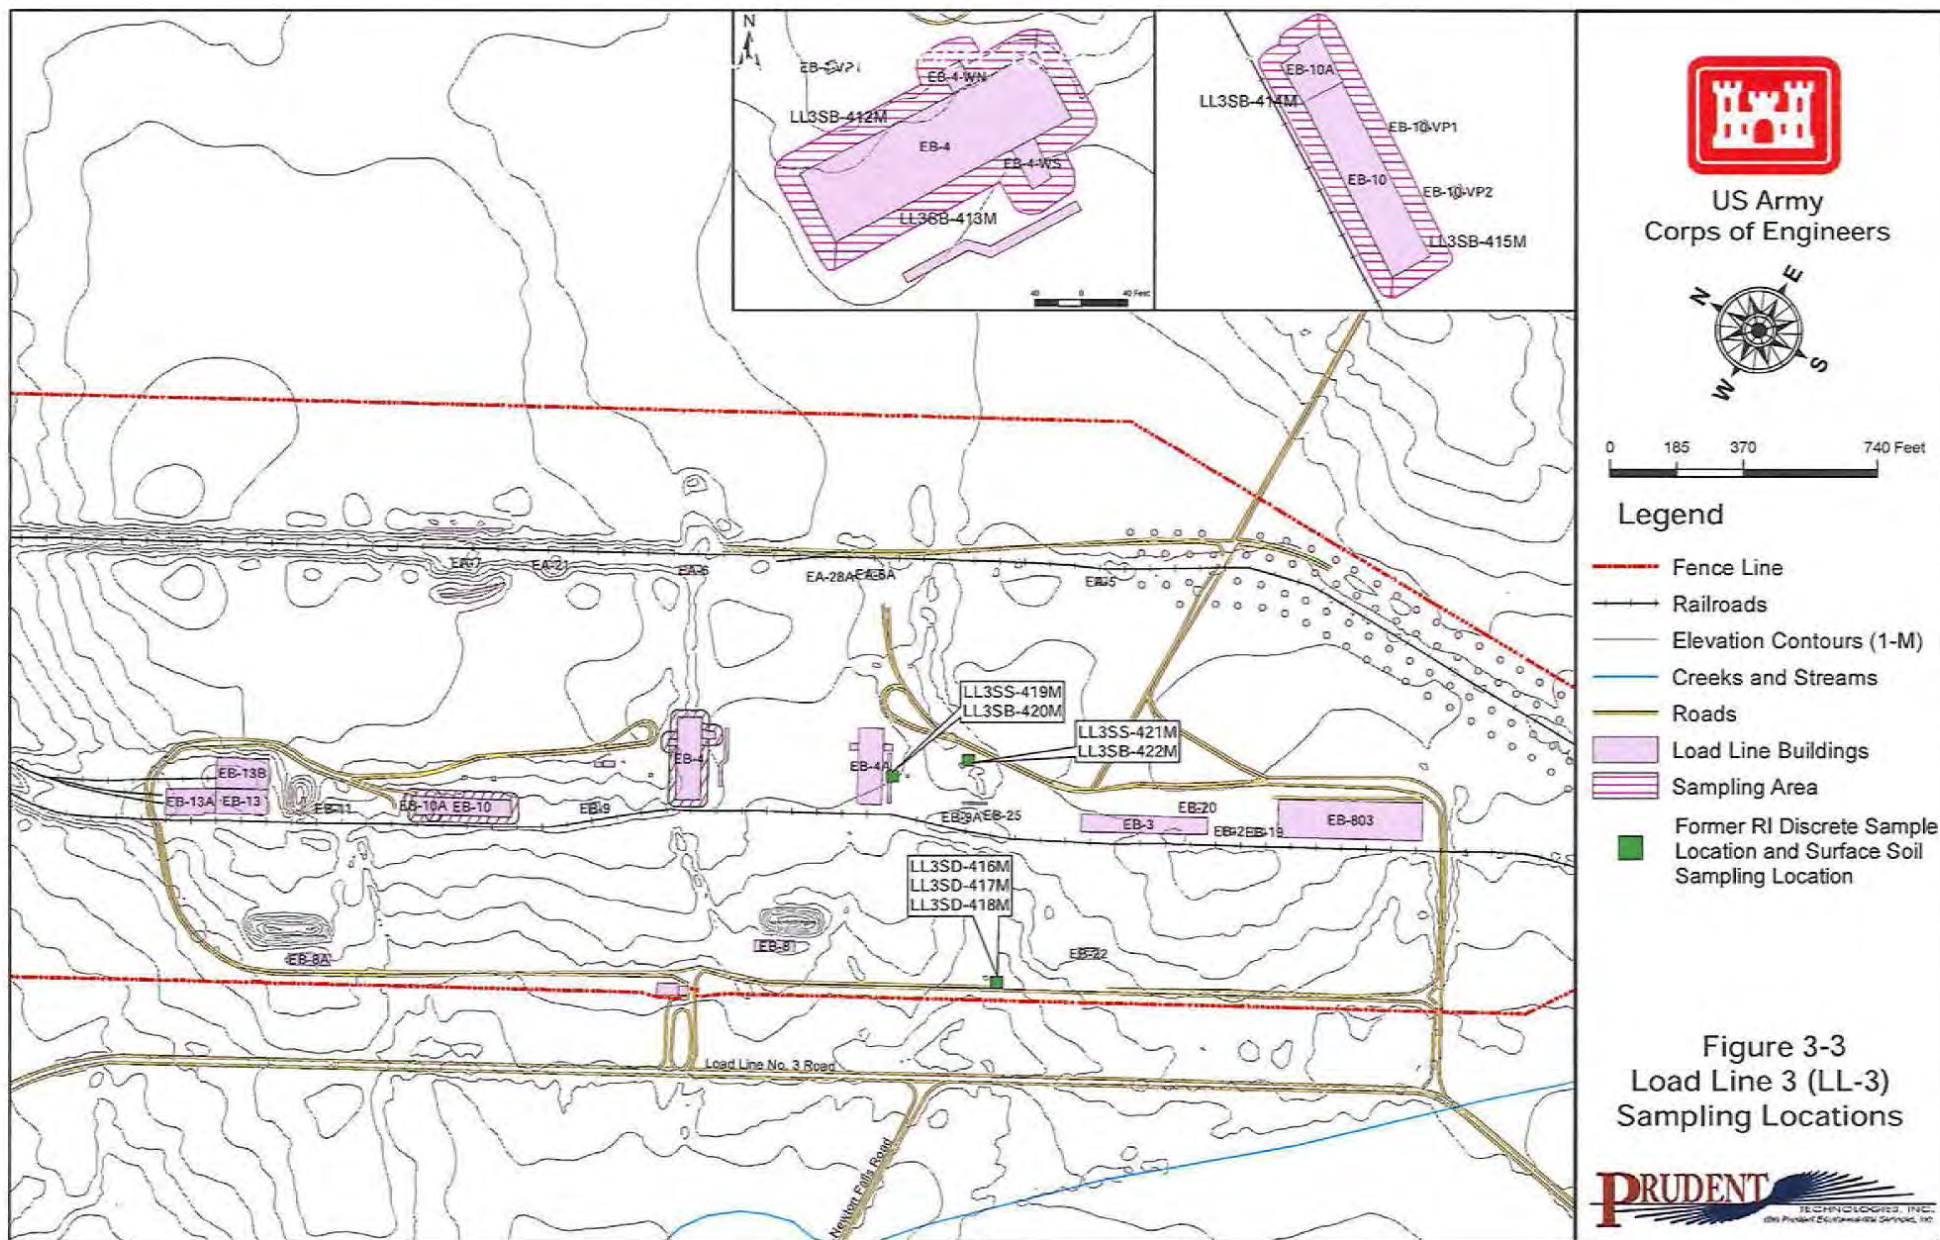


Table 2-14. Summary of Human Health COC Concentrations and Conclusions for Unrestricted (Residential) Land Use at Load Line 3

Station	Sample Type	Residential RGO		COC												Conclusion for Unrestricted Land Use	
				Metal		Explosive		PAH				Pesticide		PCB			
		Date	Depth (ft)	6.8	400	36	61	1.6	0.16	1.6	0.16	1.6	0.34	1.3	1.2		2.4
				Arsenic	Lead	TNT	RDX	B(a)A	B(a)P	B(b)F	DA	IP	Dieldrin	Heptachlor	PCB-1254	PCB-1260	
Building EB-10																	
LL3-083	D	08/06/01	0.0 - 1.0	--	--	--	--	0.26 ^a	0.26	0.33 ^a	--	--	--	--	--	--	Remediate
LL3-085	D	08/06/01	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	--	3.9	--	NFA
LL3-088	D	08/06/01	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	--	1.8	--	NFA
LL3-092	D	08/07/01	0.0 - 1.0	--	599	--	--	--	--	--	--	--	--	--	20	--	NFA
LL3SB-409M	ISM	08/30/10	1.0 - 3.0	--	--	--	--	--	0.17	--	--	--	--	--	--	--	NFA
LL3SB-409M02	D	08/30/10	1.0 - 7.0	--	--	--	--	0.43 ^a	0.41	0.5 ^a	0.059 ^a	--	--	--	--	--	Remediate
LL3SB-409M06	D	08/30/10	1.0 - 7.0	--	--	--	--	0.25 ^a	0.27	0.3	0.039 ^a	--	--	--	--	--	Remediate
LL3SB-409M08	D	08/30/10	1.0 - 7.0	--	--	--	--	0.17 ^a	0.17	0.24 ^a	--	--	--	--	--	--	Remediate
LL3SB-409M09	D	08/30/10	1.0 - 7.0	--	--	--	--	0.4 ^a	0.38	0.47 ^a	0.045 ^a	--	--	--	--	--	Remediate
LL3SB-409M11	D	08/30/10	1.0 - 7.0	--	--	--	--	0.2 ^a	0.21	0.28 ^a	--	--	--	--	--	--	Remediate
LL3sb-414M	ISM	06/29/11	1.0 - 3.0	--	--	--	--	0.71 ^a	0.58	0.76 ^a	0.12 ^a	--	--	--	--	--	Remediate
LL3sb-414M	ISM	06/29/11	3.0 - 5.0	--	--	--	--	63	47	54	7.2	21	--	--	--	--	Remediate
LL3sb-415M	ISM	06/29/11	3.0 - 5.0	--	--	--	--	0.36 ^a	0.4	0.48 ^a	0.065 ^a	--	--	--	--	--	Remediate
LL3ss-266M	ISM	06/25/08	0.0 - 1.0	--	--	--	--	0.286 ^a	0.268	0.223 ^a	--	--	--	--	--	--	Remediate
Building EB-11																	
LL3ss-073-cs	ISM	10/22/07	2.5 - 3.5	--	--	--	--	--	--	--	--	--	--	--	13.8	--	Remediate
LL3-074	D	08/09/01	0.0 - 1.0	--	--	--	--	0.17 ^a	0.21	0.32 ^a	--	--	--	--	--	--	NFA
Building EA-7																	
LL3-054	D	08/10/01	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	--	17	--	Remediate
Building EA-21																	
No COCs were identified in Building EA-21.																	
Building EB-4																	
LL3-104	D	08/08/01	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	--	2.3	--	Remediate
LL3-227	D	08/24/01	0.0 - 1.0	--	--	37	--	--	--	--	--	--	--	--	--	--	Remediate
LL3sb-413M	ISM	06/30/11	1.0 - 3.0	--	--	--	--	--	--	--	--	--	--	--	100	5 ^a	Remediate
LL3ss-077-cs	ISM	11/20/07	2.5 - 3.5	--	--	--	--	--	--	--	--	--	--	--	6.09	--	Remediate
LL3ss-085-cs	ISM	10/31/07	2.5 - 3.5	--	--	--	--	--	--	--	--	--	--	--	3.38	--	Remediate
LL3ss-253M	ISM	06/15/10	3.3 - 4.3	--	--	37.5	--	0.147 ^{a,b}	--	0.0862 ^{a,b}	--	--	--	--	1.28	--	Remediate
LL3ss-297M	ISM	06/16/10	3.9 - 4.9	--	--	29.3 ^a	--	0.093 ^{a,b}	--	0.0852 ^{a,b}	--	--	--	--	2.9	--	Remediate
LL3ss-355	ISM	12/03/09	0.0 - 0.5	--	--	--	--	0.21 ^a	0.11 ^a	0.21 ^a	--	--	--	0.27 ^a	0.86 ^a	--	NFA
Building EA-6																	
LL3-057	D	07/31/01	0.0 - 1.0	--	--	52 ^b	--	4.8	5.8	7	0.74	2.4	--	--	--	--	Remediate
LL3-060	D	07/31/01	0.0 - 1.0	--	--	--	--	--	--	--	--	--	--	--	4	--	Remediate
LL3-063	D	07/31/01	0.0 - 1.0	--	--	650 ^b	--	5.7	5.4	5.5	0.93	3	--	--	14 ^b	--	Remediate
LL3-063	D	08/07/01	1.0 - 3.0	--	--	240	--	--	--	--	--	--	--	--	--	--	NFA
LL3ss-293M	ISM	06/04/10	4.7 - 5.7	--	--	--	--	7.57	5.88	4.6	0.847	--	--	--	--	--	Remediate
West Perimeter Area																	
LL3-050(p2)	D	08/08/01	0.0 - 0.5	--	--	--	--	2.8	3	4.2	0.41	1.3	--	--	--	--	Remediate
LL3sd-416M	ISM	07/02/11	0.0 - 0.5	--	--	--	--	8.6	6.8	9.1	1.2	4.1	--	--	--	--	Remediate
Building EB-4A																	
LL3-117	D	08/06/01	0.0 - 1.0	--	432	--	34 ^a	--	--	--	--	--	1.2	--	15	--	NFA
LL3ss-098-cs	ISM	09/21/07	2.0 - 3.0	--	--	83	--	--	--	--	--	--	--	--	--	--	Remediate
LL3ss-256M	ISM	06/26/08	0.0 - 1.0	--	--	51	--	0.772 ^a	0.622	0.478 ^a	--	--	--	--	1.38	--	Remediate
LL3ss-258M	ISM	06/27/08	0.0 - 1.0	--	--	40.9	--	--	--	--	--	--	--	--	--	--	Remediate
LL3ss-419M	ISM	07/02/11	0.0 - 1.0	--	--	--	--	0.48 ^a	0.4	0.44 ^a	0.056 ^a	--	--	--	--	--	Remediate

Table 2-14. Summary of Human Health COC Concentrations and Conclusions for Unrestricted (Residential) Land Use at Load Line 3 (continued)

Station	Sample Type	COC														Conclusion for Unrestricted Land Use	
		Residential RGO		Metals		Explosives		PAHs					Pesticide		PCB		
				6.8	400	36	61	1.6	0.16	1.6	0.16	1.6	0.34	1.3	PCB-1254		PCB-1260
Date	Depth (ft)	Arsenic	Lead	TNT	RDX	B(a)A	B(a)P	B(a)F	DA	IP	Dieldrin	Heptachlor					
Building EB-9A																	
LI3ss-265M	ISM	06/24/08	0.0 - 1.0	—	—	700	—	—	—	—	—	—	—	—	—	Remediate	
LL3ss-421M	ISM	07/02/11	0.0 - 1.0	—	—	—	—	0.25 ^c	0.26	0.4 ^d	0.06 ^e	0.2 ^e	—	—	—	NFA	
Building EB-25																	
No COCs were identified in Building EB-25.																	
Building EA-6A																	
LL3-064	D	07/31/01	0.0 - 1.0	—	—	—	—	0.79 ^e	0.6	0.67 ^e	0.12 ^e	—	—	—	—	NFA	
LL3-065	D	08/07/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	1.3	—	NFA	
LL3-066	D	08/08/01	0.0 - 1.0	—	—	—	—	0.19 ^e	0.14 ^e	0.21 ^e	—	—	—	—	1.4 ^e	NFA	
LL3-067	D	07/31/01	0.0 - 1.0	—	758	—	—	—	—	—	—	—	—	5.6	—	Remediate	
LL3-152	D	08/13/01	0.0 - 1.0	—	—	—	—	0.69 ^e	0.7	0.98 ^e	0.097 ^e	—	—	—	—	NFA	
LL3ss-261M	ISM	06/07/10	5.3 - 6.3	—	—	28.1 ^e	—	0.323 ^e	0.249	0.2 ^d	—	—	—	—	—	NFA	
Isolated Discrete Soil Samples																	
LL3-047(p2)	D	08/08/01	0.0 - 0.5	22.3 ^e	—	—	—	—	0.099 ^{a,b}	—	—	—	—	9	—	Remediate	
LL3-056	D	08/10/01	0.0 - 1.0	—	—	—	—	—	—	—	—	—	—	1.5	—	NFA	
LL3-056	D	08/12/01	1.0 - 3.0	—	—	500	—	—	—	—	—	—	—	—	—	Remediate	
LL3-136	D	08/10/01	0.0 - 1.0	—	—	—	31 ^e	0.54 ^e	0.53	0.76 ^e	0.069 ^e	—	—	—	—	NFA	
LL3-138	D	08/10/01	0.0 - 1.0	—	—	—	—	—	0.12 ^e	0.16 ^e	—	—	—	2.5	—	NFA	
LL3-142	D	08/09/01	0.0 - 1.0	—	—	—	—	0.45 ^d	0.61	0.96 ^e	0.083 ^e	—	—	—	—	NFA	
LL3-144	D	08/09/01	0.0 - 1.0	—	634 ^b	—	—	—	—	—	—	—	—	14	—	Remediate	
LL3-145	D	08/09/01	0.0 - 1.0	—	572	—	—	—	—	—	—	—	—	—	—	NFA	
LI3sd/sw-048(d)	D	08/08/01	0.0 - 0.5	—	—	110	—	0.28 ^{a,b}	0.26 ^e	0.37 ^{a,e}	—	—	—	—	—	Remediate	

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

^bSample location is recommended for remediation for other chemicals of interest; however, this chemical is not recommended as a COC for remediation.

All units are mg/kg.

B(a)A = Benz(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

DA = Dibenz(a,h)anthracene.

ft = Feet.

IP = Indeno(1,2,3-cd)pyrene.

ISM = Incremental Sampling Methodology.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RDX = Hexahydro-1,3,5-Trinitro-1,3,5-Triazine.

RGO = Remedial Goal Option.

TNT = Trinitrotoluene.

— = Chemical is not a human health COC in this sample.

Table 2-15. Summary of Human Health COC Concentrations and Conclusions for Commercial/Industrial Land Use at Load Line 3

Station	Sample Type	Industrial RGO		COC								Conclusion for Commercial/Industrial Land Use
				Explosive		PAH				PCB		
		Date	Depth (ft)	510	280	29	2.9	29	2.9	9.7	9.9	
				TNT	RDX	B(a)A	B(a)P	B(b)F	DA	PCB-1254	PCB-1260	
Building EB-10												
LL3-092	D	08/07/01	0.0 - 1.0	--	--	--	--	--	--	20	--	NFA
LL3sb-414M	ISM	06/29/11	3.0 - 5.0	--	--	63	47	54	7.2	--	--	Remediate
Building EB-11												
LL3ss-073-cs	ISM	10/22/07	2.5 - 3.5	--	--	--	--	--	--	13.8	--	Remediate
Building EA-7												
LL3-054	D	08/10/01	0.0 - 1.0	--	--	--	--	--	--	17	--	Remediate
Building EA-21												
No COCs for the Industrial Receptor were identified in Building EA-21												
Building EB-4												
LL3sb-413M	ISM	06/30/11	1.0 - 3.0	--	--	--	--	--	--	100	5 ^a	Remediate
Building EA-6												
LL3-057	D	07/31/01	0.0 - 1.0	--	--	4.8 ^a	5.8	7 ^a	0.74 ^a	--	--	Remediate
LL3-063	D	07/31/01	0.0 - 1.0	650 ^b	--	--	5.4	--	0.93 ^a	14 ^b	--	Remediate
LL3ss-293M	ISM	06/04/10	4.7 - 5.7	--	--	7.57 ^a	5.88	4.6 ^a	0.847 ^a	--	--	Remediate
West Perimeter Area												
LL3-050(p2)	D	08/08/01	0.0 - 0.5	--	--	--	3	--	--	--	--	Remediate
LL3sd-416M	ISM	07/02/11	0.0 - 0.5	--	--	8.6 ^a	6.8	9.1 ^a	1.2 ^a	--	--	Remediate
Building EB-4A												
LL3-117	D	08/06/01	0.0 - 1.0	--	34 ^a	--	--	--	--	15	--	NFA
Building EB-9A												
LL3ss-265M	ISM	06/24/08	0.0 - 1.0	700	--	--	--	--	--	--	--	Remediate
Building EB-25												
No COCs for the Industrial Receptor were identified in Building EB-25												
Building EA-6A												
No COCs for the Industrial Receptor were identified in Building EA-6A												

Table 2-15. Summary of Human Health COC Concentrations and Conclusions for Commercial/Industrial Land Use at Load Line 3 (continued)

Station	Sample Type	Industrial RGO		COC								Conclusion for Commercial/Industrial Land Use
				Explosive		PAH				PCB		
				510	280	29	2.9	29	2.9	9.7	9.9	
		Date	Depth (ft)	TNT	RDX	B(a)A	B(a)P	B(b)F	DA	PCB-1254	PCB-1260	
LL3-056	D	08/12/01	1.0 - 3.0	--	--	--	--	--	--	--	--	NFA
LL3-144	D	08/09/01	0.0 - 1.0	--	--	--	--	--	--	14	--	Remediate

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

^bSample location is recommended for remediation for other chemicals of interest; however, this chemical is not recommended as a COC for remediation.

All units are mg/kg.

B(a)A = Benz(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

DA = Dibenzo(a,h)anthracene.

ft = Feet.

ISM = Incremental Sampling Methodology.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RDX = Hexahydro-1,3,5-Trinitro-1,3,5-Triazine.

RGO = Remedial Goal Option.

TNT = Trinitrotoluene.

-- = Chemical is not a human health COC in this sample.

Table 7-5-A Ravenna LL 3 Surface and Subsurface Soil Sampling Results: Metals

				Location						Southwest & northwest sides of Bldg. EB-10, 20						Northeast & southeast side of Bldg. EB-10, 20						RI Discrete Sample Locations						% RSD
				Sample ID		LL3SB-414M-0101-SO		LL3SB-414M-0102-SO		LL3SB-414M-0103-SO		LL3SB-415M-0101-SO		LL3SB-415M-0102-SO		LL3SB-415M-0103-SO		LL3SD-416M-0001-SO		LL3SD-417M-0001-SO		LL3SD-418M-0001-SO						
				Type Sample		Primary		Primary		Primary		Primary		Primary		Primary		Primary		QC		QA						
				Sample Date		6/29/2011		6/29/2011		6/29/2011		6/29/2011		6/29/2011		6/29/2011		7/6/2011		7/6/2011		6/26/2011						
				Sample Depth		1 - 3		3 - 5		5 - 7		1 - 3		3 - 5		5 - 7		0 - 0.5		0 - 0.5		0 - 0.5						
				Min REC or RSL																								
Analyte		Units	Value	REC or RSL	Value	Q	Value	Q	Value	Q	Value	Q	Value	Q	Value	Q	Value	Q	Value	Q	Value	Q						
Metals	Aluminum	mg/kg	34,960	NG													10000 D		9400 D		10600 B		6.0					
	Antimony	mg/kg	136	RFA													1.4 J-		1.5 J-		5.9		87.6					
	Arsenic	mg/kg	19.8	BKG1		11 J-		7.5 J-		9.5 J-		11		13		19		14 J-		13 J-		12.9		4.6				
	Barium	mg/kg	3,506	NG														150 J-		130 J-		158		9.9				
	Beryllium	mg/kg	160	RSL														1.3 D		1.2 D		1.2		4.7				
	Cadmium	mg/kg	109	NG														1.0 J		1.1 J		0.71		21.6				
	Calcium	mg/kg	NA	NA														15000 D		9800		10700 B		23.5				
	Chromium (as Cr-3)	mg/kg	196,942	NG														26 J-		31 J-		298		131.5				
	Cobalt	mg/kg	70.3	NG														21 J-		19 J-		13.3		22.5				
	Copper	mg/kg	27,138	RFA														9.6 J-		10 J-		18.6		39.9				
	Iron	mg/kg	NA	NA														24000		25000		43200		35.2				
	Lead	mg/kg	4,000	RSL														23 J-		22 J-		56.1		57.6				
	Magnesium	mg/kg	NA	NA														3400		2400		2780		17.6				
	Manganese (1' - 5')	mg/kg	1,450	BKG1														3700 J-		3400 J-		4880		19.6				
	Nickel	mg/kg	13,463	RFA														28 J-		30 J-		25.4		8.3				
	Potassium	mg/kg	NA	NA														730		670		1040		24.4				
	Selenium	mg/kg	390	RSL														1.1 J-		1.1 J-		2.4		48.9				
	Silver	mg/kg	3,240	RFA														0.43 U		0.5 U		0.017 U						
	Sodium	mg/kg	NA	NA														110		69 J		431		97.5				
	Thallium	mg/kg	47.6	RFA														0.16 J		0.13 J		4		155.6				
	Vanadium	mg/kg	1,558	RFA														23		23		20.8		5.7				
	Zinc	mg/kg	196,589	RFA														160 J-		170 J-		136 B		11.2				
	Chromium, hexavalent	mg/kg	16.4	NG														0.46 J		0.45 J		2.7 U						
	Mercury	mg/kg	165	RFA														0.30		0.33		0.23		17.9				
																						% RSD Average =		38.7				

See page 7-49 for a list of acronyms and definitions.

Table 2-19. Summary of Human Health COC Concentrations in Soil and Conclusions for Unrestricted (Residential) Land Use at Load Line 4

Station	Residential RGO		COC								Conclusion for Unrestricted (Residential) Land Use
			Metal	PAH					PCB		
	400	1.6	0.16	1.6	0.16	1.6	1.2	2.4			
Date	Depth (ft)	Lead	B(a)A	B(a)P	B(b)F	DA	IP	PCB-1254	PCB-1260		
Former Water Tower											
LL4-070	08/21/01	0 - 1	1340	--	--	--	--	--	--	Remediate	
LL4-068	08/21/01	0 - 1	599	--	--	--	--	--	--	Remediate	
LL4-069	08/21/01	0 - 1	414	--	--	--	--	--	--	Remediate	
Building G-16											
LL4-071	08/21/01	0 - 1	618 ^b	0.15 ^{a,b}	0.21 ^b	0.54 ^{a,b}	--	0.15 ^{a,b}	--	28	Remediate
Building G-9											
LL4-075	08/22/01	0 - 1	--	--	0.15 ^{a,b}	0.32 ^{a,b}	--	0.098 ^{a,b}	--	4.5	Remediate
LL4-076	08/22/01	0 - 1	--	--	0.19	0.3 ^a	--	0.19 ^a	--	0.18 ^a	NFA
LL4-078	08/22/01	0 - 1	--	--	--	--	--	--	--	2.6	Remediate
Building G-18											
LL4ss-219M	06/27/08	0 - 1	--	0.382 ^a	0.325	0.291 ^a	--	--	--	--	NFA
Building G-19											
LL4-095	08/22/01	0 - 1	501	--	--	--	--	--	--	--	NFA
Buildings G-12 and G-12A											
LL4-116	08/14/01	0 - 1	418	--	--	--	--	--	--	--	Remediate
LL4-113	08/21/01	0 - 1	--	--	0.77	1.3 ^a	0.38	1.4 ^a	--	--	Remediate
LL4-158	08/24/01	0 - 1	--	0.99 ^a	--	5.4	--	--	--	--	NFA
LL4ss-420M	06/26/11	0 - 1	--	0.48 ^a	0.38	0.51 ^a	0.065 ^a	--	--	--	Remediate
Building G-8											
LL4SB-402M	08/16/10	1 - 3.0	--	0.13 ^a	0.17	0.28 ^a	0.033 ^a	--	--	--	Remediate
LL4SB-402M	08/16/10	3.0 - 5.0	--	4.1	3.7	4.5	0.48	2.1	--	--	Remediate
LL4SB-402M	08/16/10	5.0 - 7.0	--	2.2	1.9	2.4	0.3	--	--	--	Remediate
LL4SB-402M07	08/16/10	1 - 7.0	--	54	51	61	6.2	29	--	--	Remediate
LL4SB-402M10	08/16/10	1 - 7.0	--	--	0.28	0.65 ^a	0.062 ^a	0.2 ^a	--	--	Remediate
LL4SB-402M11	08/16/10	1 - 7.0	--	0.29 ^a	0.38	0.46 ^a	0.059 ^a	0.3 ^a	--	--	Remediate
LL4sb-407M	06/27/11	1 - 3.0	--	3.3	2.9	3.1	0.38	1.6	--	--	Remediate
LL4sb-407M	06/27/11	3.0 - 5.0	--	0.62 ^a	0.53	0.63 ^a	0.069 ^a	--	--	--	Remediate
LL4sb-410M	06/27/11	5.0 - 7.0	--	0.56 ^a	0.57	1.1 ^a	0.16	--	--	--	Remediate
LL4sb-411M	06/27/11	1 - 3.0	--	0.16 ^a	0.16 ^a	0.31 ^a	0.036 ^a	--	--	--	Remediate
LL4ss-206M	07/01/08	0 - 1	--	2.02	2	1.94	0.327	--	--	--	Remediate

Table 2-19. Summary of Human Health COC Concentrations in Soil and Conclusions for Unrestricted (Residential) Land Use at Load Line 4
(continued)

Station	Residential RGO		COC								Conclusion for Unrestricted (Residential) Land Use
			Metal	PAH					PCB		
			400	1.6	0.16	1.6	0.16	1.6	1.2	2.4	
	Date	Depth (ft)	Lead	B(a)A	B(a)P	B(b)F	DA	IP	PCB- 1254	PCB- 1260	
Building G-10											
LL4-117	08/21/01	0 - 1	--	--	--	--	--	--	2.9	--	Remediate
Building G-6											
LL4-141	08/14/01	0 - 1	--	0.53 ^a	0.5	0.67 ^a	0.085 ^a	--	--	--	Remediate
North of Building G-1A											
LL4-185	08/11/01	0 - 0.5	563	--	--	--	--	--	--	--	Remediate
Building G-4											
LL4-131	08/14/01	0 - 1	987	--	--	--	--	--	--	--	NFA

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

^bSample location is recommended for remediation for other chemicals of interest; however, this chemical is not recommended as a COC for remediation.

All units are mg/kg.

B(a)A = Benz(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

D = Discrete soil sample.

DA = Dibenzo(a,h)anthracene.

ft = Feet.

IP = Indeno(1,2,3-cd)pyrene.

ISM = Incremental Sampling Methodology.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RGO = Remedial Goal Option.

-- = Chemical is not a human health COC in this sample.

Table 2-20. Summary of Human Health COC Concentrations in Soil and Conclusions for Industrial/Commercial Land Use at Load Line 4

Station	Industrial RGO		COC						Conclusion for Commercial/Industrial Land Use
			Metals	PAHs				PCBs	
	Date	Depth (ft)	800	29	2.9	29	2.9	9.9	
			Lead	B(a)A	B(a)P	B(b)F	DA	PCB-1260	
<i>Former Water Tower</i>									
LL4-070	08/21/01	0 - 1	1340	--	--	--	--	--	Remediate
<i>Building G-16</i>									
LL4-071	08/21/01	0 - 1	--	--	--	--	--	28	Remediate
<i>Building G-8</i>									
LL4SB-402M	08/16/10	3 - 5	--	4.1 ^a	3.7	4.5 ^a	0.48 ^a	--	Remediate
LL4SB-402M07	08/16/10	1 - 7	--	54	51	61	6.2	--	Remediate
<i>Building G-4</i>									
LL4-131	08/14/01	0 - 1	987	--	--	--	--	--	NFA

^aSample concentration is less than RGO; however, this chemical contributes to a sum of ratios greater than 1.

All units are mg/kg.

B(a)A = Benz(a)anthracene.

B(a)P = Benzo(a)pyrene.

B(b)F = Benzo(b)fluoranthene.

COC = Chemical of Concern.

DA = Dibenzo(a,h)anthracene.

ft = Feet.

NFA = No further action or evaluation required for this COC.

PAH = Polycyclic Aromatic Hydrocarbon.

PCB = Polychlorinated Biphenyl.

RGO = Remedial Goal Option.

-- = Chemical is not a human health COC in this sample.

ATTACHMENT 12
Responses to Regulator Comments