

## 2.0 ENVIRONMENTAL SETTING

This chapter describes the physical characteristics of Load Line 4 and the surrounding environment that are factors in understanding potential contaminant transport pathways, receptors, and exposure scenarios for human health and ecological risks. The geology, hydrology, climate, and ecological characteristics of RVAAP were originally presented in Chapter 3.0 of the Phase I RI (USACE 1998). The preliminary CSM for Load Line 4 is presented at the end of this chapter.

### 2.1 RVAAP PHYSIOGRAPHIC SETTING

RVAAP is located within the Southern New York Section of the Appalachian Plateaus physiographic province (USGS 1968). This province is characterized by elevated uplands underlain primarily by Mississippian and Pennsylvanian age bedrock units that are horizontal or gently dipping. The province is characterized by its rolling topography with incised streams having dendritic drainage patterns. The Southern New York Section has been modified by glaciation, which rounded ridges and filled major valleys and blanketed many areas with glacially derived unconsolidated deposits (i.e., sand, gravel, and finer-grained outwash deposits). As a result of glacial activity in this section, old stream drainage patterns were disrupted in many locales, and extensive wetland areas were developed.

### 2.2 SURFACE FEATURES AND SITE TOPOGRAPHY

Load Line 4 is situated in the southeastern quadrant of the RVAAP facility, as shown in [Figure 1-2](#). The topography within the AOC is subdued on a glacial till surface. Topography of Load Line 4 was mapped by USACE in 1998 on a 0.6-m (2-ft) contour interval, with an accuracy of 0.006 m (0.02 ft), from aerial photographs taken in 1997. This survey is the basis for the topographic features presented in the figures in this Phase II RI report. Elevations within the bounds of the AOC vary from approximately 299 to 305 m (980 to 1,000 ft) above mean sea level (amsl). The overall topography slopes very gently from north to south within the AOC with localized steeper slopes cut along the main stream and southwest edge of the settling pond. [Figure 2-1](#) illustrates current site conditions in the former production area (March 2003).

Cultural features at Load Line 4 include asphalt and gravel access roads, man-made ditches, sanitary and storm sewer lines, manholes, railroad beds, and buildings. The main process area is heavily vegetated with rough grass and scrub vegetation between the major structures of the load line. Scrub vegetation and immature hardwoods characterize the non-production areas around the main process area. Moderately mature hardwoods exist along the northern portion of the load line.

### 2.3 SOILS AND GEOLOGY

#### 2.3.1 Regional Geology

The regional geology at RVAAP consists of horizontal to gently dipping bedrock strata of Mississippian and Pennsylvanian age overlain by varying thicknesses of unconsolidated glacial deposits. The bedrock and unconsolidated geology at RVAAP and geology specific to Load Line 4 are presented in the following subsections.




**Figure 2-1. Site Conditions at Load Line 4, March 2003**

### **2.3.1.1 Soils and glacial deposits**

Bedrock at RVAAP is overlain by deposits of the Wisconsin-aged Lavery Till in the western portion of the facility and the younger Hiram Till and associated outwash deposits in the eastern portion (Figure 2-2) (ODNR 1982). Unconsolidated glacial deposits vary considerably in their character and thickness across RVAAP, with these deposits absent in some of the eastern portion of the facility to an estimated 46 m (150 ft) in the south-central portion.

Thin coverings of glacial materials have been completely removed as a consequence of human activities at locations such as Ramsdell Quarry, and bedrock is present at or near the ground surface in many locations, such as at Load Line 1 and the Erie Burning Grounds (USACE 2001b). Where glacial materials are still present, their distribution and character indicate a ground moraine origin. These tills consist of laterally discontinuous assemblages of yellow-brown, brown, and gray silty clays to clayey silts, with sand and rock fragments. Deposits from bodies of glacial-age standing water may also have been encountered, in the form of >15-m (50-ft) -thick deposits of uniform light gray silt (USACE 2001b).

Soils at RVAAP are generally derived from the Wisconsin-age silty clay glacial till. Distributions of soil types are discussed and mapped in the Soil Survey of Portage County, Ohio (USDA 1978). Much of the native soil at RVAAP was reworked or removed during construction activities in operational areas of the installation. According to the Portage County soil survey, the major soil types found in the high-priority AOCs are silt or clay loams with permeabilities ranging from  $6.0 \times 10^{-7}$  to  $1.4 \times 10^{-3}$  cm/sec.

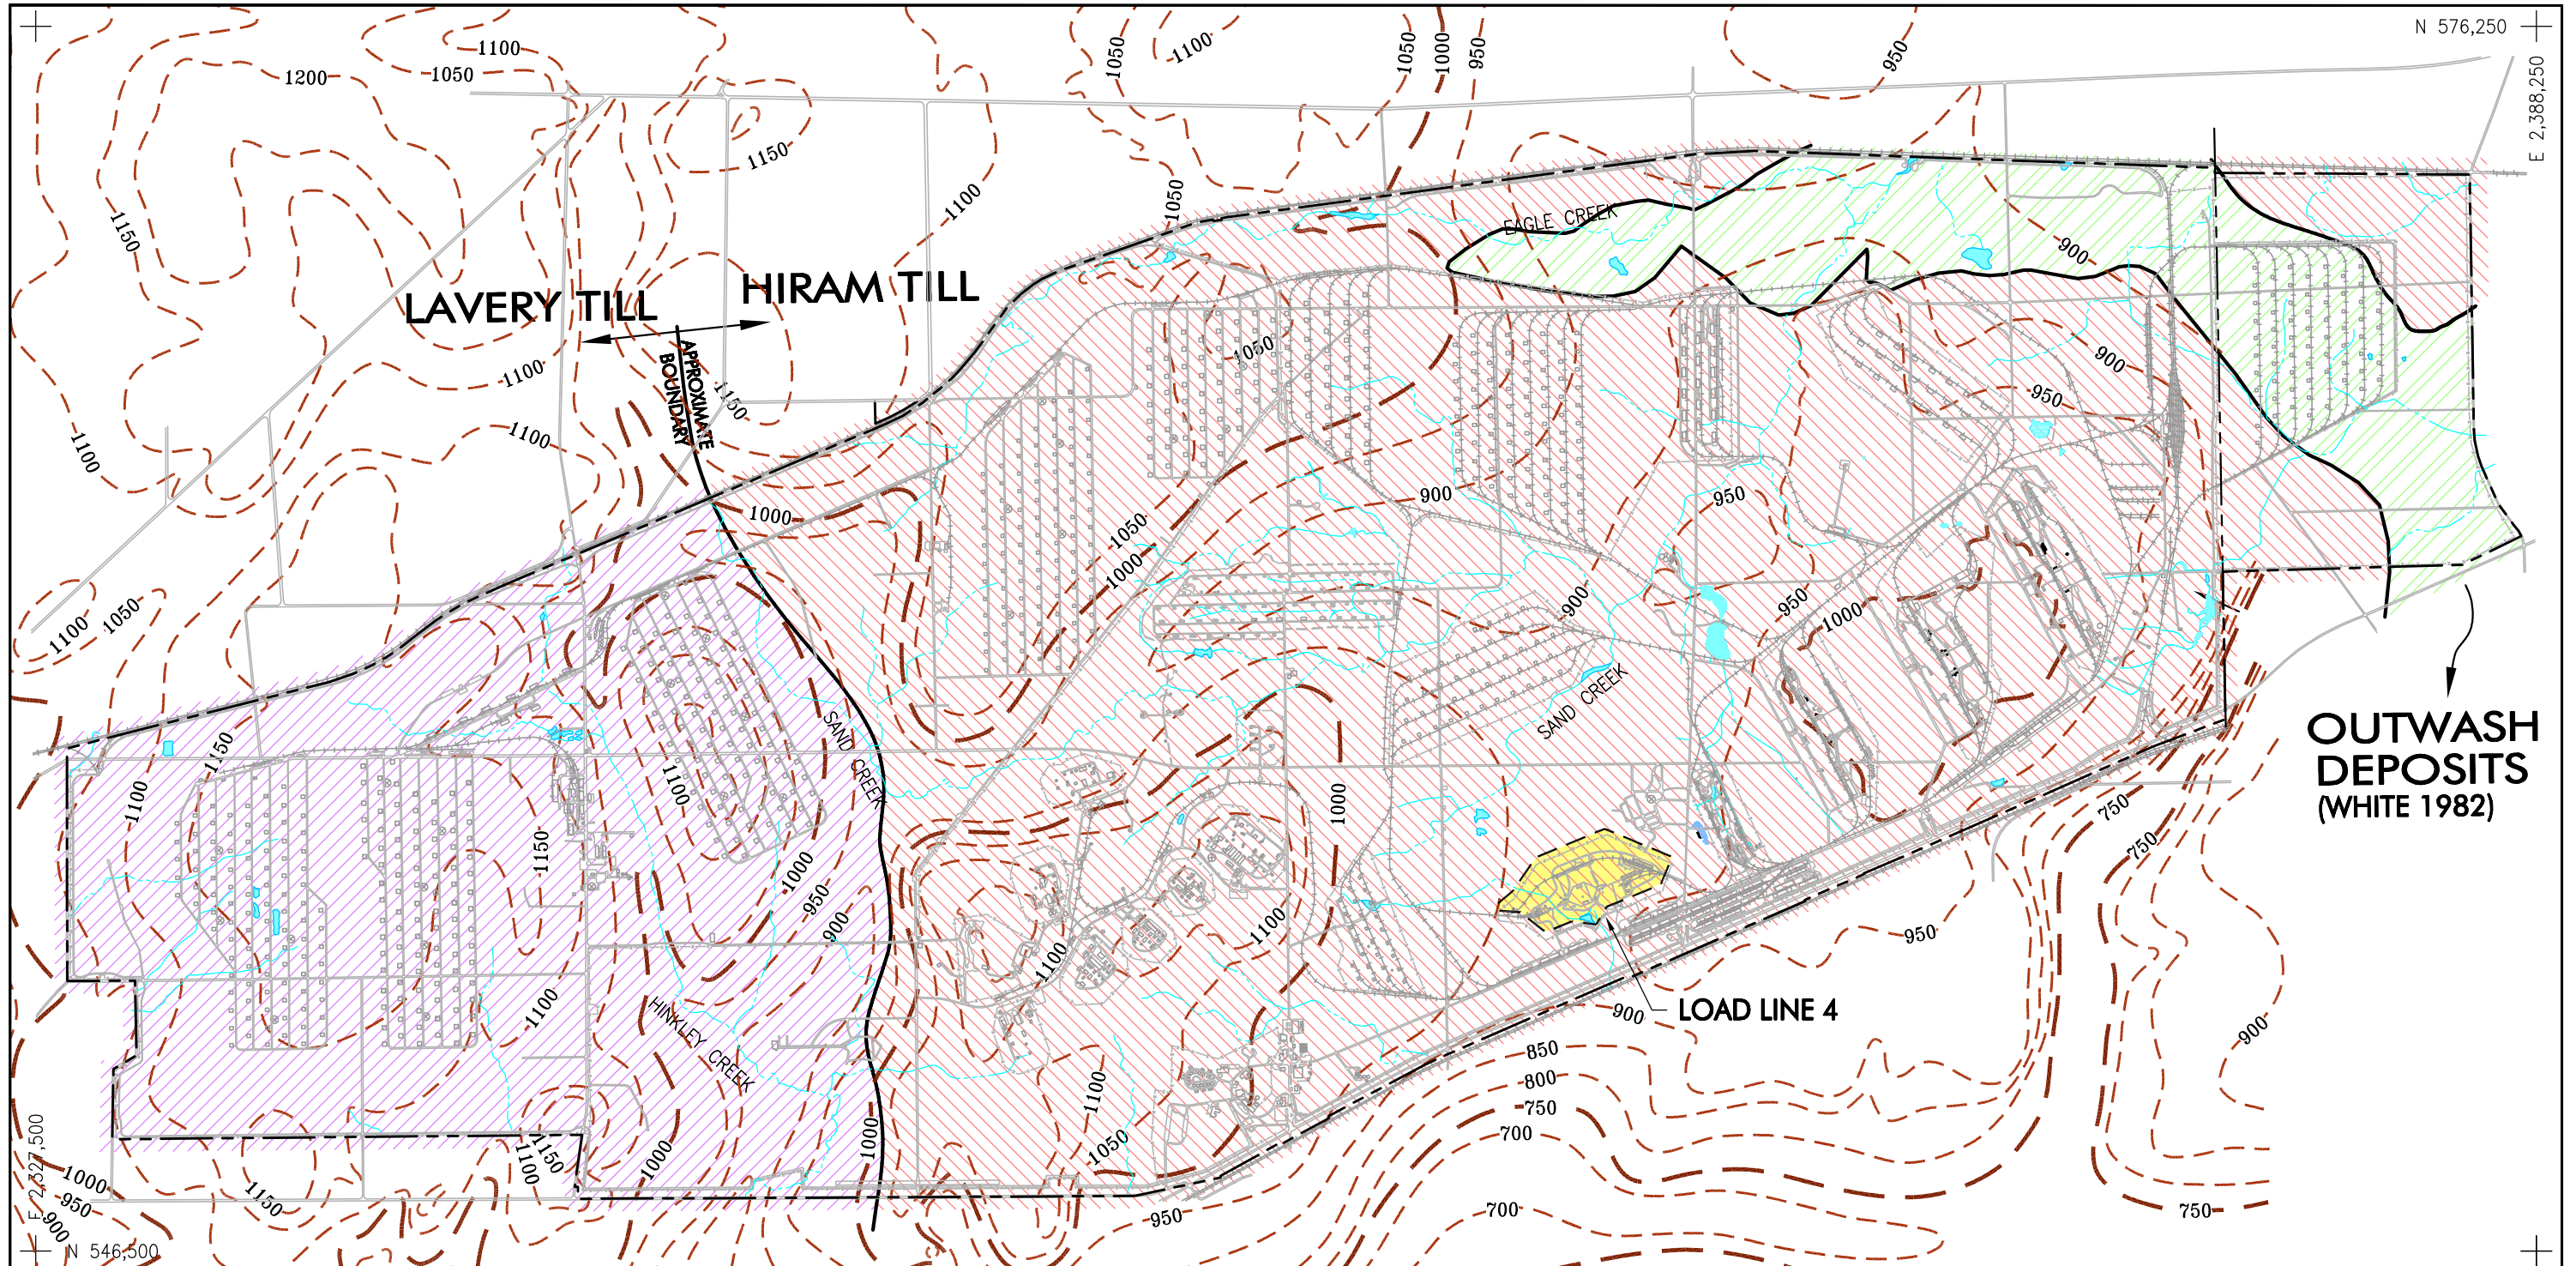


**LEGEND:**


- ..... PROPERTY BOUNDARY
- ..... STREAM OR CREEK
- ..... POND
- ..... BEDROCK SURFACE CONTOUR (50-FT INTERVAL)
- ..... BEDROCK SURFACE CONTOUR (250-FT INTERVAL)
- ..... LAVERY TILL
- ..... HIRAM TILL
- ..... OUTWASH DEPOSITS
- ..... LOAD LINE 2

**DATA SOURCE:**

- 1.) SLUCHER, 1996. BEDROCK TOPOGRAPHY OF THE WINDHAM AND RAVENNA, OHIO, QUADRANGLES (ELEVATION ABOVE SEA LEVEL OF BEDROCK SURFACE) CONTOUR INTERVAL = 50 FT.


**U.S. ARMY ENGINEER DISTRICT**  
 CORPS OF ENGINEERS  
 LOUISVILLE, KENTUCKY  
US Army Corps of Engineers  
Louisville District

**RAVENNA ARMY AMMUNITION PLANT**  
**RAVENNA, OHIO**

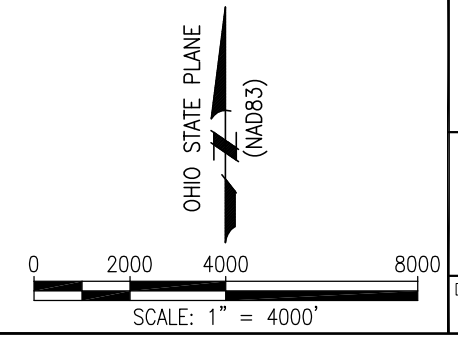

DRAWN BY: S.DUNLAP	REV. NO./DATE: 0 / 04-08-03	CAD FILE: /00066/DWGS/R73GEOL4
-----------------------	--------------------------------	-----------------------------------

Figure 2-2. Geologic Map of Unconsolidated Deposits at RVAAP

### **2.3.1.2 Bedrock stratigraphy**

The bedrock encountered in studies of RVAAP includes Formations of Mississippian and Pennsylvanian age, which dip to the south at a rate of approximately 5-10 ft/mile. The Mississippian Cuyahoga Group is present at depths of approximately 200 ft below ground surface (bgs) throughout the majority of the site. However, the Meadville Shale Member of the Cuyahoga Group is present at or near the surface in the very northeastern corner of RVAAP. The Meadville Shale is a blue-gray silty shale characterized by alternating thin beds of sandstone and siltstone.

The Sharon Member of the Pennsylvanian Pottsville Formation unconformably overlies the Meadville Shale Member of the Mississippian Cuyahoga Group. The unconformity has a relief of as much as 200 ft in Portage County, and this is reflected in the variation of thickness of the Sharon Member. The Sharon Member consists of two units: a shale and a conglomerate. The Sharon Conglomerate unit of the Sharon Member is a highly porous, permeable, cross-bedded, frequently fractured and weathered orthoquartzite sandstone, which is only locally conglomeratic, and exhibits an average thickness of 100 ft. The conglomerate unit of the Sharon Member has a thickness of as much as 250 ft where it was deposited in a broad channel cut into Mississippian rocks. In marginal areas of the channel, the conglomerate unit thins to about 20 ft and in places may be missing owing to non-deposition on the uplands of the early Pennsylvanian erosion surface. Thin shale lenses occur sporadically within the upper part of the conglomerate unit.

The shale unit of the Sharon Member (informally referred to as the Sharon Shale) is a light to dark-gray fissile shale, which overlies the conglomerate in some locations, but has been eroded in most areas of RVAAP. The Sharon Member outcrops in many locations in the eastern half of RVAAP.

In the western half of RVAAP, the remaining members of the Pottsville Formation found in the local area overlie the Sharon Member. These remaining members of the Pottsville Formation are not found in the eastern half of the site either because the land surface was above the level of deposition or they were eroded. The Connoquenessing Sandstone Member, which unconformably overlies the Sharon, is a sporadic, relatively thin channel sandstone comprised of gray to white, coarse-grained quartz with a higher percentage of feldspar and clay than the Sharon Conglomerate. The Mercer Member is found above the Connoquenessing Sandstone and consists of silty to carbonaceous shale with many thin and discontinuous lenses of sandstone in its upper part. The Homewood Sandstone Member unconformably overlies the Mercer and is the uppermost unit of the Pottsville Formation. The Homewood occurs as a caprock on bedrock hills in the subsurface and ranges from a well-sorted, coarse-grained, white quartz sandstone to a tan, poorly sorted, clay-bonded, micaceous, medium- to fine- grained sandstone.

## **2.3.2 Geologic Setting of Load Line 4**

Subsurface characterization at Load Line 4 during the Phase II RI was performed by installing six test trenches to depths of 3.65 m (14 ft) around the periphery of the AOC, and by continuous sampling during the drilling of monitoring well borings. Hand auger borings from soil sampling locations were also used to characterize the shallow subsurface soil interval. Geologic information obtained from the test pits and borings at Load Line 4 was used to update the CSM initially developed based on Phase I RI data and presented in the Phase II RI SAP Addendum (Chapter 8.0).

### **2.3.2.1 Soils**

At Load Line 4, soils of the Mahoning series are present. The Mahoning series soils are poorly drained, silty clay loam or clay loam formed over glacial till where bedrock is generally greater than 1.8 m (6 ft). Runoff is typically medium to rapid, and the soil is seasonally wet. Permeabilities range from 1.52 to 5.08 cm (0.6 to 2.0 in.) per hour.

Test pits and monitoring well borings provide the general geologic characteristics noted below for the unconsolidated zone underlying Load Line 4. A generalized geologic cross section for the AOC from east to west is provided in [Figure 2-3](#). Surface soil at Load Line 4 varies widely in character from one area to another due to lateral discontinuity within the glacial till and site disturbances; however, sandy silts dominate in the near surface interval. As noted in the boring logs for hand-augered soil sampling stations (Appendix A), some areas of the load line have been substantially reworked and contain sandy fill, gravel, ballast material, and slag. Concrete, rebar, nails, glass, paint chips, etc. exist at the ground surface in many areas, especially in the vicinity of buildings. In comparatively undisturbed areas where some test pits were excavated, the surface soil interval consisted of a light yellow brown (10YR6/4) sandy silt. Geotechnical data collected during the Phase II RI are presented in Chapter 4.0 and in the geotechnical laboratory report provided in Appendix K of this RI Report. Geologic logs for monitoring wells are in Appendix C and those for test pits are in Appendix E.

The following general unconsolidated zone characteristics below the surface soil layer were synthesized from boring and test pit data.

- At depths ranging from 0 to 2.1 m (0 to 7 ft) bgs, unconsolidated deposits consist primarily of a brown (10YR4/3) to yellowish-brown (10YR5/4), silty sand to sandy silt with some gravel. On average, this unconsolidated interval was 1 m (3 ft) thick and had a stiff consistency, low plasticity, and widely variable moisture content (dry to moist) depending on location.
- At depths ranging from 0.6 to 5.2 m (2 to 17 ft) bgs, a gray to dark yellowish brown silty clay or clayey silt occurs. In some borings, intermittent gravel was observed.
- Below the clayey silt layer described above, a gray to yellowish-brown sand and silty sand was encountered at depths ranging from 2.1 to 6.1 m (7 to 20 ft) bgs.
- In the deepest borings drilled during the Phase II RI, a gray silty clay was encountered at depths of approximately 4.9 to 6.1 m (16 to 20 ft) bgs.

### **2.3.2.2 Bedrock geology**

Bedrock was not encountered in any boring drilled during the Phase II RI at Load Line 4; the deepest boring was drilled to approximately 6.7 m (22 ft) bgs. Drilling logs from historical water supply wells in the vicinity of the load line, which were installed to depths of 30.5 m (100 ft) or more, indicate that the unconsolidated zone is underlain by the Sharon Conglomerate. Detailed information on structural or lithological characteristics of the bedrock interval at Load Line 4 is not available from these historical logs.

During investigations at Load Lines 1 through 3 and Load Line 12 to the east of Load Line 4, the Sharon Conglomerate unit of the Sharon Member (Pottsville Formation) was encountered. At these adjacent load lines, the unit is characterized by a light yellowish-brown to brownish-gray, fine- to medium-grained sandstone, which commonly contains iron-stained fractures. At Load Line 1 to the northeast, the Sharon Conglomerate consists of a relatively pure quartz sandstone with little observed shale. In the vicinity of Load Line 2, shale lenses typically 0.3 m (1 ft) in thickness or less, were commonly observed in subsurface borings. Shale lenses were encountered in borings drilled during the Phase II RI at Load Line 3 at a greater frequency and thickness than at Load Line 2. Further west at Load Line 12, an extensive dark gray shale was encountered in subsurface borings. The observed facies changes imply a change of depositional environment across the southeastern portion of the facility with energetic conditions in the Load Line 1 and Ramsdell Quarry area, and increasingly quiescent conditions towards the south-central portion of RVAAP (e.g., vicinity of Load Lines 12 and 4).

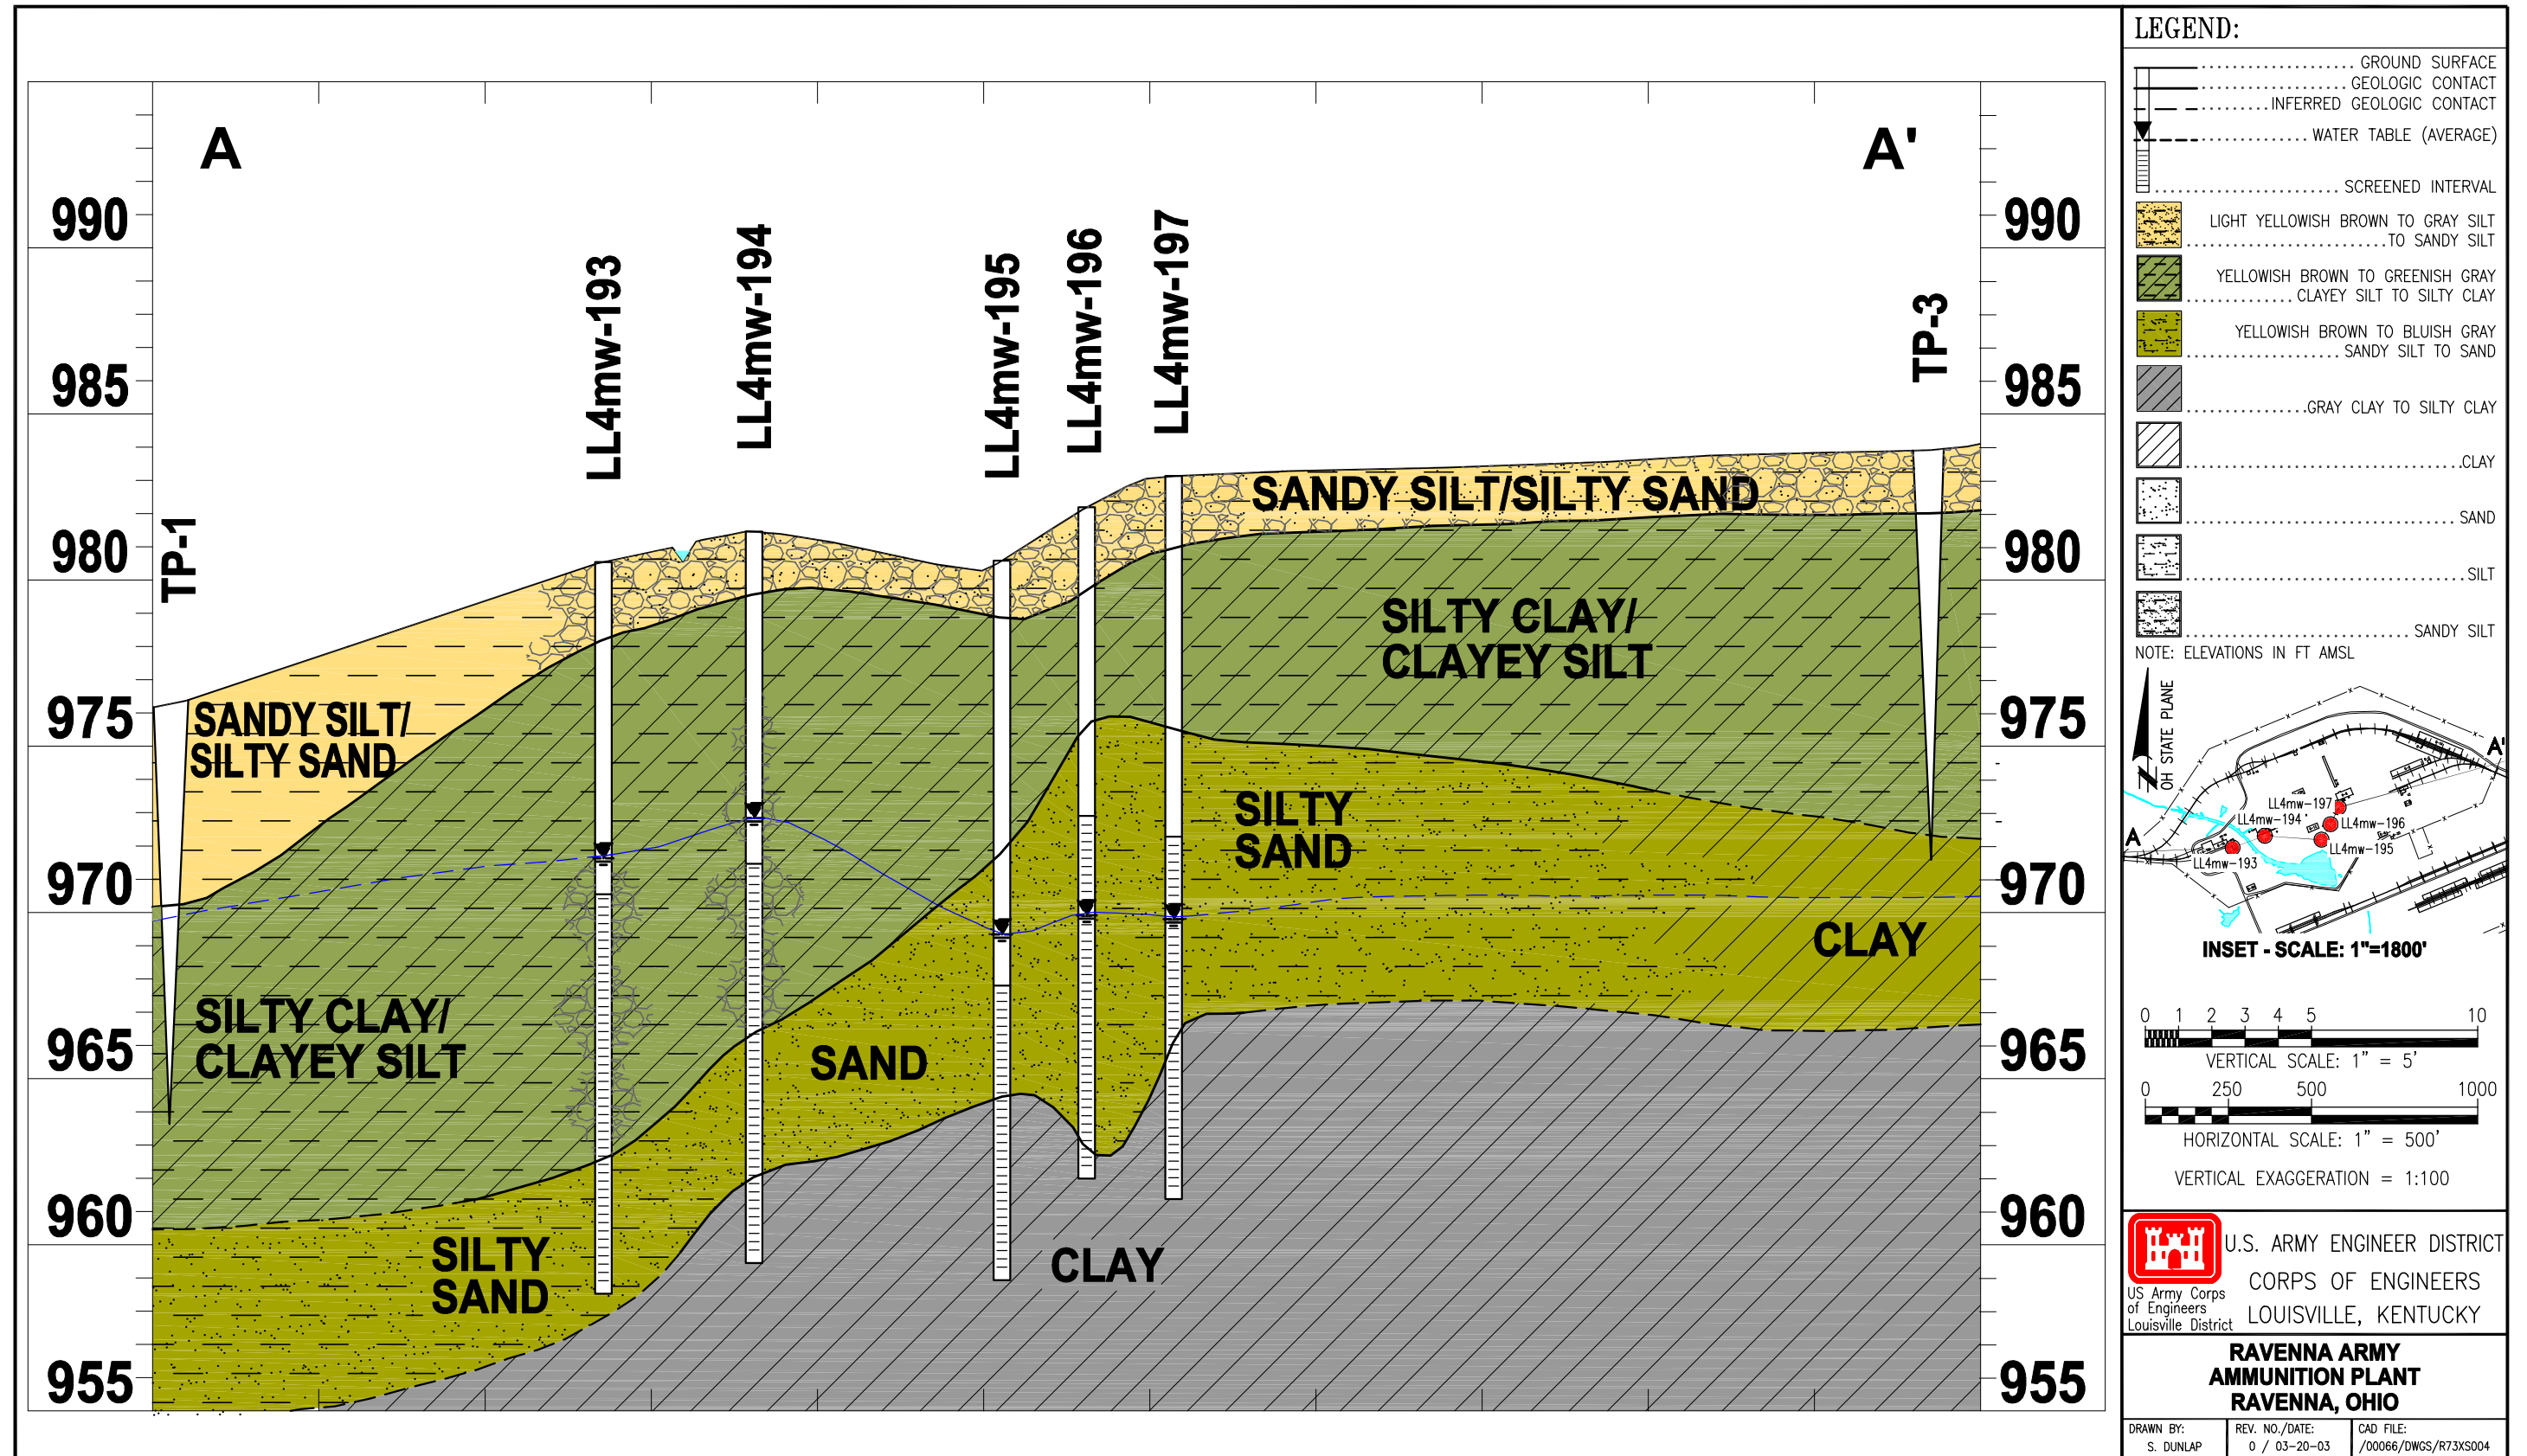


Figure 2-3. Generalized Geologic Cross Section at Load Line 4

## **2.4 HYDROLOGY**

### **2.4.1 Regional Hydrogeology**

Sand and gravel aquifers are present in the buried-valley and outwash deposits in Portage County, as described in the Phase I RI (USACE 1998). Generally, these saturated zones are too thin and localized to provide large quantities of water for industrial or public water supplies; however, yields are sufficient for residential water supplies. Lateral continuity of these aquifers is not known. Recharge of these units comes from surface water infiltration of precipitation and surface streams. Specific groundwater recharge and discharge areas at RVAAP have not been delineated. However, extensive upland areas, such as north of WBG and in the western portion of the facility, are presumed to be regional recharge zones. The major perennial surface water drainages (e.g., Sand Creek, Hinkley Creek, and Eagle Creek) are presumed to be the major groundwater discharge areas (Section 2.4.1.3).

#### **2.4.1.1 Unconsolidated sediment**


The thickness of the unconsolidated interval at RVAAP ranges from thin to absent in the eastern and northeastern portion of RVAAP to an estimated 45 m (150 ft) in the central portion of the installation. The groundwater table occurs within the unconsolidated zone in many areas of the installation. Because of the very heterogeneous nature of the unconsolidated glacial materials, groundwater flow patterns are difficult to determine with a high degree of accuracy. Vertical recharge from precipitation likely occurs via infiltration along root zones, desiccation cracks, and partings within the soil column. Laterally, most groundwater flow likely occurs along preferential pathways (e.g., sand seams, channel deposits, or other stratigraphic discontinuities) having higher permeabilities than surrounding clay or silt-rich materials. Available data indicate a wide-range of K values in the unconsolidated materials from as high as  $4 \times 10^{-2}$  cm/sec ( $1.31 \times 10^2$  ft/day) in sandy materials to as low as  $1 \times 10^{-7}$  cm/sec ( $2.83 \times 10^{-4}$  ft/day) for clays.

#### **2.4.1.2 Bedrock hydrogeology**

During the period of RVAAP operations, approximately 75 test wells were drilled for potable and industrial uses. Of these, only 15 were considered adequate producers. As of 1978, only five wells were used continuously (USATHAMA 1978). The sandstone facies of the Sharon Member, and in particular the Sharon Conglomerate, were the primary sources of groundwater during RVAAP's active phase, although some wells were completed in the Sharon Shale. Past studies of the Sharon Conglomerate indicate that the highest yields come from the quartzite pebble conglomerate facies and from jointed and fractured zones. Where it is present, the overlying Sharon Shale acts as a relatively impermeable confining layer for the sandstone. Hydraulic conductivities in wells completed in the Sharon Shale generally are much lower than those in the sandstone.

#### **2.4.1.3 Groundwater flow directions**

A facility-wide water table map was constructed using water-level measurements taken during a 2-day period (August 27 and 28, 2001) as part of the Phase II RI field investigation (Figure 2-4). Monitoring wells from which data were obtained are all screened within the uppermost groundwater interval at RVAAP, either at the water table or immediately below it. Both unconsolidated and bedrock zone wells are represented in the water level data set; thus, the potentiometric map presents a generalized representation of the water table surface. Perennial streams and ponds present at RVAAP were considered as expressions of the water table surface. Thus, to augment water level data in areas that did not have adequate well coverage, elevations of perennial streams and ponds, estimated from topographic base map files, were used to infer water table elevations. Topographic surface controls from base map files were also used to guide placement of water table isopleths.

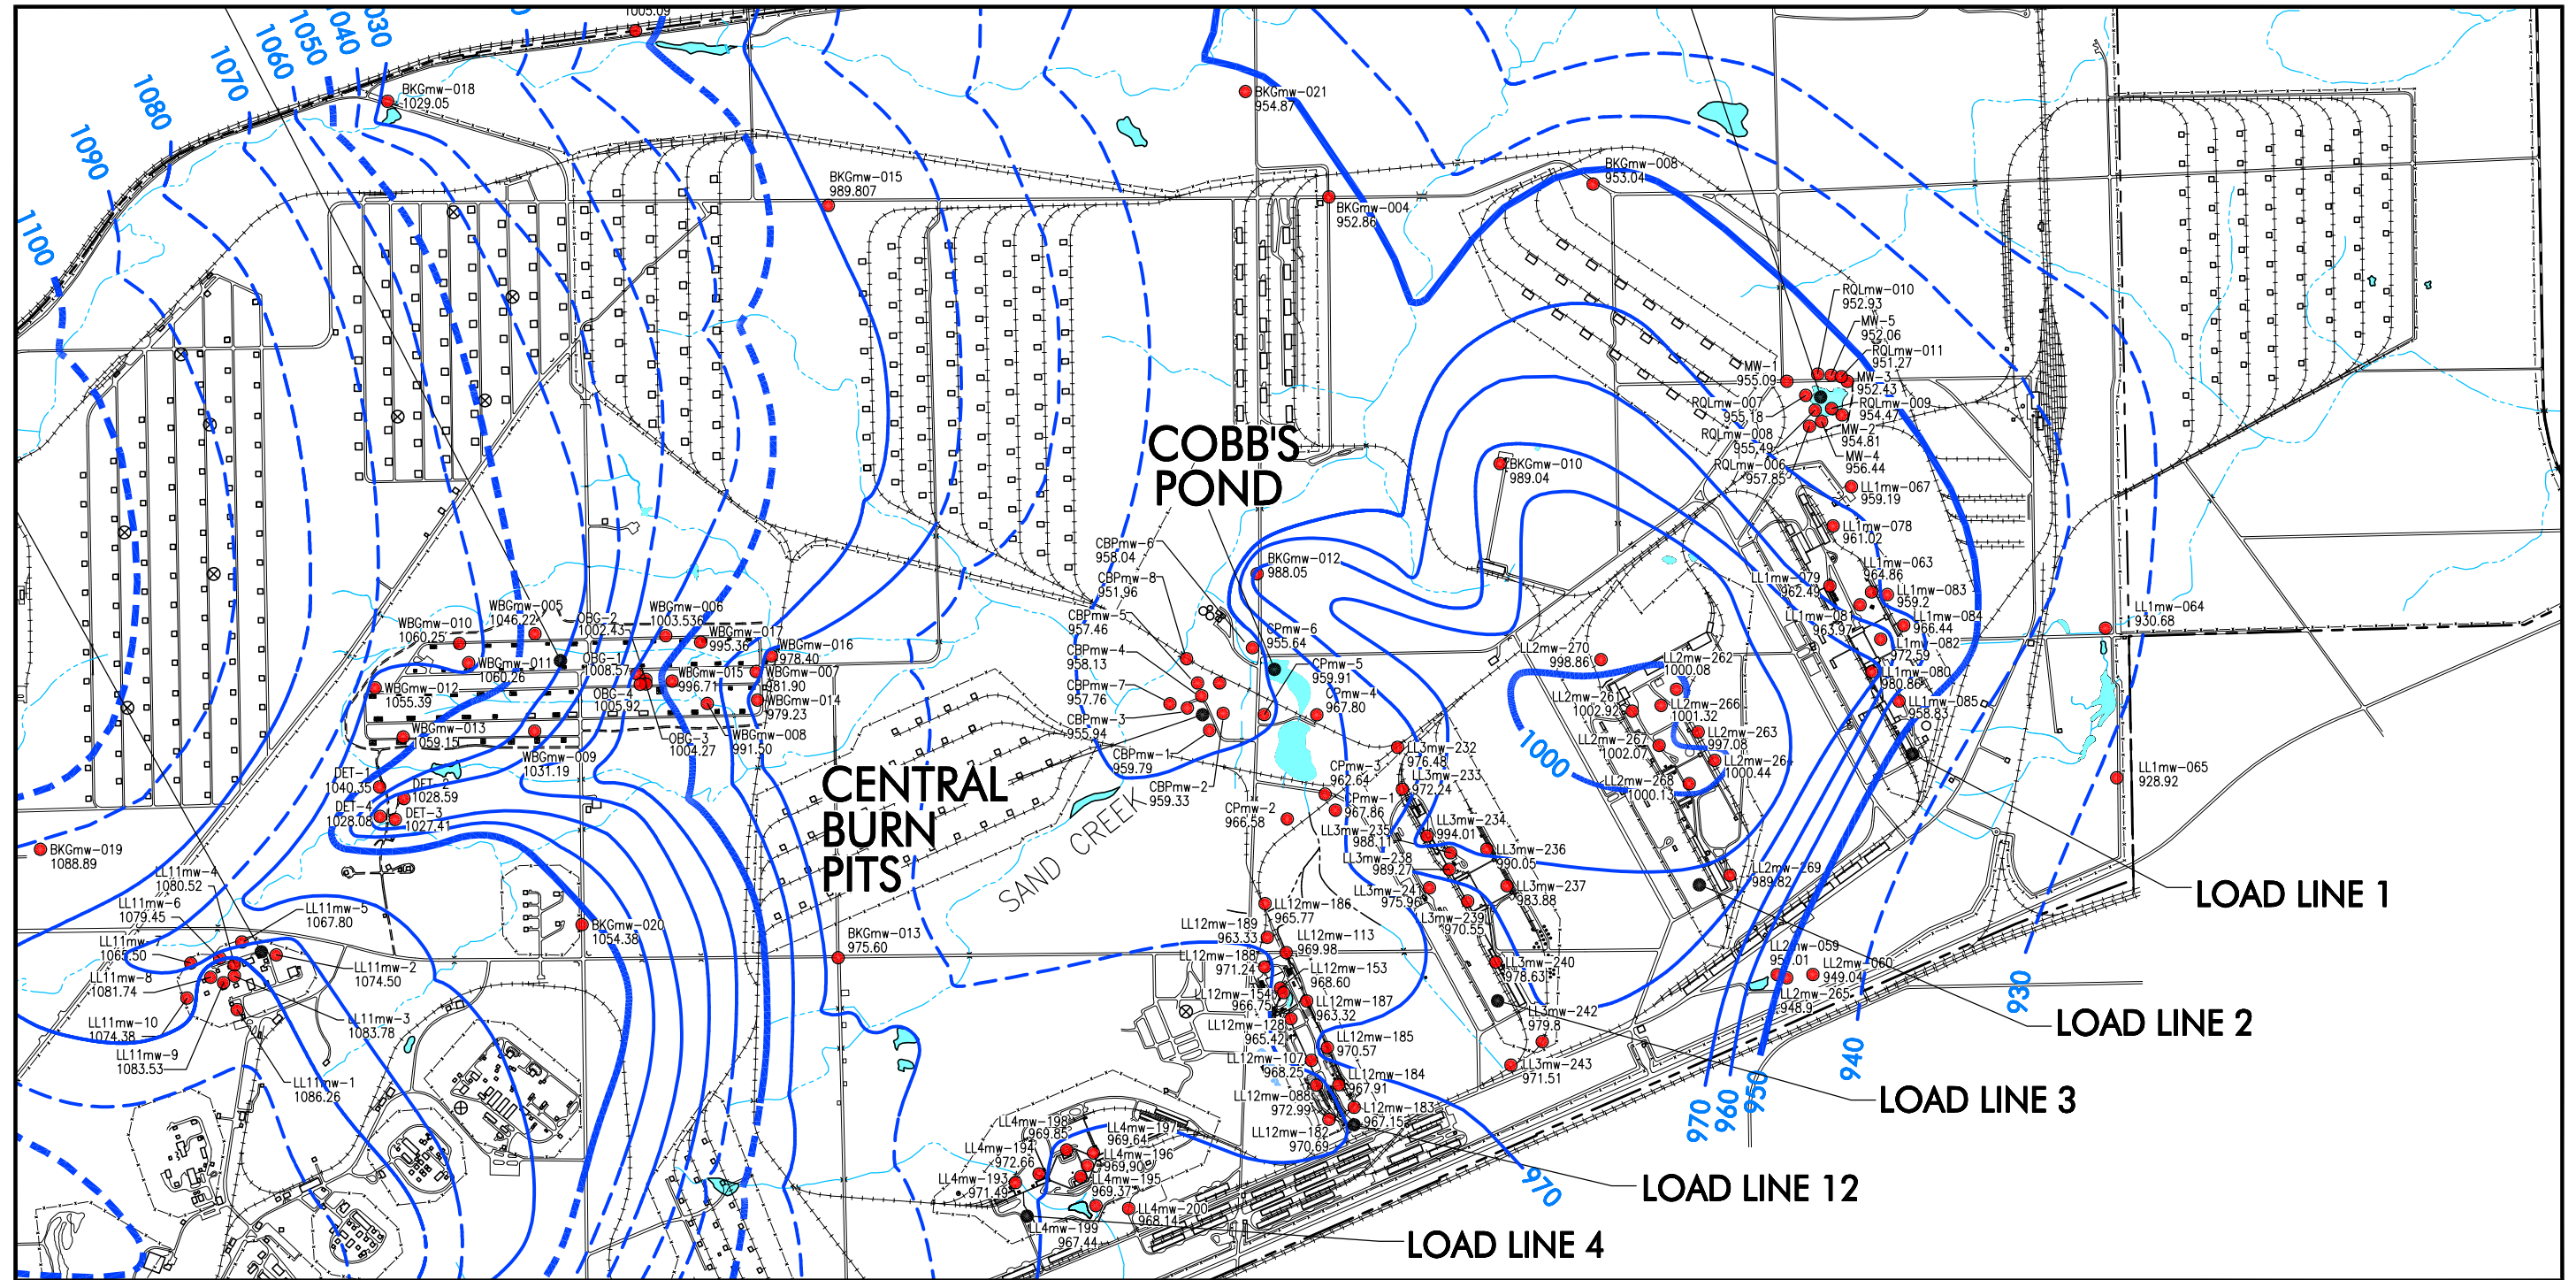


**LEGEND:**

- PRIMARY BUILDING
- SECONDARY BUILDING
- ASPHALT ROAD
- GRAVEL ROAD
- RAILROAD TRACKS
- FENCE LINE
- STREAM
- POND
- MONITORING WELL LOCATION
- RVAAP FACILITY BOUNDARY
- POTENTIOMETRIC SURFACE
- INFERRED POTENTIOMETRIC SURFACE
- 1093.79.....POTENTIOMETRIC SURFACE ELEVATION

**NOTES:**

- 1.) POTENTIOMETRIC MAP BASED ON FACILITY-WIDE WATER LEVEL MEASUREMENTS COLLECTED AUGUST 27/28, 2001. CONTOUR INTERVAL IS 10 FT.
- 2.) POTENTIOMETRIC SURFACE ELEVATIONS ARE IN FEET ABOVE MEAN SEA LEVEL.

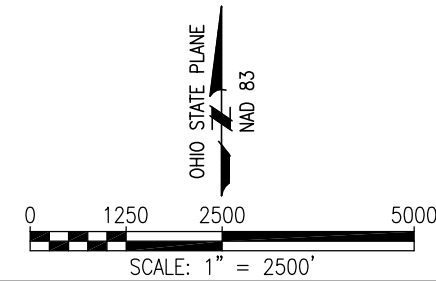

U.S. ARMY ENGINEER DISTRICT CORPS OF ENGINEERS LOUISVILLE, KENTUCKY US Army Corps of Engineers Louisville District		
<b>RVAAP FACILITY-WIDE POTENTIOMETRIC                  GROUNDWATER SURFACE                  AUGUST, 2001</b>		
DRAWN BY: S. DUNLAP	REV. NO./DATE: 0 / 04-08-03	CAD FILE: /00066/DWGS/R73POTN4

Figure 2-4. Facility-wide Potentiometric Map, August 2001



The facility-wide potentiometric map shows that the water table surface is a subdued representation of the topography of the region. The predominant groundwater flow direction is to the east, with water table elevations decreasing from a high of about 346 m (1,136 ft) amsl at well BKGmw-063 in the northwest portion of the facility to a low of about 283 m (928 ft) amsl southeast of Load Line 1 (well LL1mw-065). A potentiometric high centered around Load Line 2 is indicated in the southeastern portion of RVAAP. This potentiometric high results in localized radial flow vectors in this portion of the facility. A groundwater divide is inferred in the western portion of the facility based on surface stream and topographic elevations, although little potentiometric data exist in this region to confirm its presence.

At the watershed scale (i.e., Sand Creek, Hinkley Creek, South Fork of Eagle Creek), groundwater flow generally mirrors surface drainage patterns. Regional drainage patterns along Sand Creek in the northeast portion of RVAAP result in a localized perturbation in the overall flow direction to the north-northeast. In several locations along the southern boundary of RVAAP, south-southeast perturbations in the overall observed groundwater flow patterns are observed as follows:

- a localized south-southeasterly flow component from the potentiometric high area centered around Load Lines 1, 2, and 3 toward the facility boundary;
- a localized southerly flow component toward the facility boundary from the southernmost portion of Load Line 12;
- a localized southerly flow component toward the facility boundary from Load Line 4, which mirrors the direction of surface water flow in the unnamed tributary that drains this load line; and
- groundwater flow to the south in association with Hinkley Creek in the southwest portion of the site (i.e., NACA Test Area and Demolition Area 1 vicinity).

The potentiometric surface may be interpreted with a higher degree of confidence in the southeastern portion of RVAAP than in many other areas of the facility because of the density of monitoring wells present (i.e., vicinity of Cobbs Pond, Ramsdell Quarry, Load Lines 1 through 4, and Load Line 12). The potentiometric surface and water table gradients in the vicinity of Cobbs Pond, Load Line 12, and Load Line 4 are subdued when compared to other portions of RVAAP, and they appear to be influenced by the abundant large surface water features and wetlands present in these areas.

Greater uncertainty in interpretation of groundwater flow directions exists in the vicinity of Load Line 12 and Demolition Area 2. Potential subsurface geologic heterogeneities in the vicinity of Load Line 12 create a complex potentiometric surface that is difficult to interpret with existing data. An apparent narrow potentiometric low oriented in a north-south direction extends along the central portion of Load Line 12 from South Service Road towards Cobbs Pond. This potentiometric low was also evident from water table data collected during 2000, and, as presented in the Load Line 12 Phase II RI Report (USACE 2001a), may be a representation of a zone of higher permeability, such as a channel deposit.

In the vicinity of Demolition Area 2, steep potentiometric gradients are inferred based on data from wells that existed in the area as of August 2001. Additional monitoring wells were installed at this AOC in the fall of 2002 as part of a Phase II RI. Data from the new Demolition Area 2 wells need to be included in any subsequent assessment of facility-wide potentiometric elevations and may alter the interpretation of gradients in this area.

#### 2.4.1.4 Surface water system

The entire RVAAP facility is situated within the Ohio River Basin, with the West Branch of the Mahoning River representing the major surface stream in the area. This stream flows adjacent to the western end of the facility, generally from north to south, before flowing into the Michael J. Kirwan Reservoir that is located to the south of State Route 5. The West Branch flows out of the reservoir along the southern facility boundary before joining the Mahoning River east of RVAAP.

The western and northern portions of RVAAP are characterized by low hills and dendritic surface drainage. The eastern and southern portions are characterized by an undulating to moderately level surface, with less dissection by surface drainage. Numerous wetland areas occur on the facility. Three primary watercourses drain RVAAP: the South Fork of Eagle Creek, Sand Creek, and Hinkley Creek.

Sand Creek, with a drainage area of 36 square km (13.9 square miles), flows generally northeast to its confluence with the South Fork of Eagle Creek. In turn, the South Fork of Eagle Creek then continues in a northerly direction for 7 km (2.7 miles) to its confluence with Eagle Creek. The drainage area of the South Fork of Eagle Creek is 67.9 square km (26.2 square miles), including the area drained by Sand Creek. Hinkley Creek, with a drainage area of 28.5 square km (11.0 square miles), flows in a southerly direction through the installation to its confluence with the West Branch of the Mahoning River south of the facility.

Approximately 50 ponds are scattered throughout the installation. Many were built within natural drainageways to function as settling ponds or basins for process effluent and runoff. Others are natural glacial depressions or result from beaver activity. All water bodies at RVAAP support an abundance of aquatic vegetation and are well stocked with fish. None of the ponds within the installation are used as water supply sources.

Storm water runoff is controlled primarily by natural drainage, except in facility operations areas where extensive storm sewer networks and surface ditches help to direct runoff to streams and settling ponds. In addition, the storm sewer and drainage ditch systems were one of the primary drainage mechanisms for process effluent during the period that production facilities were in operation.

#### 2.4.2 Load Line 4 Hydrologic/Hydrogeologic Setting

All wells at Load Line 4 were screened within the unconsolidated zone, with most screens either entirely or partially within the silty sand to sand interval, which was present at depths ranging from 2.1 to 6.1 m (7 to 20 ft) bgs, as discussed in Section 2.3.2.1. A potentiometric surface map specific to Load Line 4 is provided in [Figure 2-5](#). This map was constructed using static water level data from eight monitoring wells installed during the Phase II RI and reflects flow conditions established as part of the facility-wide potentiometric evaluation. In general, the potentiometric surface is a subdued replica of the topography within the AOC and shallow groundwater flow is to the south and off of the AOC consistent with surface water drainage patterns.

Results of slug tests performed at the eight monitoring wells during September 2001 indicate low to moderate hydraulic conductivities in the unconsolidated sediments ranging from  $2.92 \times 10^{-3}$  cm/sec (8.23 ft/day) to  $4.05 \times 10^{-5}$  cm/sec ( $1.15 \times 10^{-1}$  ft/day) ([Table 2-1](#)). Slug test results are representative of the entire screened interval for the monitoring wells; therefore, any local heterogeneity that affects hydraulic conductivity within the screened interval, such as clay lenses, will be represented in the slug test.

The primary surface water conveyance at Load Line 4 enters the AOC from the west and is sourced from comparatively undisturbed areas. This stream is perennial and contains a substantial amount of flow during the majority of the year. From its entrance point, the stream crosses the AOC from northwest to

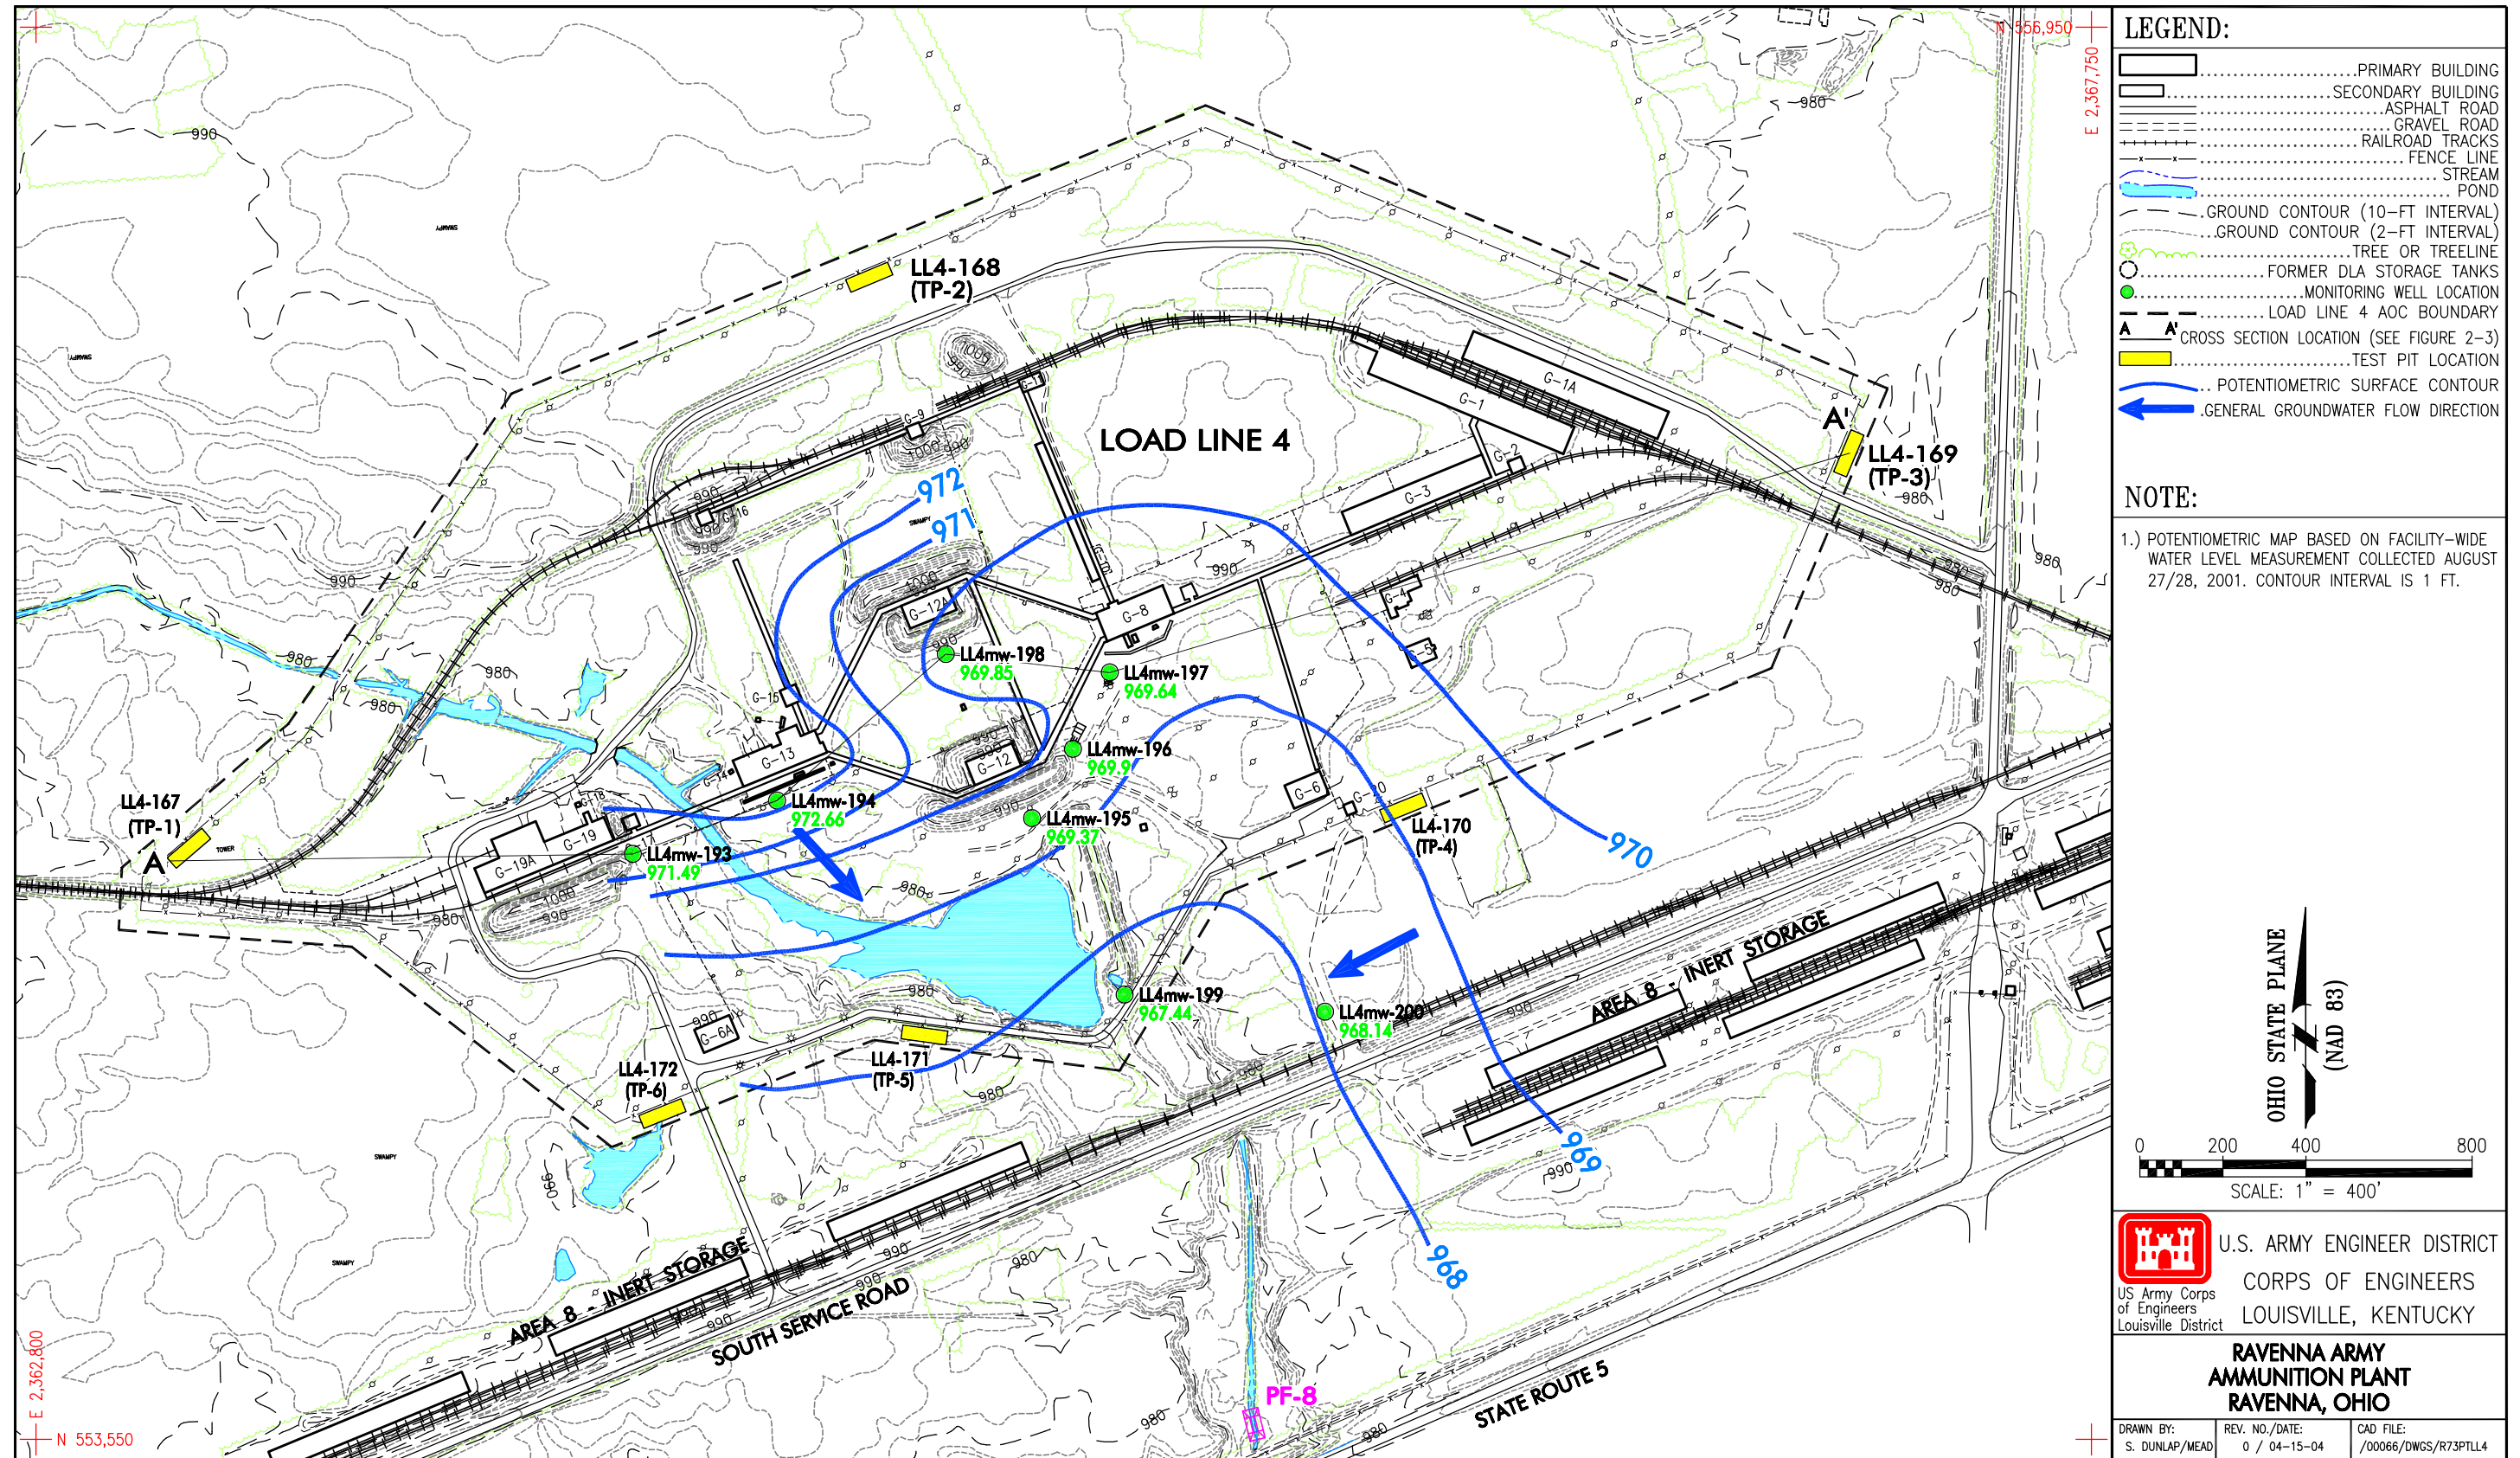


Figure 2-5. Potentiometric Groundwater Surface at Load Line 4, August 2001

**Table 2-1. Horizontal Hydraulic Conductivities in Phase II RI Monitoring Wells**

<b>Monitoring Well ID</b>	<b>Total Depth (ft bgs)</b>	<b>Screened Interval (ft bgs)</b>	<b>Lithology in Screened Interval</b>	<b>Rising-Head or Falling-Head Test</b>	<b>Slug-Test-Determined Hydraulic Conductivity (cm/sec)</b>
LL4mw-193	24.31	11.3 to 21.3	Unconsolidated sediment	Rising	4.05E-05
LL4mw-194	23.81	11.3 to 21.3	Unconsolidated sediment	Rising	1.69E-04
LL4mw-195	22.85	10.32 to 20.32	Unconsolidated sediment	Rising	1.32E-04
LL4mw-196	21.76	9.17 to 19.17	Unconsolidated sediment	Rising	2.92E-03
LL4mw-197	23.61	11.8 to 21.8	Unconsolidated sediment	Rising	8.36E-05
LL4mw-198	21.9	10.3 to 20.3	Unconsolidated sediment	Rising	8.19E-05
LL4mw-199	23.25	10.3 to 20.3	Unconsolidated sediment	Rising	6.66E-05
LL4mw-200	25.24	12.6 to 22.6	Unconsolidated sediment	Rising	4.80E-05

bgs = Below ground surface.  
 ID = Identification.  
 RI = Remedial Investigation.

southeast and flows into the large settling pond. A standpipe controls water levels in the settling pond. Drainage from the pond flows southeast off of the AOC where it exits RVAAP at PF-8. Storm drainage ditches comprise the remaining surface water conveyances; these contain flow only intermittently during rain events or snow melt. Drainage ditches in most of the load line ultimately drain into the main stream or the settling pond. Of particular interest are a pair of drainage ditches that convey intermittent flow from Building G-12 and the former settling basin to the pond; the ditch from the settling basin transported pink water effluent when the line was in operation. In the northeast portion of the load line, in the vicinity of Buildings G-1 through G-5, surface water drainage is to the northeast off of the AOC via several drainage ditches. None of these ditches contain water except during rainfall events. Most of the surface water, like groundwater, runoff is to the south.

A below ground storm sewer system also exists at Load Line 4 for management of storm water runoff. Runoff is collected at a series of inlets located adjacent to the primary buildings and along roadways. Termination points for the storm sewer system include the drainage ditches and main stream noted above. Flow was observed in the some of the storm sewers during a site walkover in spring 2001, indicating that groundwater influx into portions of the system (at cracks or joints in the pipe) occurs during wet seasons of the year.

## 2.5 CLIMATE

RVAAP has a humid continental climate characterized by warm, humid summers and cold winters. Precipitation varies widely through the year. The driest month is, on average, July, and the wettest month is February. Data from the National Weather Service compiled over the past 47 years indicate that the average rainfall for the area is 98 cm (38.72 in.) annually. The average snowfall is 108 cm (42.4 in.) annually. Severe weather, in the form of thunder and hail in summer and snowstorms in winter, is common.

Tornadoes are infrequent in Portage County. The Phase II RI was conducted during the historically dry portion of the year (summer/autumn), but overall, climate conditions for the year were normal.

## **2.6 POTENTIAL RECEPTORS**

### **2.6.1 Human Receptors**

RVAAP consists of 8,998.3 ha (21,419 acres) and is located in northeastern Ohio, approximately 37 km (23 miles) east-northeast of Akron and 48.3 km (30 miles) west-northwest of Youngstown. RVAAP occupies east-central Portage County and southwestern Trumbull County. The 2000 Census lists the total populations of Portage and Trumbull counties at 152,061 and 225,116, respectively. Population centers closest to RVAAP are Ravenna, with a population of 11,771, and Newton Falls, with a population of 5,002. Approximately 55% of Portage County, in which the majority of RVAAP is located, consists of either woodland or farm acreage. The Michael J. Kirwan Reservoir (also known as West Branch Reservoir) is the closest major recreational area and is adjacent to the western half of RVAAP south of State Route 5.

RVAAP is located in a rural area, is not accessible to the general public, and is not near any major industrial or developed areas. The facility is completely fenced and patrolled by security personnel. Army and full-time operating contractor staff (i.e., security, grounds, and maintenance workers) are located on-site. Additional subcontractor staff are on-site for varying periods of time, ranging from several weeks to more than 12 months to complete specific demolition/decommissioning projects. Training activities, outside of AOCs, under the OHARNG Ravenna Training and Logistics Site (RTLS) involve an average of 4,500 personnel during the course of a month, who are on-site for periods of 3 days (inactive duty or weekend training) to 2 weeks (annual training). OHARNG-RTLS training is restricted to areas outside of AOCs. No OHARNG-RTLS training is conducted within Load Line 4.

Load Line 4 is located in the southeastern corner of RVAAP and is not currently used for OHARNG training activities. Some workers will be present during future demolition activities, which are currently suspended pending additional funding and desensitization of buildings for explosive compounds. The former production area is surrounded by a security fence and locked gates. Groundskeeping activities are limited to infrequent mowing and brush clearing along the perimeter areas outside of the AOC boundary fence. Six to 12 deer hunts take place at RVAAP during weekends each year in October and November. Load Line 4 is not presently included in the deer hunting program. Recently, RVAAP instituted a limited catch and release fishing program, which includes Upper and Lower Cobb's Ponds. Security activities consist of gate checks and surveillance along South Service Road. Potential future land uses for Load Line 4 and the immediate vicinity under the March 2003 OHARNG reuse program include mounted training with no digging. Potential identified uses for surface water include waterfowl hunting, trapping, fishing, and fire and dust suppression. Additional information on future land uses is included in Chapter 6.0, Section 6.3.1.

### **2.6.2 Ecological Receptors**

The dominant types of vegetative cover at RVAAP, including portions of Load Line 4 and its immediate surroundings, are forests and old fields of various ages. More than 60% of RVAAP is now in forest (OHARNG 2001). Most of the old field cover is the result of earlier agricultural practices that left these sites with poor topsoil, which limits forest regeneration. Several thousand acres of agricultural fields were planted in trees during the 1950s and 1960s, but these plantings were not successful in areas with poor topsoil. Some fields, leased for cattle grazing during the same time period, were delayed in their reversion to forest. A few fields have been periodically mowed, maintaining them as old field, and 36 ha (90 acres)

are leased as hay fields. Load Line 4 is covered with newly seeded grass and scrub within the former production area and forested areas and old field in the non-production areas.

Forested wetlands, scrub-shrub wetlands, isolated wetlands and wetlands associated with surface water features are abundant at RVAAP (OHARNG 2001). It is estimated that at least one-third to one-half of the property would meet the criteria for a jurisdictional wetland (OHARNG 2001). Jurisdictional wetland delineations are expensive and not practical for general planning purposes but can be done to support specific projects. Various wetland maps are available for RVAAP, including the U. S. Fish and Wildlife Service National Wetlands Inventory (NWI) Maps, USACE Waterways Experiment Station maps of primary wetland areas, and U. S. Geological Survey identification of potential wetlands in Training Areas (OHARNG 2001). All of these maps are useful planning tools, but do not provide jurisdictional delineations suitable for compliance with Section 404 of the Clean Water Act (OHARNG 2001). There have been two jurisdictional delineations done in recent years to support National Environmental Protection Act requirements of specific project proposals (OHARNG 2001).

The wetland acreage identified on the NWI maps is unknown but is much less than one-third to one-half of the installation acreage (OHARNG 2001). The USACE Water Experiment Station maps of primary wetland areas, as interpreted from aerial photographs of the installation, identify only 1,917 acres of wetlands at RVAAP (OHARNG 2001). The mapped wetlands do not identify a lot of the forested and scrub-shrub wetland communities and do not fully encompass the extent of wetlands likely present at RVAAP.

There are 12 types of wetland communities present at RVAAP (OHARNG 2001). Most of these wetlands exist because of poorly drained and hydric soils. Beaver impoundments contribute to wetland diversification in some parts of the RVAAP. Limited wetland areas exist along the main stream and settling pond with in Load Line 4.

The flora and fauna at RVAAP are varied and widespread. No federal threatened or endangered or candidate threatened or endangered species have been observed on RVAAP. A list of state endangered, state threatened or potentially threatened, and state special interest species confirmed to be on RVAAP is provided in [Table 2-2](#) (Morgan 2000). Additionally, five rare plant communities/significant natural areas have been identified on RVAAP, including the northern woods, Wadsworth Glen, Group 3 woods, B&O Wye Road area, and South Patrol Road swamp forest.

Controlled land use and sound forest management practices have preserved and enabled large forest tracts to mature. Habitat conversion at RVAAP, unlike most other habitat conversions occurring nationwide, has been toward restoration of the forests that covered the area prior to its being cleared for agriculture. The reversion of these agricultural fields to mature forest provides a diverse habitat from old field through several successional stages. Overall, the trend toward forest cover enhances the area for use by both plant and animal forest species. Future IRP activities will require consideration of these species to ensure that detrimental effects on threatened or endangered RVAAP flora and fauna do not occur; this will be discussed in the ERA (Chapter 7.0). There are no federal, state, or local parks or protected areas on RVAAP property.

## **2.7 PRELIMINARY CONCEPTUAL SITE MODEL**

The facility-wide hydrogeologic CSM for RVAAP presented in the Facility-wide SAP is applicable to Load Line 4. The CSM for RVAAP, operational information, and data collected during the Phase I RI at Load Line 4 (USACE 1998) were used to develop the preliminary Load Line 4 CSM, as outlined below. The preliminary CSM was used to develop sampling rationales and DQOs for the Phase II RI SAP

Table 2-2. RVAAP Rare Species List as of 2003

A. State Endangered		
1.	Northern harrier, <i>Circus cyaneus</i>	
2.	Common barn owl, <i>Tyto alba</i>	
3.	Yellow-bellied sapsucker, <i>Sphyrapicus varius</i>	
4.	Mountain brook lamprey, <i>Ichthyomyzon greeleyi</i>	
5.	Graceful underwing, <i>Catocala gracilis</i>	
6.	Ovate spikerush, <i>Eleocharis ovata</i> (Blunt spike-rush)	
7.	Lurking leskea, <i>Plagiothecium latebricola</i>	
8.	Little blue heron, <i>Egretta caerulea</i> (suspected)	
9.	American bittern, <i>Botaurus lentiginosu</i> (migrant)	
10.	Canada warbler, <i>Wilsonia canadensis</i> (migrant)	
11.	Osprey, <i>Junco hyemalis</i> (migrant)	
12.	Trumpeter swan, <i>Cygnus buccinator</i> (migrant)	
13.	Little blue heron, <i>Egretta caerulea</i> (migrant)	
B. State Threatened		
1.	Simple willow-herb, <i>Epilobium strictum</i>	
C. State Potentially Threatened		
1.	Gray birch, <i>Betula populifolia</i>	
2.	Round-leaved sundew, <i>Drosera rotundifolia</i>	
3.	Closed gentian, <i>Gentiana clausa</i>	
4.	Butternut, <i>Juglans cinerea</i>	
5.	Blunt mountain-mint, <i>Pycnanthemum muticum</i>	
6.	Northern rose azalea, <i>Rhododendron nudiflorum</i> var. <i>roseum</i>	
7.	Large cranberry, <i>Vaccinium macrocarpon</i>	
8.	Hobblebush, <i>Viburnum alnifolium</i>	
9.	Long beech fern, <i>Phegopteris connectilis</i>	
10.	Woodland horsetail, <i>Equisetum sylvaticum</i>	
11.	Weak sedge, <i>Carex debilis</i> var. <i>debilis</i>	
12.	Straw sedge, <i>Carex straminea</i>	
13.	Water avens, <i>Geum rivale</i>	
14.	Tall St. John's wort, <i>Hypericum majus</i>	
15.	Swamp oats, <i>Sphenopholis pennsylvanica</i>	
16.	Shining ladies'-tresses, <i>Spiranthes lucida</i>	
D. State Special Interest		
1.	Sora, <i>Porzana carolina</i>	
2.	Virginia rail, <i>Rallus limicola</i>	
3.	Four-toed salamander, <i>Hemidactylum scutatum</i>	
4.	Smooth green snake, <i>Ophedrys vernalis</i>	
5.	Woodland jumping mouse, <i>Napaeozapus insignis</i>	
6.	Sharp-shinned hawk, <i>Accipiter striatus</i>	
7.	Solitary vireo, <i>Vireo solitarius</i>	
8.	Pygmy shrew, <i>Sorex hoyi</i>	
9.	Star-nosed mole, <i>Condylura cristata</i>	
10.	Red-shouldered hawk, <i>Buteo lineatus</i>	
11.	Henslow's sparrow, <i>Ammodramus henslowii</i>	
12.	Cerulean warbler, <i>Dendroica cerulea</i>	
13.	Common moorhen, <i>Gallinula chloropus</i>	
14.	Eastern box turtle, <i>Carolina carolina</i>	
15.	<i>Capperia evansi</i> (moth)	
16.	<i>Zanclognatha martha</i> (moth)	
17.	<i>Oligia bridghami</i> (moth)	
18.	<i>Chaetagnaea sericea</i> (moth)	
19.	<i>Sutyna privata</i> (moth)	
20.	<i>Homorthodes frufurata</i> (moth)	

Source: Morgan (2003a).

RVAAP = Ravenna Army Ammunition Plant.

Addendum. This preliminary CSM is refined in Chapter 8.0 to integrate the results of the Phase II RI evaluation of contaminant nature and extent, fate and transport modeling, and risk evaluations.

### ***Soil***

Previous sampling data at Load Line 4 show that contamination sources (represented by areas of soil contamination) are primarily the former operations areas. Elevated concentrations of explosives were observed primarily around Building G-8, the washout facility south of Building G-8, Buildings G-12 and G-12A, G-13, and G-17. Beryllium, cadmium, cobalt, lead, nickel, and zinc were the most abundant and concentrated of the metals detected in surface soil. PAHs and pesticide/PCB compounds were the dominant organic constituents and were found along the east side of Building G-8, the southeast corner of Building G-12, the east side of Building G-17, and at vacuum pump exhaust outlets at Building G-12.

### ***Sediment***

Sediment in ditches and tributaries represents a receptor medium for contaminants eroded or leached from source area soils and transported by storm runoff. In addition, sediment may function as a transport mechanism, considering that particulates with adsorbed contaminants may be re-suspended under turbulent flow conditions (e.g., during storm events) and migrate incrementally down stream. Operational data suggest that the ditches in the vicinity of former process areas represent the most likely locations where contaminants may have accumulated through erosional transport. Site characteristics and available field data show that the primary surface water and sediment exit pathway from Load Line 4 is the main stream traversing Load Line 4 and exiting the AOC along the south boundary. The large settling pond represents the principal point for contaminant accumulation within the AOC. Various intermittent storm drainage ditches are also potential accumulation points for contaminants. Some of these elements of the CSM have been confirmed by previous Phase I RI sediment sampling (see Section 1.3.3) at 14 locations within the main stream, settling pond, and drainage ditches.

### ***Surface Water***

Sampling of surface water from conveyances within and adjacent to Load Line 4 was not conducted during the Phase I RI. Surface water flows through storm drainage ditches to the main stream and settling pond and noted above, with an exit point off of RVAAP at PF-8 along State Route 5. Contaminants would be expected to leach or erode from source areas, become entrained in surface water (as dissolved phase and adsorbed to suspended particulates), migrate along drainage ditches or the storm sewer system, and enter the main stream system. Erosional transport of contaminants and migration through the surface water system is assumed to be primarily episodic in nature and related to storm events that flush the system and mobilize contaminated sediment.

### ***Groundwater***

Very limited hydrogeologic and analytical data existed for groundwater at Load Line 4 prior to the Phase II RI (see Section 1.3.3); therefore, an accurate assessment of groundwater flow patterns has previously not been possible. For the purposes of DQO development and investigation planning, the CSM at the time of Phase II scoping presumed that the general groundwater flow patterns followed site topography and surface water drainage patterns, which indicated an overall gradient from northwest to southeast. Because of the heterogeneous nature of the unconsolidated glacial deposits beneath the site, localized variants in the overall flow patterns and preferred migration pathways (i.e., sand or gravel stringers) were presumed to exist at the site. Also, based on site conditions, groundwater flow off of the AOC to the south, and potentially off of RVAAP, was considered a possibility.



Some analytical evidence for groundwater contamination by some SRCs identified in source area soils (e.g., metals, SVOCs) did exist for Load Line 4 prior to the Phase II RI. Analysis of samples from three temporary well points installed by direct-push methods detected 11 metals, some potentially site related, and cyanide. Potential source area SRCs identified during the Phase I RI have low mobility in groundwater. Because of the limited nature of the available data, contaminant migration from source areas to groundwater (via leaching or surface water infiltration) was identified as a key data gap to be addressed under the Phase II RI.

### ***Utilities***

The storm and sanitary sewer system present at Load Line 4 may represent an accumulation point for contaminants introduced to the system via floor and sink drains during AOC operations. Discharge of the storm sewer system to surface drainage ditches represents an exit pathway for contaminants mobilized from source areas via runoff. Portions of the system are suspected to be below the water table because some of the lines were observed to contain water during site reconnaissance and sampling. Considering the age of the system, cracks or gaps in the piping likely allow groundwater influx. Any accumulated contaminants in sludge or sediment in the piping may represent a source term to groundwater. Also, the system may function as a preferential migration pathway for shallow groundwater transport.

### ***Current Site Conditions***

The current potential for human exposure to potential contaminants migrating from the site is mitigated by inactivity at the site, the absence of permanent residents, and the low population density on adjacent private properties. In the non-production areas, no evidence of substantial ecological stress was observed during the field investigation.

**THIS PAGE INTENTIONALLY LEFT BLANK.**